

# AR14J | Boom

<b>Working height</b>	<b>16.09m</b>
<b>Outreach</b>	<b>7.67m</b>
Closed Length	6.77m
Closed Height	2.17m
Closed Width	2.31m
Deck Size	1.83m x 0.76m
Rotation	355°
SWL	230kg
Weight	7160kg


## Alternative machines

45AJ  
Z4525DJX  
SJ46AJ  
HA16RTJ

## Manufacturer

LGMG

## Working envelope

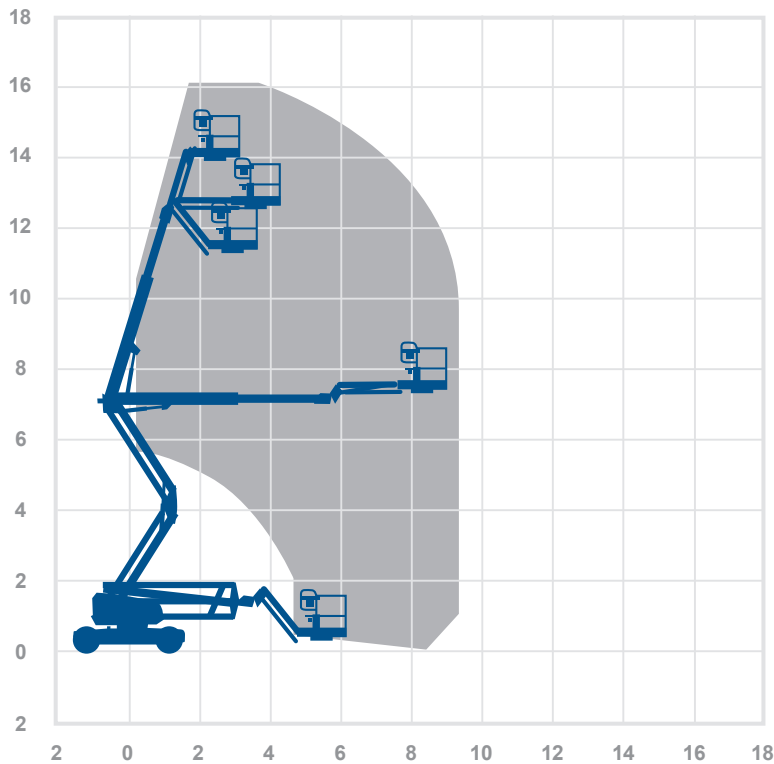

## Standard features



## Optional features



**0345 745 0000**  
[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide  
Platforms**  
A **LOXAM** Company


# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**


## Height and outreach

Working height  Horizontal outreach 

### Z51D | Boom

<b>Working height</b>	<b>17.59m</b>	<b>Alternative machines</b>
<b>Outreach</b>	<b>9.37m</b>	N/A
Closed Length	7.58m	<b>Manufacturer</b>
Closed Height	2.13m	Genie
Closed Width	2.29m	
Deck Size	1.83m x 0.76m	
Rotation	355°	
SWL	227kg	
Weight	7354kg	

**Working envelope**



**Standard features**

**Optional features**

**0345 745 0000**  
nationwideplatforms.co.uk

**Nationwide Platforms**  
A LOXAM Company

## Standard features

- |                               |                   |                          |                      |
|-------------------------------|-------------------|--------------------------|----------------------|
| Battery power                 | IPAF licence type | Straight telescopic boom | Self drive           |
| Diesel power                  | IPAF licence type | Non-marking tyres        | JIB rotation         |
| Lithium battery               | IPAF licence type | Outrigger legs           | Driving licence type |
| Hybrid power                  | IPAF licence type | Maximum people in cage*  | Power to platform    |
| Dual fuel option              | IPAF licence type | Push around vehicles     | Generator            |
| Gas power option              | Tracked           | Operator powered         |                      |
| Rough terrain (2 wheel drive) | Mast boom         | Indoor use only          |                      |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor           |                      |

## Optional extras

- |               |              |                               |                      |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® †   | SkyRakBoom®  | SkyScreen™                    | Wendy lighting frame |
| SkySiren® PCS | SkyRakMulti™ | Material handling attachments | Bucket               |
| SkySentry®    | SkyTel™      | Generator                     | Fork Extension       |
| SkyRak®       | SkyRakEdge™  | Camera pod                    | Fork Lifting Hook    |
| SkyRakPlus®   | SkyShield™   | Circular camera cage          |                      |

\* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.