

SJ16E | Low Level

Working height

6.72m

Closed Length	1.37m
Closed Height	1.88m
Closed Width	0.77m
Deck Size	0.91m x 0.69m
Rotation	N/A
SWL	227kg
Weight	931kg


Alternative machines

GR15
AMWP7-8100L
SJ16

Manufacturer

Skyjack

Working envelope

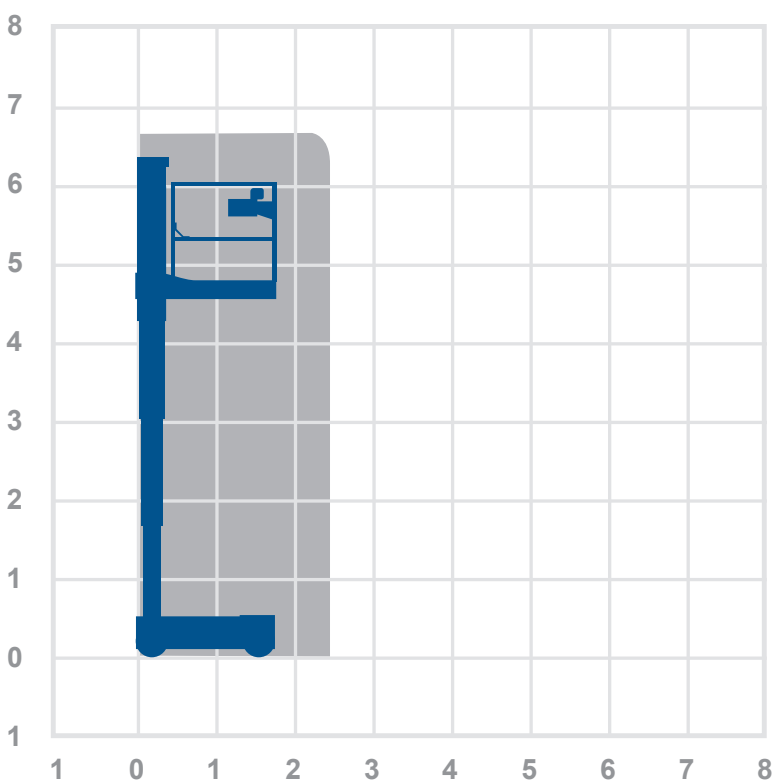

6.72m

Standard features



Optional features



0345 745 0000
nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

PECO-WR
| Low level

Working height	3.50m	Alternative machines
Closed Length	1.22m	N/A
Closed Height	1.55m	
Cad Width	1.15m	Manufacturer
Deck Size	0.72m x 0.60m	Power Towers
Rotation	N/A	
SWL	150kg	
Weight	245kg	

Working envelope

Standard features
Optional features

0345 745 0000
nationwideplatforms.co.uk

Height and outreach

Working height Horizontal outreach

Standard features

- | | | | |
|-------------------------------|-------------------|--------------------------|----------------------|
| Battery power | IPAF licence type | Straight telescopic boom | Self drive |
| Diesel power | IPAF licence type | Non-marking tyres | JIB rotation |
| Lithium battery | IPAF licence type | Outrigger legs | Driving licence type |
| Hybrid power | IPAF licence type | Maximum people in cage* | Power to platform |
| Dual fuel option | IPAF licence type | Push around vehicles | Generator |
| Gas power option | Tracked | Operator powered | |
| Rough terrain (2 wheel drive) | Mast boom | Indoor use only | |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor | |

Optional extras

- | | | | |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® † | SkyRakBoom® | SkyScreen™ | Wendy lighting frame |
| SkySiren® PCS | SkyRakMulti™ | Material handling attachments | Bucket |
| SkySentry® | SkyTel™ | Generator | Fork Extention |
| SkyRak® | SkyRakEdge™ | Camera pod | Fork Lifting Hook |
| SkyRakPlus® | SkyShield™ | Circular camera cage | |

* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.