

SJ4726 | Scissor Lift

Working height

9.82m

Closed length	2.33m
Closed height	2.29m
Stowed height (guardrails lowered)	1.9m
Closed width	1.19m
Platform size	2.10m x 1.06m
Platform length (deck extended)	3.33m
Max SWL	454kg
Weight	2965kg


Alternative machines

COM10
4626

Manufacturer

Skyjack

Working envelope

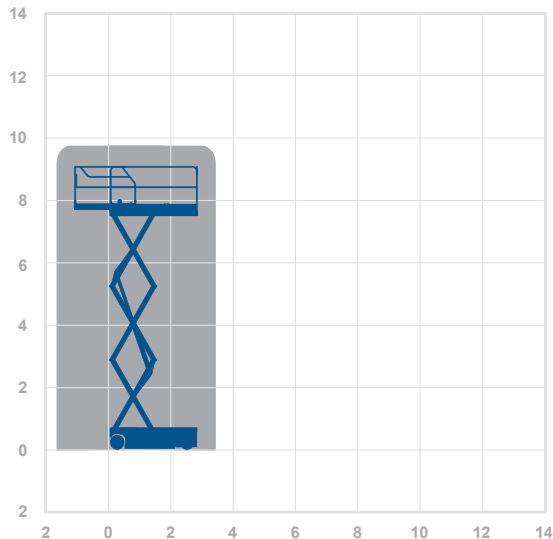

9.82m

Standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Height and outreach

Working height Horizontal outreach

AMWP11.5-8100 | Boom Lift

<table border="0"> <tr><td>Working height</td><td>11.2m</td></tr> <tr><td>Horizontal outreach</td><td>3m</td></tr> <tr><td>Closed length</td><td>2.55m</td></tr> <tr><td>Closed height</td><td>1.90m</td></tr> <tr><td>Closed width</td><td>1m</td></tr> <tr><td>Rotation</td><td>345°</td></tr> <tr><td>Platform height</td><td>0.2m</td></tr> <tr><td>Max SWL</td><td>200kg</td></tr> <tr><td>Weight</td><td>2000kg</td></tr> <tr><td>Deck size</td><td>0.62m x 0.870m</td></tr> </table>	Working height	11.2m	Horizontal outreach	3m	Closed length	2.55m	Closed height	1.90m	Closed width	1m	Rotation	345°	Platform height	0.2m	Max SWL	200kg	Weight	2000kg	Deck size	0.62m x 0.870m	<table border="0"> <tr><td colspan="2">Alternative machines</td></tr> <tr><td>Star 10</td><td>Star 10A</td></tr> <tr><td colspan="2">Manufacturer</td></tr> <tr><td colspan="2">Orlth</td></tr> </table>	Alternative machines		Star 10	Star 10A	Manufacturer		Orlth	
Working height	11.2m																												
Horizontal outreach	3m																												
Closed length	2.55m																												
Closed height	1.90m																												
Closed width	1m																												
Rotation	345°																												
Platform height	0.2m																												
Max SWL	200kg																												
Weight	2000kg																												
Deck size	0.62m x 0.870m																												
Alternative machines																													
Star 10	Star 10A																												
Manufacturer																													
Orlth																													

Working envelope

Standard features

Optional extras

0345 745 0000
nationwideplatforms.co.uk
Nationwide Platforms
A LEMAR Company

Standard features

- | | | | |
|-------------------------------|-------------------|--------------------------|---------------------------|
| Battery power | IPAF licence type | Straight telescopic boom | Self drive |
| Diesel power | IPAF licence type | Non-marking tyres | J1B rotation |
| Lithium battery | IPAF licence type | Outrigger legs | IPAF driving licence type |
| Hybrid power | IPAF licence type | Maximum people in cage* | Power to platform |
| Dual fuel option | IPAF licence type | Push around vehicles | Generator |
| Gas power option | Tracked | Operator powered | |
| Rough terrain (2 wheel drive) | Mast boom | Indoor use only | |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor | |

Optional extras

- | | | | |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® | SkyRakPlus® | SkyRakEdge™ | Generator |
| SkySiren® PCS | SkyRakBoom® | SkyShield™ | Camera pod |
| SkySentry® | SkyRakMulti™ | SkyScreen™ | Circular camera cage |
| SkyRak® | SkyTel™ | Material handling attachments | Wendy lighting frame |

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.