

# VI14GS | Van Mounted

<b>Working height</b>	<b>13.75m</b>
<b>Outreach</b>	<b>7.8m</b>
Closed length	7.0m
Closed height rails up / Fixed rails	3.45m
Closed width	2.2m
Deck size	1.0m x 0.6m
SWL	250kg
Weight	5000kg
Full operational width	2.25m
Minimum operational width	2.25m
Overall spare payload (Vans)	900kg


## Alternative machines

V14E  
VM14GS

## Manufacturer

GSR

## Working envelope

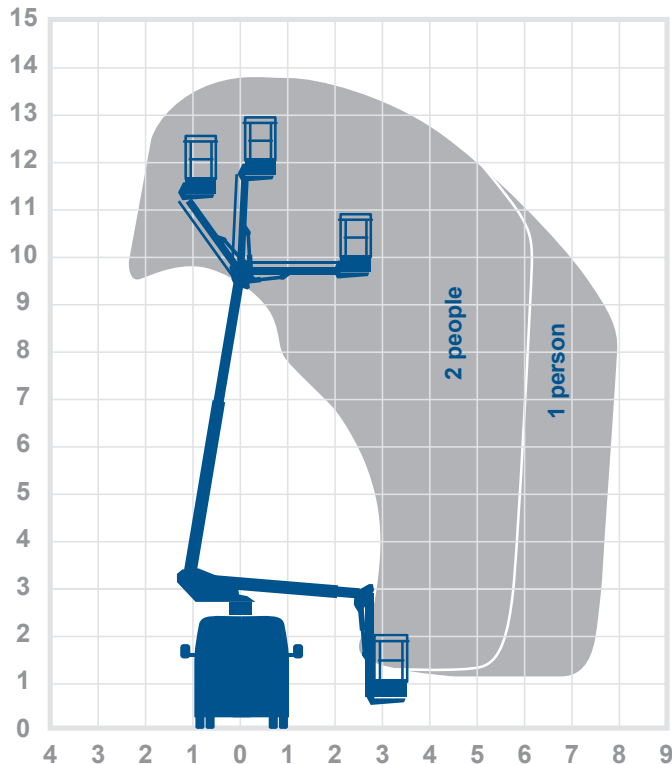

13.75m  
7.8m

## Standard features



## Optional features



**0345 745 0000**  
[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide  
Platforms**  
A **LOXAM** Company

# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

## Height and outreach

Working height Horizontal outreach

KL38 | Van Mounted

<b>Working height</b>	13.8m	<b>Alternative machines</b>
<b>Outreach</b>	8.0m	VT12E VT125K
Closed length	6.51m	<b>Manufacturer</b>
Closed height rails up / Fixed rails	3.3m	
Closed width	2.2m	Klubb
Deck size	1.1m x 0.6m	
SWL	200kg	
Weight	3500kg	
Full operational width	2.5m	
Minimum operational width	2.5m	
Overall spare payload (Vans)	200kg	

**Working envelope**

13.8m  
2.0m

**Standard features**

**Optional features**

**0345 745 0000**  
nationwideplatforms.co.uk

**Nationwide Platforms**  
A LOXAM Company

## Standard features

- |  |  |   |
|--|--|---|
| <ul style="list-style-type: none"> <li> Battery power</li> <li> Diesel power</li> <li> Lithium battery</li> <li> Hybrid power</li> <li> Dual fuel option</li> <li> Gas power option</li> <li> Rough terrain (2 wheel drive)</li> <li> Rough terrain (4 wheel drive)</li> </ul> | <ul style="list-style-type: none"> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> Tracked</li> <li> Mast boom</li> <li> Articulating boom</li> </ul> | <ul style="list-style-type: none"> <li> Straight telescopic boom</li> <li> Non-marking tyres</li> <li> Outrigger legs</li> <li> Maximum people in cage*</li> <li> Push around vehicles</li> <li> Operator powered</li> <li> Indoor use only</li> <li> Indoor/Outdoor</li> </ul> |
|  |  | <ul style="list-style-type: none"> <li> Self drive</li> <li> JIB rotation</li> <li> Driving licence type</li> <li> Power to platform</li> <li> Generator</li> </ul>   |

## Optional extras

- |   |  |  |
|---|--|--|
| <ul style="list-style-type: none"> <li> SkySiren® †</li> <li> SkySiren® PCS</li> <li> SkySentry®</li> <li> SkyRak®</li> <li> SkyRakPlus®</li> </ul> | <ul style="list-style-type: none"> <li> SkyRakBoom®</li> <li> SkyRakMulti™</li> <li> SkyTel™</li> <li> SkyRakEdge™</li> <li> SkyShield™</li> </ul> | <ul style="list-style-type: none"> <li> SkyScreen™</li> <li> Material handling attachments</li> <li> Generator</li> <li> Power to platform</li> <li> Camera pod</li> </ul>   |
|   |  | <ul style="list-style-type: none"> <li> Circular camera cage</li> <li> Wendy lighting frame</li> <li> Bucket</li> <li> Fork Extension</li> <li> Fork Lifting Hook</li> </ul> |

\* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.