3225HRT | Scissor

Working height	32.0m
Closed length	6.73m
Closed height	4.13m
Closed height (guardrails lowered)	3.41m
Closed width	2.55m
Platform size (extended)	6.20m x 2.45m (8.3m)
SWL	1,000kg
Weight	24,610kg

Alternative machines

N/A

Manufacturer

Dingli

Working envelope

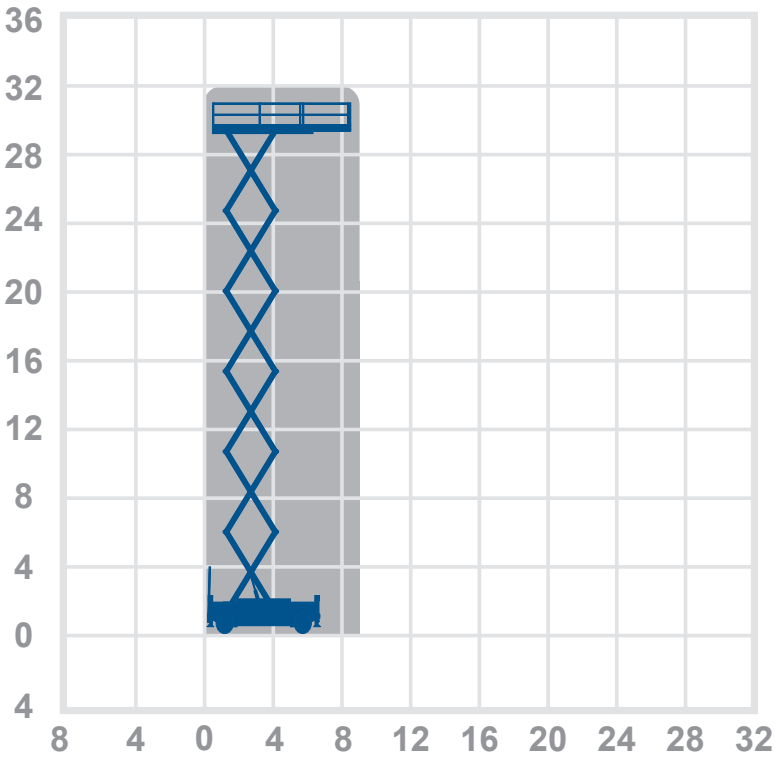

32.0m

Standard features

Optional features

0345 745 0000
nationwideplatforms.co.uk

LOXAM
Nationwide Platforms

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

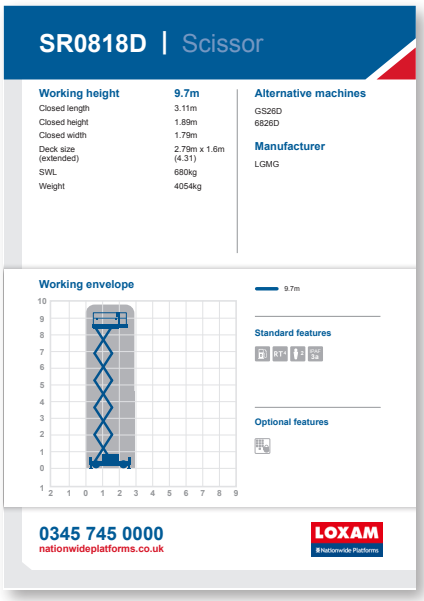

Height and outreach

Working height — Horizontal outreach

Standard features

- Battery power
- Diesel power
- Lithium battery
- Hybrid power
- Duel fuel option
- Gas power option
- Rough terrain *(2 wheel drive)*
- Rough terrain *(4 wheel drive)*
- IPAF licence type 1a
- IPAF licence type 1b
- IPAF licence type 3a
- IPAF licence type 3b
- IPAF licence type PAV
- Tracked
- Mast boom
- Articulating boom
- Straight telescopic boom
- Non-marking tyres
- Outrigger legs
- Maximum people in cage*
- Push around vehicles
- Operator powered
- Indoor use only
- Indoor/Outdoor
- Self drive
- JIB rotation
- Driving licence type
- Power to platform
- Generator
- Oil free operation
- 110v Inverter

Optional extras

- SkySiren® †
- SkySiren® PCS
- SkySentry®
- SkyRak®
- SkyRakPlus®
- SkyRakBoom®
- SkyRakMulti™
- SkyTel™
- SkyRakEdge™
- SkyShield™
- SkyScreen™
- Material handling attachments
- Generator
- Power to platform
- Camera pod
- Circular camera cage
- Wendy lighting frame
- Bucket
- Fork Extention
- Fork Lifting Hook

* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.