

# VI12E | Van Mounted

<b>Working height</b>	<b>13.8m</b>
<b>Outreach</b>	<b>8.4m</b>
Closed length	7.0m
Closed height rails up / Fixed rails	3.6m
Closed width	2.45m
Deck size	1.2m x 0.7m
SWL	230kg
Weight	3500kg
Full operational width	2.45m
Minimum operational width	2.45m
Overall spare payload (Vans)	395kg


## Alternative machines

VT12E  
VR13KL

## Manufacturer

Versalift

## Working envelope

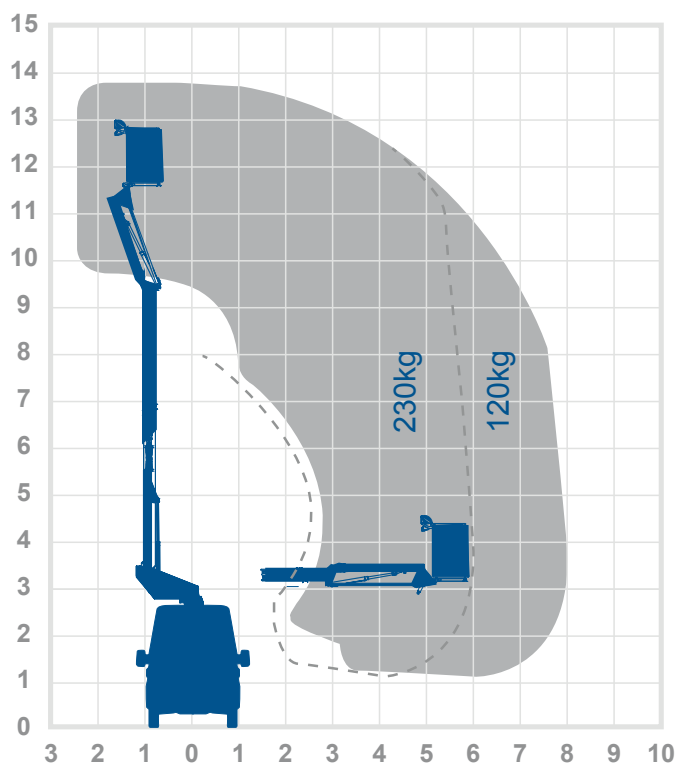

13.8m  
8.4m

## Standard features



## Optional features



**0345 745 0000**  
[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide  
Platforms**  
A **LOXAM** Company

# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**


## Height and outreach


Working height  Horizontal outreach 


### KL38 | Van Mounted

<b>Working height</b>	13.8m	<b>Alternative machines</b>
<b>Outreach</b>	8.0m	VT12E VT125K
Closed length	6.51m	<b>Manufacturer</b>
Closed height rails up / Fixed rails	3.3m	Klubb
Closed width	2.2m	
Deck size	1.1m x 0.6m	
SWL	200kg	
Weight	3500kg	
Full operational width	2.5m	
Minimum operational width	2.5m	
Overall spare payload (Vans)	200kg	

**Working envelope**



Standard features: 

Optional features: 

**0345 745 0000**  
nationwideplatforms.co.uk

**Nationwide Platforms**  
A LOXAM Company

## Standard features

- |                               |                   |                          |                      |
|-------------------------------|-------------------|--------------------------|----------------------|
| Battery power                 | IPAF licence type | Straight telescopic boom | Self drive           |
| Diesel power                  | IPAF licence type | Non-marking tyres        | JIB rotation         |
| Lithium battery               | IPAF licence type | Outrigger legs           | Driving licence type |
| Hybrid power                  | IPAF licence type | Maximum people in cage*  | Power to platform    |
| Dual fuel option              | IPAF licence type | Push around vehicles     | Generator            |
| Gas power option              | Tracked           | Operator powered         |                      |
| Rough terrain (2 wheel drive) | Mast boom         | Indoor use only          |                      |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor           |                      |

## Optional extras

- |               |              |                               |                      |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® †   | SkyRakBoom®  | SkyScreen™                    | Circular camera cage |
| SkySiren® PCS | SkyRakMulti™ | Material handling attachments | Wendy lighting frame |
| SkySentry®    | SkyTel™      | Generator                     | Bucket               |
| SkyRak®       | SkyRakEdge™  | Power to platform             | Fork Extension       |
| SkyRakPlus®   | SkyShield™   | Camera pod                    | Fork Lifting Hook    |

\* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.