

2825RT | Scissor Lift

Working height

28.0m


Closed length	5.96m
Closed height	4.13m
Stowed height (guardrails lowered)	3.19m
Closed width	2.50m
Platform size	5.48m x 2.45m
Platform length (deck extended)	7.58m
Max SWL	1000kg
Weight	19800kg

Alternative machines

Manufacturer

Dingli

Working envelope

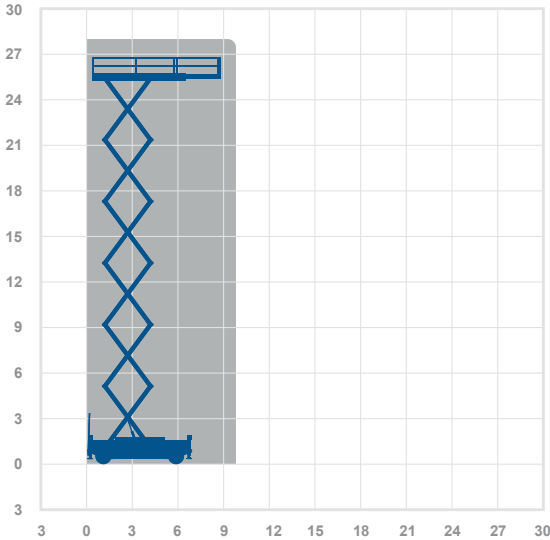

28.0m

Standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**


Height and outreach


Working height  Horizontal outreach 


AMWP11.5-8100 | Boom Lift

Working height	11.2m	Alternative machines
Horizontal outreach	3m	Star10
Closed length	2.55m	Star10A
Closed width	1m	Manufacturer
Rotation	340°	Driftl
Platform height	0.2m	
Max SIRE	200kg	
Weight	2050kg	
Deck size	0.62m x 0.67m	

Working envelope
































Standard features 

Optional extras 

















0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
A LINCOLN Company

Standard features

- | | | |
|---|---|--|
| <ul style="list-style-type: none">  Battery power  Diesel power  Lithium battery  Hybrid power  Dual fuel option  Gas power option  Rough terrain (2 wheel drive)  Rough terrain (4 wheel drive) | <ul style="list-style-type: none">  IPAF licence type  IPAF licence type  IPAF licence type  IPAF licence type  IPAF licence type  Tracked  Mast boom  Articulating boom | <ul style="list-style-type: none">  Straight telescopic boom  Non-marking tyres  Outrigger legs  Maximum people in cage*  Push around vehicles  Operator powered  Indoor use only  Indoor/Outdoor |
| | | <ul style="list-style-type: none">  Self drive  J1B rotation  IPAF driving licence type  Power to platform  Generator |

Optional extras

- | | | |
|---|---|--|
| <ul style="list-style-type: none">  SkySiren®  SkySiren® PCS  SkySentry®  SkyRak® | <ul style="list-style-type: none">  SkyRakPlus®  SkyRakBoom®  SkyRakMulti™  SkyTel™ | <ul style="list-style-type: none">  SkyRakEdge™  SkyShield™  SkyScreen™  Material handling attachments |
| | | <ul style="list-style-type: none">  Generator  Camera pod  Circular camera cage  Wendy lighting frame |

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.