

VM14GS | Van Mounted

Working height	13.75m
Outreach	7.8m
Closed length	7.2m
Closed height rails up / Fixed rails	3.45m
Closed width	2.2m
Deck size	1.0m x 0.6m
SWL	250kg
Weight	5000kg
Full operational width	2.25m
Minimum operational width	2.25m
Overall spare payload (Vans)	900kg


Alternative machines

V14E

Manufacturer

GSR

Working envelope

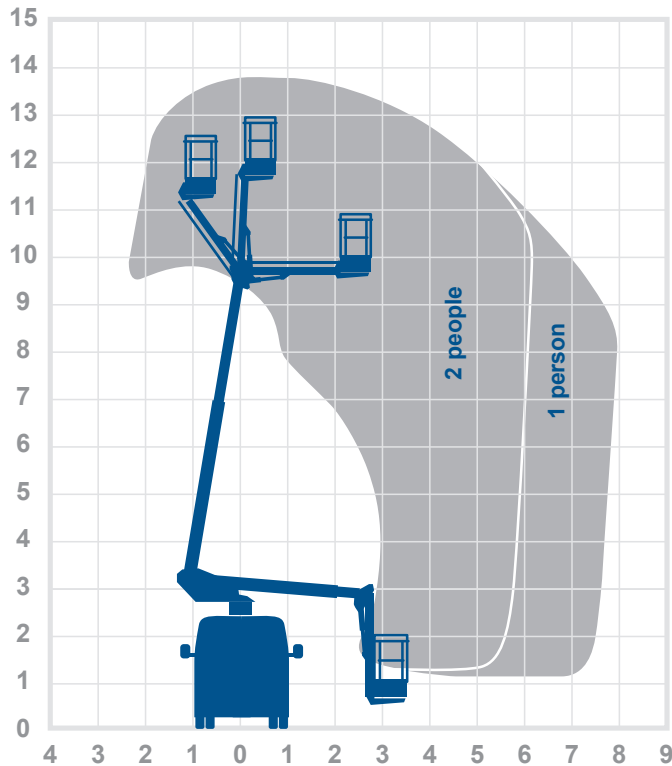

13.75m
7.8m

Standard features



Optional features



0345 745 0000
nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Height and outreach

Working height Horizontal outreach

KL38 | Van Mounted

Working height	13.8m	Alternative machines
Outreach	8.0m	VT12E VT125K
Closed length	6.51m	Manufacturer
Closed height rails up / Fixed rails	3.3m	Klubb
Closed width	2.2m	
Deck size	1.1m x 0.6m	
SWL	200kg	
Weight	3500kg	
Full operational width	2.5m	
Minimum operational width	2.5m	
Overall spare payload (Vans)	200kg	

Working envelope

Standard features

Optional features

0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
A LOXAM Company

Standard features

- | | | | |
|-------------------------------|-------------------|--------------------------|----------------------|
| Battery power | IPAF licence type | Straight telescopic boom | Self drive |
| Diesel power | IPAF licence type | Non-marking tyres | JIB rotation |
| Lithium battery | IPAF licence type | Outrigger legs | Driving licence type |
| Hybrid power | IPAF licence type | Maximum people in cage* | Power to platform |
| Dual fuel option | IPAF licence type | Push around vehicles | Generator |
| Gas power option | Tracked | Operator powered | |
| Rough terrain (2 wheel drive) | Mast boom | Indoor use only | |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor | |

Optional extras

- | | | | |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® † | SkyRakBoom® | SkyScreen™ | Circular camera cage |
| SkySiren® PCS | SkyRakMulti™ | Material handling attachments | Wendy lighting frame |
| SkySentry® | SkyTel™ | Generator | Bucket |
| SkyRak® | SkyRakEdge™ | Power to platform | Fork Extension |
| SkyRakPlus® | SkyShield™ | Camera pod | Fork Lifting Hook |

* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.