

SJ3219 | Scissor Lift

Working height

7.8m

Closed length	1.55m
Closed height	2.13m
Stowed height (guardrails down)	1.78m
Closed width	0.81m
Platform size	0.66m x 1.55m
Platform length (deck extended)	2.46m
Max SWL	227kg
Weight	1476kg


Alternative machines

GS1932
OPT8
3219

Manufacturer

Skyjack

Working envelope

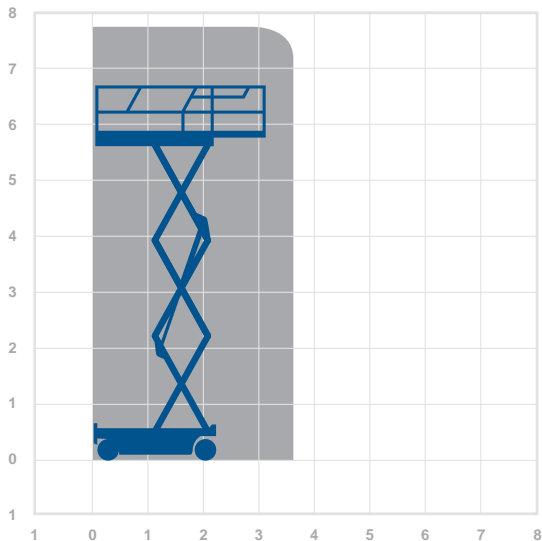

7.8m

Standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk


**Nationwide
Platforms**
A **LOXAM** Company

AMWP11.5-8100 | Boom Lift

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Working height



Horizontal outreach



AMWP11.5-8100 | Boom Lift

Working height	11.2m	Alternative machines
Horizontal outreach	3m	Star10
Closed length	2.55m	Star10A
Closed height	1.90m	Manufacturer
Closed width	1m	Drift
Rotation	345°	
Platform height	0.2m	
Max SWL	200kg	
Weight	2000kg	
Deck size	0.62m x 0.875m	

Working envelope

Standard features
Optional extras

0345 745 0000
nationwideplatforms.co.uk

Features

- Battery power
- Diesel power
- Lithium battery
- Hybrid power
- Dual fuel option
- Gas power option
- Rough terrain (2 wheel drive)
- Rough terrain (4 wheel drive)
- IPAF licence type
- IPAF licence type
- IPAF licence type
- IPAF licence type
- IPAF licence type
- Tracked
- Mast boom
- Articulating boom
- Straight telescopic boom
- 1R tyres
- Outrigger legs
- Maximum people in cage*
- Push around vehicles
- Operator powered
- Indoor use only
- Indoor/Outdoor
- Self drive
- J1B rotation
- IPAF driving licence type
- Power to platform
- Generator

Options

- SkySiren®
- SkySiren® PCS
- SkySentry®
- SkyRak®
- SkyRakPlus®
- SkyRakBoom®
- SkyRakMulti™
- SkyTel™
- SkyRakEdge™
- SkyShield™
- SkyScreen™
- Material handling attachments
- Generator
- Camera pod
- Circular camera cage
- Wendy lighting frame

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the PD06FWHFLFDWLRQBHTXSPHOMUKGHVFKGEHJHIGWRSRWRSDODFLQRIGCHURHSRLELWFDHDFHFSWHGLQKHMCWBWWWKGRFRHWFQDLEBBLRQGDWDBWLGLIHHQIBPWBLQKPDDFWVHFLFDWLRQBHTXSPHOMUKGHV