

0807PA | Scissor

Working height

7.8m

Closed length	1.86m
Closed height	2.15m
Closed height (guardrails lowered)	1.83m
Closed width	0.76m
Platform size (extended)	1.67m x 0.74m (2.57m x 0.74m)
SWL	230kg
Weight	1650kg


Alternative machines

N/A

Manufacturer

Dingli

Working envelope

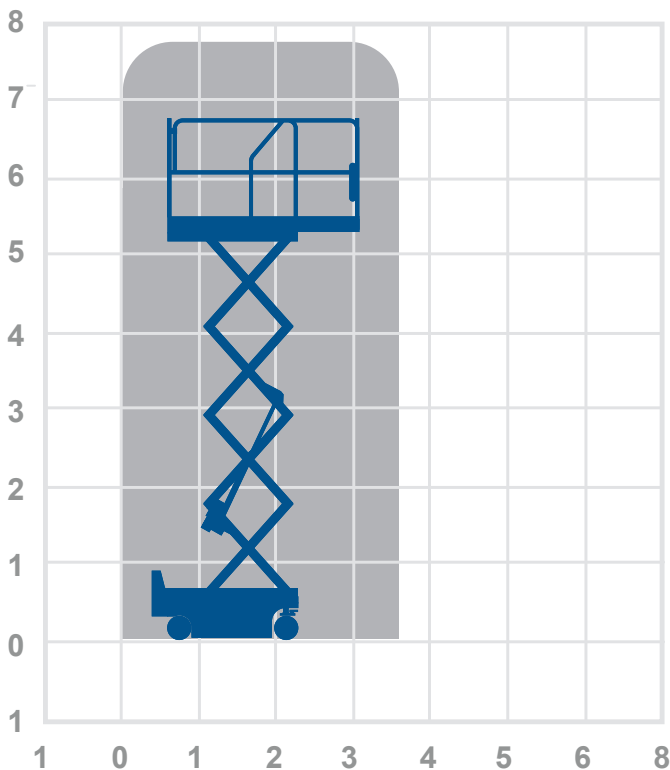

7.8m

Standard features



Fitted with OEM secondary guarding

Optional features



0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**


Height and outreach





Working height  Horizontal outreach 


SR0818D | Scissor

Working height	9.7m	Alternative machines
Closed length	3.11m	GS26D
Closed height	1.83m	6S26D
Closed width	1.79m	Manufacturer
Deck size (extended)	2.79m x 1.6m	LGMG
SWL	880kg	
Weight	4054kg	

Working envelope
































Standard features:    

Optional features: 





















0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
A LOXAM Company

Standard features

- | | | | |
|---|---|--|--|
|  Battery power |  IPAF 1a licence type |  Straight telescopic boom |  Self drive |
|  Diesel power |  IPAF 1b licence type |  Non-marking tyres |  JIB rotation |
|  Lithium battery |  IPAF 3a licence type |  Outrigger legs |  Driving licence type |
|  Hybrid power |  IPAF 3b licence type |  Maximum people in cage* |  Power to platform |
|  Dual fuel option |  IPAF PAV licence type |  Push around vehicles |  Generator |
|  Gas power option |  Tracked |  Operator powered | |
|  Rough terrain (2 wheel drive) |  Mast boom |  Indoor use only | |
|  Rough terrain (4 wheel drive) |  Articulating boom |  Indoor/Outdoor | |

Optional extras

- | | | | |
|---|--|---|--|
|  SkySiren® † |  SkyRakBoom® |  SkyScreen™ |  Circular camera cage |
|  SkySiren® PCS |  SkyRakMulti™ |  Material handling attachments |  Wendy lighting frame |
|  SkySentry® |  SkyTel™ |  Generator |  Bucket |
|  SkyRak® |  SkyRakEdge™ |  Power to platform |  Fork Extension |
|  SkyRakPlus® |  SkyShield™ |  Camera pod |  Fork Lifting Hook |

* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.