

# POPUP | Low Level

## Working height

**5.0m**

Closed length	1.31m
Closed height	1.75m
Closed width	0.76m
Platform size	1.04m x 0.52m
Max SWL	240kg
Weight	394kg


## Alternative machines

Powertower

## Manufacturer

POPUP

## Working envelope

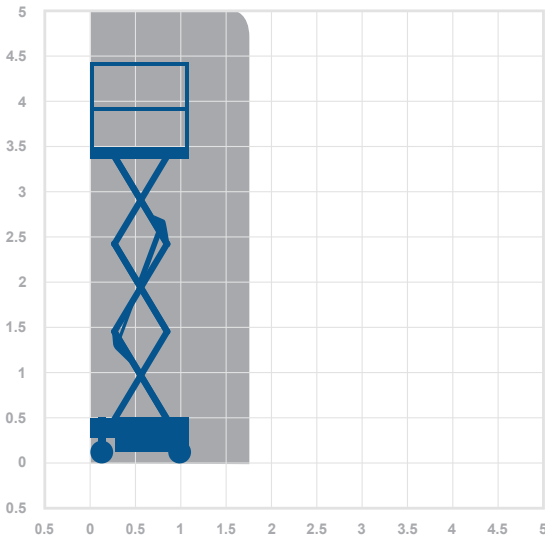

5.0m

## Standard features



## Optional extras

**0345 745 0000**

[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide  
Platforms**  
A **LOXAM** Company

# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

## Height and outreach

Working height Horizontal outreach

**AMWP11.5-8100** | Boom Lift

<table style="width: 100%; border-collapse: collapse;"> <tr><td>Working height</td><td style="text-align: right;"><b>11.2m</b></td></tr> <tr><td>Horizontal outreach</td><td style="text-align: right;"><b>3m</b></td></tr> <tr><td>Closed length</td><td style="text-align: right;">2.55m</td></tr> <tr><td>Closed height</td><td style="text-align: right;">1.90m</td></tr> <tr><td>Closed width</td><td style="text-align: right;">1m</td></tr> <tr><td>Rotation</td><td style="text-align: right;">345°</td></tr> <tr><td>Platform height</td><td style="text-align: right;">0.2m</td></tr> <tr><td>Max SWL</td><td style="text-align: right;">200kg</td></tr> <tr><td>Weight</td><td style="text-align: right;">2000kg</td></tr> <tr><td>Deck size</td><td style="text-align: right;">0.62m x 0.870m</td></tr> </table>	Working height	<b>11.2m</b>	Horizontal outreach	<b>3m</b>	Closed length	2.55m	Closed height	1.90m	Closed width	1m	Rotation	345°	Platform height	0.2m	Max SWL	200kg	Weight	2000kg	Deck size	0.62m x 0.870m	<p><b>Alternative machines</b></p> <p>Star 10 Star 10A</p> <p><b>Manufacturer</b></p> <p>Driftl</p>
Working height	<b>11.2m</b>																				
Horizontal outreach	<b>3m</b>																				
Closed length	2.55m																				
Closed height	1.90m																				
Closed width	1m																				
Rotation	345°																				
Platform height	0.2m																				
Max SWL	200kg																				
Weight	2000kg																				
Deck size	0.62m x 0.870m																				

**Working envelope**

**Standard features**

- Battery power
- Diesel power
- Lithium battery
- Hybrid power
- Dual fuel option
- Gas power option
- Rough terrain (2 wheel drive)
- Rough terrain (4 wheel drive)

**Optional extras**

- Generator
- Camera pod
- Circular camera cage
- Wendy lighting frame

**0345 745 0000**  
[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide Platforms**  
A SBA Group Company

## Standard features

- |  |  |   |  |
|--|--|---|--|
| <ul style="list-style-type: none"> <li> Battery power</li> <li> Diesel power</li> <li> Lithium battery</li> <li> Hybrid power</li> <li> Dual fuel option</li> <li> Gas power option</li> <li> Rough terrain (2 wheel drive)</li> <li> Rough terrain (4 wheel drive)</li> </ul> | <ul style="list-style-type: none"> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> IPAF licence type</li> <li> Tracked</li> <li> Mast boom</li> <li> Articulating boom</li> </ul> | <ul style="list-style-type: none"> <li> Straight telescopic boom</li> <li> Non-marking tyres</li> <li> Outrigger legs</li> <li> Maximum people in cage*</li> <li> Push around vehicles</li> <li> Operator powered</li> <li> Indoor use only</li> <li> Indoor/Outdoor</li> </ul> | <ul style="list-style-type: none"> <li> Self drive</li> <li> J1B rotation</li> <li> IPAF driving licence type</li> <li> Power to platform</li> <li> Generator</li> </ul> |
|--|--|---|--|

## Optional extras

- |   |   |  |   |
|---|---|--|---|
| <ul style="list-style-type: none"> <li> SkySiren®</li> <li> SkySiren® PCS</li> <li> SkySentry®</li> <li> SkyRak®</li> </ul> | <ul style="list-style-type: none"> <li> SkyRakPlus®</li> <li> SkyRakBoom®</li> <li> SkyRakMulti™</li> <li> SkyTel™</li> </ul> | <ul style="list-style-type: none"> <li> SkyRakEdge™</li> <li> SkyShield™</li> <li> SkyScreen™</li> <li> Material handling attachments</li> </ul> | <ul style="list-style-type: none"> <li> Generator</li> <li> Camera pod</li> <li> Circular camera cage</li> <li> Wendy lighting frame</li> </ul> |
|---|---|--|---|

\*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.