

1008PA | Scissor

Working height	10.0m
Closed length	2.48m
Closed height	2.36m
Closed height (guardrails lowered)	2.0m
Closed width	0.83m
Platform size (extended)	2.27m x 0.81m (3.17m x 0.81m)
SWL	230kg
Weight	2410kg


Alternative machines

N/A

Manufacturer

Dingli

Working envelope

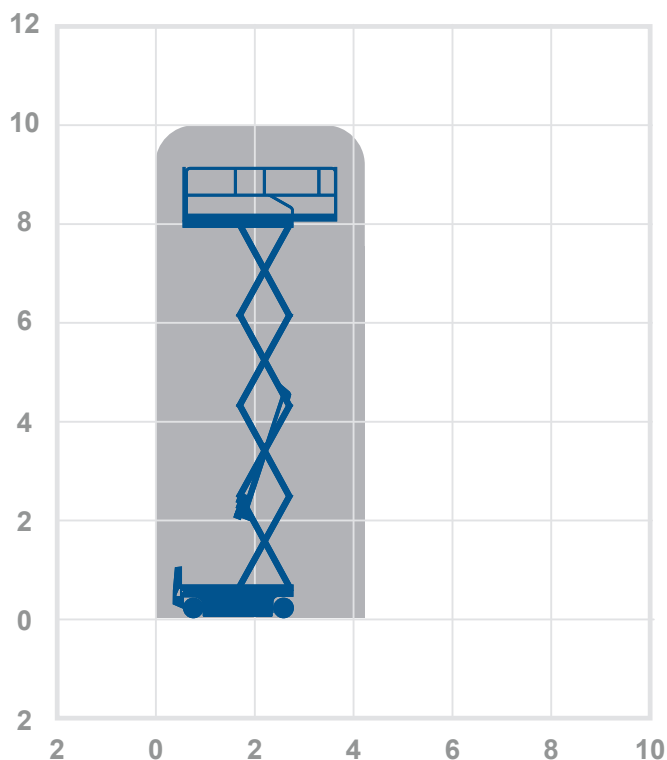

10.0m

Standard features



Fitted with OEM secondary guarding

Optional features



0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Height and outreach

Working height Horizontal outreach

SR0818D
Scissor

Working height	9.7m	Alternative machines
Closed length	3.11m	GS26D
Closed height	1.83m	6826D
Closed width	1.79m	Manufacturer
Deck size (extended)	2.79m x 1.6m (4.31)	LGMG
SWL	880kg	
Weight	4054kg	

Working envelope 9.7m

Standard features

-

Optional features

-

0345 745 0000
nationwideplatforms.co.uk
Nationwide Platforms
A LOXAM Company

Standard features

- | | | | |
|-------------------------------|-------------------|--------------------------|----------------------|
| Battery power | IPAF licence type | Straight telescopic boom | Self drive |
| Diesel power | IPAF licence type | Non-marking tyres | JIB rotation |
| Lithium battery | IPAF licence type | Outrigger legs | Driving licence type |
| Hybrid power | IPAF licence type | Maximum people in cage* | Power to platform |
| Dual fuel option | IPAF licence type | Push around vehicles | Generator |
| Gas power option | Tracked | Operator powered | |
| Rough terrain (2 wheel drive) | Mast boom | Indoor use only | |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor | |

Optional extras

- | | | | |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® † | SkyRakBoom® | SkyScreen™ | Circular camera cage |
| SkySiren® PCS | SkyRakMulti™ | Material handling attachments | Wendy lighting frame |
| SkySentry® | SkyTel™ | Generator | Bucket |
| SkyRak® | SkyRakEdge™ | Power to platform | Fork Extention |
| SkyRakPlus® | SkyShield™ | Camera pod | Fork Lifting Hook |

* The number refers to indoor or outdoor uses. Call us for details.

† Secondary guarding system fitted may be original manufacturers equipment.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.