

HL190E | Scissor Lift

Working height	18.8m
Closed length	3.74m
Closed height	3.40m
Stowed height (guardrails down)	2.24m
Closed width	1.20m
Platform size	3.38m x 1.16m
Platform length (deck extended)	4.88m
Max SWL	500kg
Weight	7985kg


Alternative machines

195-12
1912DC

Manufacturer

Hollandlift

Working envelope

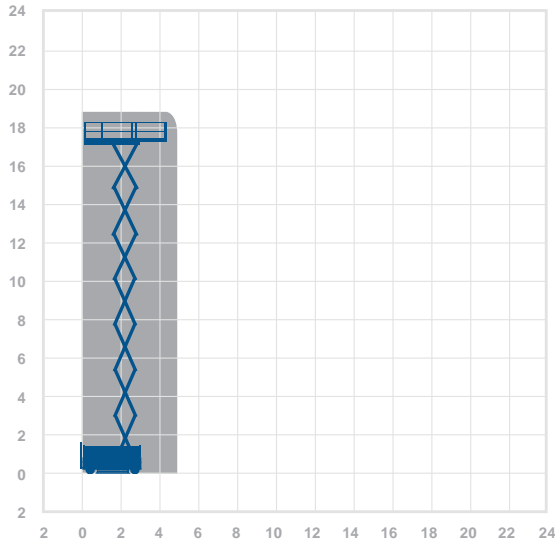

18.8m

Key standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

QHW/DQLQWKBGW SHFL£DWLRQHW

2022

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

#LJW/DQRW/HDFK

Working height Horizontal outreach

AMWP11.5-8100 | Boom Lift

Working height	11.2m	Alternative machines
Horizontal outreach	3m	Star 10
Closed length	2.53m	Star 10A
Closed height	1.96m	Manufacturer
Closed width	1m	Dejag
Rotation	340°	
Platform height	0.3m	
Max SWL	200kg	
Weight	2200kg	
Deck size	0.62m x 0.87m	

Working envelope

Standard features 11.2m 3m

Optional extras

0345 745 0000
nationwideplatforms.co.uk

WVDQDGIHDWV

- | | | | |
|-------------------------------|-------------------|--------------------------|---------------------------|
| Battery power | IPAF licence type | Straight telescopic boom | Self drive |
| Diesel power | IPAF licence type | 1R DNO tyres | J1B rotation |
| Lithium battery | IPAF licence type | Outrigger legs | IPAF driving licence type |
| Hybrid power | IPAF licence type | Maximum people in cage* | Power to platform |
| Dual fuel option | IPAF licence type | Push around vehicles | Generator |
| Gas power option | Tracked | Operator powered | |
| Rough terrain (2 wheel drive) | Mast boom | Indoor use only | |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor | |

2SWLRQOHWDV

- | | | | |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren® | SkyRakPlus® | SkyRakEdge™ | Generator |
| SkySiren® PCS | SkyRakBoom® | SkyShield™ | Camera pod |
| SkySentry® | SkyRakMulti™ | SkyScreen™ | Circular camera cage |
| SkyRak® | SkyTel™ | Material handling attachments | Wendy lighting frame |

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the PD0FWM0HFL£DWLRQHWKSPH0MUKGH£FR0GEHBIHUGWRSURWRSODFLOR0CHURHSR0E0L0WFD0H0DFFHSWHL0W0HM0QW0VW0W0GRFR0H0FR0D0L0000PLR0GD0W0BWL0GLI0H0W0BP0W0L0K0PD0FWM0HFL£DWLRQHWKSPH0MUKGHV