

# VR13KL | Van Mount

## Working height

**13.8m**

## Horizontal outreach

**8.0m**

Max Horizontal outreach (full SWL)	6.55m
Overall travel length	6.52m
Overall travel height	3.30m
Overall travel width	2.20m
Platform size	1.10m x 0.60m
Max SWL	200kg
Gross vehicle weight	3500kg
Operational full width	2.50m
Minimum operational width (straight down jacking)	2.50m


## Alternative machines

V12E  
VT125K

## Manufacturer

Klubb

## Working envelope

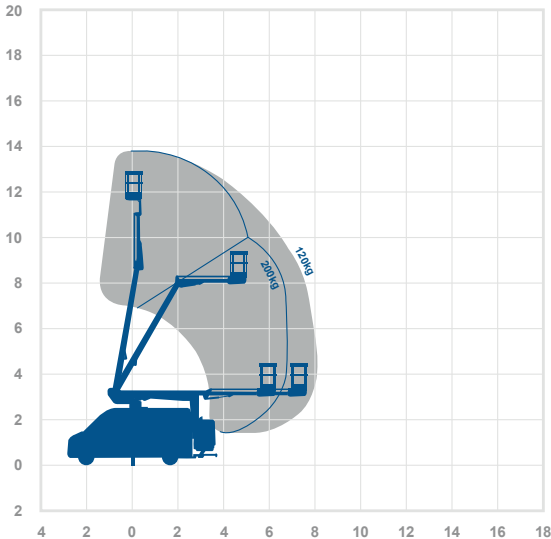

## Standard features



## Optional extras

**0345 745 0000**

[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

**Nationwide  
Platforms**  
A **LOXAM** Company

# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

## Height and outreach

Working height Horizontal outreach

**AMWP11.5-8100** | Boom Lift

<table style="width: 100%; border-collapse: collapse;"> <tr><td>Working height</td><td style="text-align: right;">11.2m</td></tr> <tr><td>Horizontal outreach</td><td style="text-align: right;">3m</td></tr> <tr><td>Closed length</td><td style="text-align: right;">2.85m</td></tr> <tr><td>Closed height</td><td style="text-align: right;">1.99m</td></tr> <tr><td>Closed width</td><td style="text-align: right;">1m</td></tr> <tr><td>Rotation</td><td style="text-align: right;">360°</td></tr> <tr><td>Platform height</td><td style="text-align: right;">0.2m</td></tr> <tr><td>Max Dll</td><td style="text-align: right;">200kg</td></tr> <tr><td>Weight</td><td style="text-align: right;">2000kg</td></tr> <tr><td>Deck size</td><td style="text-align: right;">0.62m x 0.87m</td></tr> </table>	Working height	11.2m	Horizontal outreach	3m	Closed length	2.85m	Closed height	1.99m	Closed width	1m	Rotation	360°	Platform height	0.2m	Max Dll	200kg	Weight	2000kg	Deck size	0.62m x 0.87m	<p><b>Alternative machines</b></p> <p>Star10 Star10A</p> <p><b>Manufacturer</b></p> <p>Driftl</p>
Working height	11.2m																				
Horizontal outreach	3m																				
Closed length	2.85m																				
Closed height	1.99m																				
Closed width	1m																				
Rotation	360°																				
Platform height	0.2m																				
Max Dll	200kg																				
Weight	2000kg																				
Deck size	0.62m x 0.87m																				

**Working envelope**

0 2 4 6 8 10 12
0 2 4 6 8 10 12

**Standard features**

**Optional extras**

**0345 745 0000**  
nationwideplatforms.co.uk
**Nationwide Platforms**  
A LINCOLN Company

## Standard features

- |                               |                   |                          |                           |
|-------------------------------|-------------------|--------------------------|---------------------------|
| Battery power                 | IPAF licence type | Straight telescopic boom | Self drive                |
| Diesel power                  | IPAF licence type | Non-marking tyres        | J1B rotation              |
| Lithium battery               | IPAF licence type | Outrigger legs           | IPAF driving licence type |
| Hybrid power                  | IPAF licence type | Maximum people in cage*  | Power to platform         |
| Dual fuel option              | IPAF licence type | Push around vehicles     | Generator                 |
| Gas power option              | Tracked           | Operator powered         |                           |
| Rough terrain (2 wheel drive) | Mast boom         | Indoor use only          |                           |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor           |                           |

## Optional extras

- |               |              |                               |                      |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren®     | SkyRakPlus®  | SkyRakEdge™                   | Generator            |
| SkySiren® PCS | SkyRakBoom®  | SkyShield™                    | Camera pod           |
| SkySentry®    | SkyRakMulti™ | SkyScreen™                    | Circular camera cage |
| SkyRak®       | SkyTel™      | Material handling attachments | Wendy lighting frame |

\*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.