


Welcome to our powered access selection guide. Inside you'll find all the information you need to begin working safely and effectively at height.

To get you started we've included comprehensive guidance on our leading product range, as well as advice on the accessories, innovations and training that'll help you succeed on your next task or project.

Remember, if you want to get in touch with us at any point whilst you're browsing, you can give us a call with any enquiries, feedback or hire requests.



How to navigate through this document

Use these navigation buttons to jump straight to the product range where you'll find the products in ascending height order.



If you can't find exactly what you're looking for or need more information, call our expertly trained staff. **LOW LEVEL**

SCISSORS

BOOMS

VANS

TRUCK MOUNTED

TRACKED BOOMS

TELE-HADLERS

SAFETY, ATTACHMENTS, ACCESSORIES

Contents

Use this guide to find your perfect powered access solution.

Each section in this guide has been created to allow you to browse, select and order your ideal machine, attachments and accessories.

Information

Introduction	1
How to use this guide	4
Equipment Selection	5
Location	6
Safety	7
Stay connected	8
iPAF Rental+	8
Regulations	9
Training	10
Indemnity	11
Service & Hire Options	11
Equipment Sales	12

Product Specification

Low Level Access	13
Scissor Lifts	21
Boom Lifts	51
Van Mounted	82
Truck Mounted	85
Tracked Boom Lifts	102
Telehandlers	110
Safety Solutions, Attachments & Accessories	121
Useful Data	
Weight Conversion	130
Distance Conversion	130


How to use this guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height.

The working envelope and height/reach indicator will provide a guick visual reference to assist your equipment selection

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on 0345 745 0000



Working

height

Horizontal

outreach

Product Code

Unique reference number for product. (Please note this will not necessarily correspond with the original manufacturer's model number or product code)

Specification

These details include product dimensions. Safe Working Load (SWL), platform area, rotation and machine weight.

3 Kev

These symbols indicate standard features and optional extras available to hire with the platform. See right for key table.

Working Envelope

This shows the area of working space provided by the product.

Product Type

Indicates classification of powered access unit e.g. machine types: low level access. scissor lift, boom lift, truck or van mounted platform, specialist boom or telehandler.

6 Alternative Machines

Indicates alternative or similar machines.

7 Working Height

The blue column indicates the safe operating vertical height.

Horizontal Outreach

The grey column indicates the safe operating outreach

Kev

Standard features



IPAF Diesel power

Lithium battery

Hybrid power Dual fuel

option Gas power

Rough terrain (2 wheel drive)

Rough terrain (4 wheel drive)

> Non-marking tyres

licence type

licence type licence type

licence type

licence type Tracked

Mast boom

Articulating

Outrigger legs

Maximum

people in cage* Push around vehicles

Operator

powered

use only

Self drive

JIB rotation

IPAF driving licence type









Equipment Selection

Considerations in selecting the right equipment for your task.

Before you get started, it's essential you make sure you have the right training to work safely and legally. Call us to learn more about our training services.

Height & Outreach

Do I need to reach a height straight up or do I need to reach up and then over?

For vertical access, scissor lifts may be best. When working over racking and shelving, mast booms are ideal. When working over obstacles, articulated booms provide a versatile solution.

Environment Will I be working indoors

> or outdoors? Use a zero emission electric machine indoors, and in general a diesel

machine outdoors. For versatility, consider a dual fuel unit

Terrain

What are the ground conditions I'll be working on?

If you're working indoors, consider non-marking tyres. On rough terrain select a four wheel drive option and select outriggers on sloping ground.

To help you find the ideal machine for your next job: visit our website and use our New to Platforms **Selector** or call us on 0345 745 0000

Access

Are there any access restrictions to entering the working environment?

Indoors, will machines pass through doorways and lift shafts? Does the site have plant weight restrictions?

Working height

How far up and how far out do I need to reach?

Always check the working envelope diagrams to ensure the outreach required can be achieved at the height(s) you need to carry out your task. Also consider that maximum working heights are assumed as 2m above the platform height (feet level).

Hire duration

How long do I need a machine for?

Self drive and other vehicle mounted platforms may suit short projects. We offer machine hires from one day to many years, as well as equipment for outright purchase.



Location

Supporting you at every height

With a fleet of more than 15,500 platforms available to hire across the UK, you can be sure that your perfect solution is never too far away.



SCOTLAND & NORTH EAST

ABERDEEN

Cairnrobin Pipeyard Portlethen Aberdeen AB12 4SB

DUNDEE

6 Faraday Street Dryburgh Industrial Estate, Dundee DD2 300

GLASGOW Customer

Service Centre

Tel. 0345 600 1490

Unit B East Point 13 Melford Road Righead Ind Estate Bellshill Glasgow ML4 3LR

GLASGOW CITY

45 Methil Street Glasgow G14 0AG

EDINBURGH

Unit 6D Uphall Business Park Loaning Hill, Broxburn West Lothian EH52 5NT

MIDLANDS & THE NORTH

BARNSLEY

Unit 3 The Recovery Centre Wakefield Rd Barnsley S71 1NU

BIRMINGHAM Customer

Service Centre

Tel. 0345 600 1492

Willenhall Road Darlaston Wednesbury West Midlands WS10 8JG

BLACKBURN

New Trees Garage Myerscough Road Mellor Brook, Blackburn BB2 7LB

DURHAM

Customer Service Centre Tel. 0345 600 1496

Damson Way Dragon Ville Industrial Estate Durham DH1 2YN

LEEDS

Tel. 0345 600 1491

Old Run Road Unit 1, Blackburn Works, Hunslet Leeds LS10 2AA

LEICESTER

Unit 10–11 Arkwright Hill Farm Lutterworth Road (A426) Nr Cosby, LE9 1RH

LIVERPOOL

Knowsley Industrial Estate, Yardley Road Kirkby, Liverpool L33 7SS

NORTH WALES

Castle Close Hawarden Industrial Park, Hawarden, Deeside CH5 3QZ

NOTTINGHAM

Unit 21 Hazelford Way Newstead NG15 0DQ

SCUNTHORPE

7 Atkinson Way Foxhill Industrial Estate, Scunthorpe, DN15 8QJ

STOCKTON ON TEES

1 Hurricane Court Stockton-on-Tees TS18 3TL





Location Safety

WARRINGTON

Customer Service Centre

Tel. 0345 600 1491

Unit D, Appleton Industrial Park Barleycastle Lane Appleton Thorn Warrington WA4 4OT

WELLINGBOROUGH

Sidegate Lane Wellingborough Northants NN8 1RN

SOUTH WEST & SOUTH WALES

AVONMOUTH

Victoria Road Avonmouth Bristol BS11 9DB

DIDCOT

Hawksworth Industrial Estate Didcot, Oxfordshire OX11 7HR

BRISTOL Customer Service Centre Tel. 0345 600 1494

Cumberland House Ashton Gate Marsh Road, Bristol BS3 2NA

CARDIFF

Tel. 0345 600 1494

Castle Works
East Moors Road
Cardiff
CF24 5NN

LISKEARD

Customer Service Centre Tel. 0345 600 1495

Moorswater Industrial Estate, Liskeard Cornwall PL14 4LB

SWANSEA

Unit 8 RVB Park Carnffrwdd Way Enterprise Park Swansea SA6 8QD

SOUTHAMPTON

Claylands Road Industrial Estate Bishops Waltham SO32 1BH

TAUNTON

Venture Way Priorswood Industrial Estate, Taunton Somerset TA2 8DE

SOUTH EAST

BRENTWOOD

Childerditch Industrial Park Childerditch Hall Drive, Brentwood CM13 3HD

KENT

Plot 1, Thameside Terminal, Cliffe Nr Rochester Kent ME3 7SU

LONDON EAST

Customer Service Centre Tel. 0345 600 1493

6 Oliver Road West Thurrock Essex RM20 3ED

LONDON WEST

West London Industrial Park Iver Lane, Cowley, Uxbridge UB8 2JG

LUTON

Customer Service Centre

Tel. 01582 578074

Unit 12 Dencora Way Sundon Park Ind Estate, Luton, LU3 3HP

NORWICH

Rookery Farm Silver Street, Besthorpe Norwich NR17 2LD

Your safety, our priority.

At Nationwide Platforms, safety is always our number one priority.

That's why every single step we take to serve you has been designed with your welfare and wellbeing in mind.

We'd like to invite you to join our safety journey and see why you can always trust our products and services to provide the safeguard you need.



For all the latest news, promotions, guidance and more, why not check out our social media channels?



Like us on Facebook.com/NationwidePlatforms



Watch our latest videos on YouTube.com/NationwidePlatforms



IPAF Rental+ provides assurance to customers at every stage of the MEWP hire/rental process.

Known in the industry as the independent quality mark for powered access hire companies, IPAF Rental+ is awarded to those who meet the most stringent standards of training, advice, equipment and customer satisfaction set by a committee of the most experienced players in the powered access rental business.

The Gold standard means
Nationwide Platforms has
displayed exemplary standards
recognised by IPAF as a
company who provides significant
investment to go above and
beyond the minimum standard.



Nationwide Platforms has been awarded with Gold IPAF Rental+



THE HIGHEST
STANDARD IN
POWERED ACCESS
EQUIPMENT HIRE

Regulations

Knowing your requirements

If you're working at height, it's important to understand the legislation and regulations which apply to you.

The Work at Height Regulations (2005) apply to all work at height where there is a risk of a fall liable to cause personal injury. These regulations are a key starting point for anyone responsible for individuals completing, supervising or planning work at height.

elevating work platforms



To help you work efficiently and safely at height Nationwide Platforms has a range of in depth guidance notes to aid understanding and implementation of best practice in the work place.

These useful and informative guides are available on request.





Training



Training Courses

With more IPAF instructors, training centres and experience in delivering courses than anyone else, you can rely on us to get you trained and ready to work safely on your next project.

Our IPAF Operator courses are available to complete at training centres across the UK and can even be held on your own site.

IPAF Operator Courses













Training

Our complete range of training courses are ideal for anyone looking for advanced or specialist training.

Our additional range of training for powered access users includes:

IPAF MEWPs for Managers

The essential one day course for individuals managing, supervising or planning work at height



We also offer a complete range of courses accredited and approved by:















Indemnity

Service & Hire Options

PowerGuard

All our machines and equipment is hired out under the Construction Plant Hire Association Model Conditions for hiring of plant (July 2011). These terms and conditions place the responsibility on the hirer for any loss or damage of the equipment hired.

With the cost of loss and damage potentially running into thousands of pounds, PowerGuard offers a peace of mind indemnity to our hire customers.

Two levels of PowerGuard are available: **Gold** (damage only) and **Platinum** (damage and loss).*

Protect yourself against costs of machine damage or loss



Whatever you're looking to achieve, we're proud to offer you a range of flexible hire & maintenance options.

Long term hire

In addition to our daily, weekly and monthly hire options, we can also offer long term agreements ideal for ongoing maintenance tasks and large projects.

Suitable for:

- · Warehouse and logistics applications
- Long term maintenance and refurbishment projects
- Day to day facilities management tasks in retail, office, commercial and arena settings

Technical & maintenance services

In addition to providing adaptable maintenance packages for short and long term hires, we can also offer you technical support in managing your own fleet requirements.

For professional advice & guidance in selecting the most suitable solution for your needs contact us today

For more information on the advantages of our PowerGuard scheme or to add PowerGuard to your account, contact us on **0345 745 0000**.




Equipment Sales

The UK's widest selection of new and used access platforms is available to buy now from Nationwide Platforms.

Whether you're seeking a unit from our leading fleet or looking for a brand new model direct from the manufacturer, we have the resources, expertise and know-how to find your perfect solution. We are also refurbishing units out of the fleet.

What's more, we also offer a range of finance and servicing packages.







0808 100 3604 nationwideplatforms.co.uk





Low Level Access



0345 745 0000 nationwideplatforms.co.uk

- More than 1,000 units available to hire across the UK
- Working heights up to 9.5m
- Lightweight models from 180kg
- Non-marking tyres for use on finished floors

Machine type by product code

Pecolift	SJ12
NANO	GR15
NANO SP	SJ16
NANO SP+	GR20
LEONARDO HD	GP20
POWER TOWER	GP25
GR12	





A LOXAM Company

Pecolift

low level



Working Height 3.5m

Closed Length 0.98m Closed Height 1.55m 0.75m Closed Width

0.72m x 0.60m Platform Size

Max SWL 150kg Weight 180kg **Alternative** machines NANO

Manufacturer **POWER TOWERS**

Indoor use only
















0345 745 0000 nationwideplatforms.co.uk



We're also pleased to offer wind rated Pecolift models designed for use outdoors. Contact us today to learn more.

NANO SP

Alternative

NANO SP+

machines

Working Height 4.5m

Closed Length 1.195m
Closed Height 1.56m
Closed Width 0.75m
Platform Size 1.0m x 0.73m

Max SWL 200kg

Weight 285kg

Alternative machines Nano SP

Manufacturer

POWER TOWERS

Indoor use only


















0345 745 0000 nationwideplatforms.co.uk

Working Height 4.5m

Closed Length 1.2m
Closed Height 1.59m
Closed Width 0.75m

Closed Width 0.75m
Platform Size 1.0m x 0

Platform Length

– deck extended

Max SWL Weight 0.75m Manufacturer
1.0m x 0.73m POWER TOWERS

NANO










1.5m

200kg

506kg





low level

LEONARDO HD

low level

Working Height 4.5m

 Closed Length
 1.2m

 Closed Height
 1.59m

 Closed Width
 0.75m

 Platform Size
 1.0m x 0.73m

Platform Length 2.0m

deck extended

Max SWL 200kg Weight 540kg Alternative machines NANO NANO SP

Manufacturer

Manufacturer
POWER TOWERS

Working Height 4.9m

Closed Length 1.04m
Closed Height 1.75m
Closed Width 0.76m

Platform Size 1.04m x 0.63m

1.7m

Platform Length

– deck extended

Max SWL 180kg

Weight 555kg Weight (with Solo-Gyps) 500kg Manufacturer
Bravi Platforms


Compatible with Solo Gyps attachment

Batt


















Working Height 5.1m

Closed Length 1.6m
Closed Height 1.92m
Closed Width 0.78m

Platform Size 1.52m x 0.65m


Max SWL 250kg Weight 342kg Alternative machines

NANO NANO SP

Manufacturer

POWER TOWERS

Indoor use only



0345 745 0000 nationwideplatforms.co.uk

Working Height 5.58m

Closed Length 1.35m Closed Height 1.79m

Closed Width 0.76m

Platform Size 0.89m x 0.75m Platform Length 1.35m

- deck extended

Max SWL 227kg Weight 862kg Alternative machines

NANO SP GR15

Manufacturer Genie

Indoor use only




















Working Height 5.65m

1.78m Closed Length Closed Height 1.79m 0.77m Closed Width

Platform Size 0.93m x 0.69m

227kg Max SWL Weight 863kg **Alternative** machines GR12 **GR15**

Manufacturer

Skyjack














0345 745 0000 nationwideplatforms.co.uk

Working Height 6.62m

Closed Length 1.45m Closed Height 1.79m

0.76m Closed Width Platform Size 0.94m x 0.75m

Platform Length deck extended

Max SWI

227kg Weight 994kg

Alternative machines

GR20 GR12 NANO SP

Manufacturer

Genie

Indoor use only












1.4m







low level

low level

Working Height 6.75m

Closed Length 1.37m
Closed Height 1.79m
Closed Width 0.77m

Platform Size 0.69m x 0.85m

Max SWI 227kg

Max SWL 227kg Weight 980kg Alternative machines

GR15 GR20 1230ES

Manufacturer

Skyjack

Indoor use only




















0345 745 0000 nationwideplatforms.co.uk

Working Height 7.85m

Closed Length 1.35m Closed Height 1.98m

Closed Width 0.8m
Platform Size 0.89m x 0.75m

Platform Length

deck extended

GR20

Max SWL 159kg Weight 1264kg Alternative machines

GR15 GS20 3219

Manufacturer

Genie

Indoor use only












1.4m







low level

GP25

Working Height 8.12m

Closed Length 1.27m Closed Height 1.98m Closed Width 0.74m

Platform Size 1.14m x 0.66m

159kg Max SWL Weight 347kg

Alternative machines GP25

Manufacturer

Genie

Indoor use only

Working Height 9.54m

Closed Length 1.31m Closed Height 1.98m Closed Width 0.74m

Platform Size 1.14m x 0.66m

159kg Max SWL Weight 330kg Alternative machines GP20

Manufacturer Genie

Indoor use only


















You can find the latest promotions, competitions and news from Nationwide Platforms by following us on our social media pages.


















Scissors



- More than 7,200 units available to hire across the UK
- Working heights from 7m to 34m
- Lightweight and compact machines
- Direct drive electric machines for greater efficiency
- Double deck and rough terrain

- · Variety of power options
- Narrow aisle machines for access to confined areas
- Non-marking tyre option for work on finished floors
- Models with 1,134kg SWL
- Lightweight models from 1,269kg
- · Power to platform available

Machine type by product code

GS1532	GS2632	COM12DX	GS53
SJ3215	COM10N	GS4047	GS53G
OPT8	CO10	COM14	165-12
3219	COM10DX	M4069	195-12
GS1932	6832D	S142-12	HL220H
GS20	4632	9241	HL220D
3220	GS32	8841	S225-24
COM8	GS3232	GS43	SL210
GS26	GS32D-O	GS43G	HL235D
GS2669RT	GS3369RT	S152-12	M250
4626	COM12	9250X	HL275H
6826D	GS33	LL15N	S280-25
GS26D-O	GS3390RT	S175-12	LL26X
3226	GS3390G	H18SX	HL340D



SJ3215

scissors

Working Height 6.4m

Closed Length 1.83m
Closed Height 2.03m
Stowed Height 1.73m

(guardrails lowered)
Closed Width

Platform Size 1.63m x 0.74m

Platform Length 2.54m

(deck extended)

Max SWL 272kg Weight 1269kg

Alternative machines

3215 3219 GS1932

Manufacturer

Genie

Working Height 6.57m

Closed Length 1.55m
Closed Height 2.03m
Stowed Height 1.67m

(guardrails lowered)

Closed Width 0.81m

Platform Size 1.55m x 0.66m Platform Length 2.46m

Platform Length (deck extended)

Max SWL 272kg Weight 1148kg Alternative machines
GS1532

Manufacturer

SkyJack

- + Batt






















0.81m





0345 745 0000 nationwideplatforms.co.uk





6.57 m

0.79m

scissors

3219 scissors

0.81m

227kg

Working Height 7.77m

Closed Length 1.9m Closed Height 1.98m Stowed Height 1.98m (quardrails lowered)

Closed Width

Platform Size 0.74m x 1.72m Platform Length 2 59m

(deck extended)

Max SWL 230kg Weight 1520g Alternative machines

3220 GS1932 GS20

Manufacturer

Haulotte

Working Height 7.8m

1.78m Closed Length Closed Height 2.11m Stowed Height 1.64m

(quardrails lowered)

Closed Width

Platform Size 1 63m x 0 71m 2.53m

Platform Length (deck extended)

Max SWL

Weight 1312kg Alternative machines

GS1932 GS20

Manufacturer


SkyJack


































GS20

scissors

Working Height 7.8m

Closed Length 1.82m Closed Height 2.11m Stowed Height 1.76m (quardrails lowered)

Closed Width 0.81m

Platform Size 1 64m x 0 74m 2 54m

Platform Length (deck extended)

Max SWL 227kg Weight 1503kg **Alternative** machines

3219 GS20 3220

Manufacturer

Genie

Working Height 7.92m

2.45m Closed Length Closed Height 2.1m Stowed Height 1.75m

(quardrails lowered)

Closed Width 0.81m

Platform Size 2 21m x 0 7m Platform Length 3.2m

(deck extended)

Max SWL 363kg Weight 1559kg Alternative machines 3220 COM8

Manufacturer Genie






























Envelope Working





COM8

scissors

Working Height 8.1m

Closed Length 2.32m Closed Height 2.08m Stowed Height 1.73m

(quardrails lowered) Closed Width

Platform Size 2 13m x 0 71m

Platform Length (deck extended)

Max SWL 408kg Weight 1594kg **Alternative** machines

GS20 2030ES

Manufacturer

SkyJack












0.81m

3 04m









Working Height 8.2m

Closed Length 2.49m Closed Height 2.0m Stowed Height 1.13m

(quardrails lowered)

Closed Width

Platform Size 0.81m x 2.31m Platform Length 3.23m

(deck extended)

Max SWL 350kg Weight 1655kg Alternative machines

GS26 GS2632 3226

Manufacturer

Haulotte












0.81m







GS2669RT

scissors

Working Height 9.75m

Closed Length 2.45m Closed Height 2.17m Stowed Height 1.99m (quardrails lowered)

Closed Width 1 17m

Platform Size 2 21m x 0 94m 3 2m

Platform Length (deck extended)

Max SWL 454kg Weight 2107kg **Alternative** machines

4626

Manufacturer

Genie

Working Height 9.9m

Closed Length 3.12m Closed Height 2.59m Stowed Height 1.92m

(quardrails lowered)

Closed Width 1 75m

Platform Size Platform Length 4.5m

(deck extended)

Max SWL 680kg Alternative machines


GS26D-O 6826D

Genie

Manufacturer

2 79m x 1 6m

Weight 3768kg


















Working Height 9.9m

Closed Length 2.31m
Closed Height 2.15m
Stowed Height 1.79m
(guardrails lowered)

Closed Width 1.17m

Platform Size 2.11m x 1.07m Platform Length 3.01m


(deck extended)

Max SWL 454kg Weight 2130kg Alternative machines

GS26

Manufacturer SkyJack

it 🚳 👣 1-2



0345 745 0000 nationwideplatforms.co.uk

Working Height 9.92m

Closed Length 3.12m
Closed Height 2.37m
Stowed Height 1.61m

(guardrails lowered)

Closed Width

Platform Size 2.44m x 1.42m Platform Length 3.94m

Platform Length (deck extended)

Max SWL 567kg Weight 3305kg Alternative machines

GS26D GS26D-O

Manufacturer SkyJack












1 72m









3226

scissors

Working Height 9.92m

Closed Length 2.67m
Closed Height 2.35m
Stowed Height 1.7m
(guardrails lowered)

Closed Width 1.73m

Platform Size 2.51m x 1.55m

Platform Length

 (deck extended)
 3.96m

 Max SWL
 567kg

 Weight
 3455kg

Alternative machines

GS26D 6826D

Manufacturer

Genie

Working Height 9.92m

Closed Length 2.32m Closed Height 2.15m Stowed Height 1.91m

(guardrails lowered)

Closed Width 0.81m

Platform Size 2.13m x 0.71m Platform Length 3.23m

Platform Length (deck extended)

Max SWL 227kg Weight 1890kg Alternative machines

GS2632

Manufacturer SkyJack

Indoor use only
























COM₁₀N

scissors

Alternative

Manufacturer

machines

GS2632

Haulotte

3226

Working Height 9.92m

Closed Length 2 44m Closed Height 2.26m Stowed Height 1.91m

(quardrails lowered)

Closed Width 0.81m Platform Size 2.26m x 0.79m

Platform Length (deck extended)

Max SWL 227kg Weight 1956ka Alternative machines

3226 2630

Manufacturer

Genie

Indoor use only










3 18m









Working Height 10.0m

Closed Length Closed Height 2.18m Stowed Height

(quardrails lowered)

Closed Width

Platform Size

Platform Length (deck extended)

Max SWL

Weight

2 49m

1.32m

0.81m

0.81m x 2.31m 3.23m

230kg

2190ka

Indoor use only





14














12 Envelope 10 6 Working 0 2 0 10





COM10DX

scissors

Working Height 10.15m

Closed Length 2.31m
Closed Height 2.14m
Stowed Height 1.28m
(quardrails lowered)

Closed Width 1.2m

Platform Size 2.31m x 1.2m Platform Length 3.23m

(deck extended)

Max SWL 450kg Weight 2330kg Alternative machines

GS2632 3226 COM10N

Manufacturer

Haulotte

Working Height 10.3m

Closed Length 3.17m
Closed Height 2.44m
Stowed Height 1.59m

(guardrails lowered)

Closed Width

Platform Size 2.45m x 1.45m Platform Length 3.7m

Platform Length (deck extended)

Max SWL 565kg Weight 3520kg Alternative machines

GS26D 6826D

Manufacturer

Haulotte

- + Batt

























1 78m







11.75m **Working Height**

Closed Length 3.12m Closed Height 2.51m Stowed Height 1.75m (quardrails lowered)

Closed Width

Platform Size 2.44m x 1.42m

Platform Length (deck extended)

Max SWL

454kg Weight 3655kg **Alternative** machines

GS32D GS32D-O

Manufacturer

SkyJack










1 72m

3 94m







Working Height 11.75m

2.31m Closed Length Closed Height 2.24m Stowed Height 1.88m

(quardrails lowered)

Closed Width

Platform Size 2 11m x 1 07m

Platform Length (deck extended)

Max SWL Weight

1 17m

3 01m

317kg 2300kg **Alternative** machines

GS32 3246

Manufacturer

SkyJack
























GS3232

scissors

Working Height 11.75m

Closed Length 2.43m
Closed Height 2.3m
Stowed Height 1.8m
(guardrails lowered)

Closed Width 1.17m

Platform Size 2.26m x 1.16m

3 25m

Platform Length (deck extended)

Max SWL 318kg Weight 2796kg Alternative machines

4632 3246

Manufacturer

Genie

Working Height 11.75m

Closed Length 2.44m
Closed Height 2.44m
Stowed Height 2.03m

(guardrails lowered)

Closed Width 0.81m

Platform Size 2.26m x 0.81m Platform Length 3.33m

Platform Length (deck extended)

Max SWL 227kg Weight 2352kg Alternative machines
GS32

Manufacturer

Genie

Indoor use only





















Morking Enveloped Part of the state of the s







11.8m **Working Height**

Closed Length 2.67m Closed Height 2.45m

Stowed Height (guardrails lowered)

Closed Width 1.73m

Platform Size 2 51m x 1 55m

Platform Length (deck extended)

Max SWL 454kg Weight 4115kg Alternative machines 6832D

Manufacturer Genie












1.83m

3.96m









COM12

scissors

Working Height 11.96m

Closed Length 3.12m Closed Height 2.59m Stowed Height 1.92m

(quardrails lowered) Closed Width

Platform Size 2 79m x 1 6m

Platform Length

(deck extended) 4.5m 454kg Max SWL Weight 3949ka Alternative machines 6832D Manufacturer

Genie










1 75m







Working Height 12.0m

Closed Length 2.49m Closed Height 2.39m Stowed Height 1.53m

(quardrails lowered)

Closed Width

Platform Size 1.2m x 2.31m 3.23m

Platform Length (deck extended)

300kg Max SWL Weight 2470g Alternative machines

GS32 4632

Manufacturer

Haulotte












1 2m











GS3390RT

scissors

Working Height 12.06m

Closed Length 4.88m
Closed Height 2.68m
Stowed Height 2.0m

(guardrails lowered)
Closed Width

Platform Size 3.89m x 1.83m

Platform Length (deck extended)

Max SWL 1134kg Weight 7520kg Alternative machines

GS3390RT GS43 6832D GS3369RT

Manufacturer

Genie

Working Height 12.06m

Closed Length 4.88m
Closed Height 2.71m
Stowed Height 2.03m

(guardrails lowered)

Closed Width 2.29m

Platform Size 4.81m x 1.83m Platform Length 7.38m

(deck extended)

Max SWL 1134kg Weight 6890kg Alternative machines

GS33 GS43 6832D GS3369RT


Manufacturer

Genie



2 13m

6 57m



Morking Envelope

10

12

12

0

0

2

0

2

0

2

0

14

16

² ² ⁺ ⁺



One day of powered access training, years of working safely at height. Call today and get trained with Nationwide Platforms. Call: 0345 745 0000



12.06m

COM12DX

scissors

Working Height 12.06m

Closed Length 4.88m Closed Height 2.71m Stowed Height 2.03m (quardrails lowered)

Closed Width 2 29m

Platform Size 4.81m x 1.83m 7 38m

Platform Length (deck extended)

Max SWL 1134kg Weight 6826ka **Alternative** machines

GS43G GS53G

Manufacturer

Genie






















Working Height 12.06m

3.17m Closed Length Closed Height 2.56m Stowed Height 1.7m

(quardrails lowered)

Closed Width

Platform Size 1.78m x 2.45m

Platform Length (deck extended)

Max SWL Weight

3 7m

1 78m

450kg 4110kg **Alternative** machines

GS3369RT GS32D-O

Manufacturer Haulotte


























COM14

scissors

Working Height 13.7m

Closed Length Closed Height Stowed Height

(quardrails lowered)

Closed Width Platform Size

Platform Length (deck extended)

Max SWL

350kg Weight 3221kg

Alternative machines

COM14 S142-12 S152-12

Manufacturer

Genie

Indoor use only











2.26m x 1.15m

2 44m

2.54m


1 88m

1 19m

3 36m







Working Height 13.8m

2 74m Closed Length Closed Height 2.5m Stowed Height 2.08m

(quardrails lowered)

Closed Width

Platform Size 2.3m x 1.2m Platform Length 3 22m

(deck extended)

Max SWL 350kg Weight 3175ka Alternative machines

LL15N S142-12 S152-12

Manufacturer

Haulotte

Indoor use only












1 2m











S142-12

scissors

Working Height 14.19m

Closed Length 3.1m
Closed Height 2.83m
Stowed Height 2.01m
(quardrails lowered)

Closed Width

Platform Size 2.92m x 1.65m Platform Length 3.83m

1 75m

Platform Length (deck extended)

Max SWL 360kg Weight 5700kg Alternative machines

4069 4069-O

Manufacturer

JLG

14 16

Working Height 14.2m

Closed Length 2.71m
Closed Height 2.76m
Stowed Height 1.98m

(guardrails lowered)

Closed Width 1.2m

Platform Size 2.5m x 1.2m Platform Length 3.7m

(deck extended)

Max SWL 350kg Weight 3400kg Alternative machines

S152-12 COM14 GS4047

Manufacturer

HAB

Indoor use only




















8841

scissors

Working Height 14.5m

Closed Length 4.5m Closed Height 2.8m Stowed Height 2.0m (quardrails lowered)

Closed Width 2 3m

Platform Size 4.30m x 1.90m

Platform Length 7 2m (deck extended)

Max SWL

681kg Weight 6715kg **Alternative** machines

8841 **GS43**

Manufacturer

SkyJack


















Working Height 14.5m

Closed Length 3.49m Closed Height 2.9m Stowed Height 2.22m

(quardrails lowered)

Closed Width

Platform Size 3 51m x 1 76m 4.71m

Platform Length (deck extended)

Max SWL 680kg Weight 5289kg Alternative machines

9241 **GS43**

Manufacturer SkyJack












2 21m













GS43G

scissors

Working Height 15.1m

Closed Length 4.88m Closed Height 2.93m Stowed Height 2.25m (quardrails lowered)

Closed Width 2 29m Platform Size 4.81m x 1.83m

Platform Length 7 38m

(deck extended)

Max SWL 680kg Weight 7323kg **Alternative** machines

8841 9241 GS53

Manufacturer

Genie

Working Height 15.1m

Closed Length 4.88m Closed Height 2.93m Stowed Height 2.25m

(quardrails lowered)

Closed Width 2 29m

Platform Size 4.81m x 1.83m

Platform Length


(deck extended)


Max SWL 680kg Weight 7323kg Alternative machines GS53G

Manufacturer

Genie

7 38m







9250X

scissors

Working Height 15.2m

Closed Length Closed Height Stowed Height

(quardrails lowered) Closed Width

Platform Size 3 04m x 1 18m 4 24m

Platform Length (deck extended)

Max SWL 500kg Weight 4700kg **Alternative** machines

LL15N GS4047 COM14 S142-12

Manufacturer

HAR

Indoor use only











3.35m


3.0m

2.25m

1 19m







Working Height 17.2m

4.47m Closed Length Closed Height 3.16m Stowed Height 2.29m

(quardrails lowered)

Closed Width

Platform Size 4 27m x 1 88m 7 2m

Platform Length (deck extended)

Max SWL 681kg Weight 7395ka **Alternative** machines 9250X-O

Manufacturer SkyJack













2 34m















S175-12

scissors

Working Height 17.3m

Closed Length Closed Height Stowed Height (quardrails lowered)

Closed Width 1 22m Platform Size 3.9m x 1.2m

4.12m

3.3m

2.55m

5 4m

Platform Length (deck extended)

Max SWL 500kg Weight 7600ka **Alternative** machines

S152-12 S175-12 165-12 LL17E

Manufacturer

Liftlux

Indoor use only




















Working Height 17.5m

Closed Length Closed Height Stowed Height (quardrails lowered)

Closed Width

Platform Size 3 04m x 1 18m 4 25m

Platform Length (deck extended)

Max SWL Weight

500kg 5350ka Alternative machines

LL15N S175-12 165-12

Manufacturer

HAR

Indoor use only












3.34m

3.15m

2.38m

1 19m









GS53

scissors

Working Height 18.0m

Closed Length 5.3m Closed Height 2.99m Stowed Height 2.11m (quardrails lowered)

Closed Width 2 25m

Platform Size 1.89m x 5.3m

Platform Length 7.3m (deck extended)

Max SWL 500kg Weight 7360g

Alternative machines

Manufacturer

GS53

Haulotte


















0345 745 0000 nationwideplatforms.co.uk

Working Height 18.15m

4.88m Closed Length Closed Height 3.15m Stowed Height 2.47m

(quardrails lowered)

Closed Width 2 29m

Platform Size 4.81m x 1.83m Platform Length 7 38m

(deck extended)


Max SWL 680kg Weight 8050ka **Alternative** machines

LL20X 9250X 9250

Manufacturer

Genie







165-12

scissors

Working Height 18.2m

3.98m Closed Length Closed Height 3.15m Stowed Height 2.47m (quardrails lowered)

Closed Width 2 29m

Platform Size 4 81m x 1 83m

Platform Length (deck extended)

Max SWL 680kg Weight 9541ka **Alternative** machines GS43G Manufacturer

Genie












7 38m







0345 745 0000 nationwideplatforms.co.uk

Working Height 18.5m

Closed Length 3.74m Closed Height 3.4m Stowed Height 2.65m (quardrails lowered)

Closed Width

Platform Size 3 38m x 1 16m Platform Length 4 88m

(deck extended)

Max SWL 500kg Weight 7985ka Alternative machines

LL15N S175-12 180-12 LL15N

Manufacturer

Holland Lift

Indoor use only












1 2m













Working Height 21.4m

Closed Length 3.74m Closed Height 3.74m Stowed Height 3.01m

(guardrails lowered)

Closed Width 1.20m

Platform Size 3 38m x 1 16m 4.88m

Platform Length (deck extended)

Max SWL 500kg Weight 9120kg **Alternative** machines SL180N

Manufacturer Holland Lift

Indoor use only






















HL220D

scissors

Working Height 21.7m

Closed Length Closed Height Stowed Height (quardrails lowered)

Closed Width Platform Size

Platform Length (deck extended)

Max SWL 750kg 13900g Weight

Alternative machines

HL220D HL235D S225 LL20X

SL210 SI 245

Manufacturer

Holland Lift









4.84m

3.65m

2.88m

2 44m

7.0m


2.30m x 4.50m











Working Height 21.9m

Closed Length 4 84m Closed Height 3.65m Stowed Height 2.88m

(quardrails lowered)

Closed Width

Platform Size 4 50m X 2 30m Platform Length 7 0m

(deck extended)

Max SWL Weight 12140ka Alternative machines


LL20X LL26X HI 235D SL210

Manufacturer Holland Lift

750kg



2.44m







SL210

scissors

Working Height 22.5m

Closed Length Closed Height Stowed Height

(quardrails lowered)

Closed Width Platform Size

Platform Length (deck extended)

Max SWL

750kg រុក្ខ Weight 11000kg **Alternative** machines

LL20X LL26X HI 220D HL235D

Manufacturer

HAB

Working Height 23.0m

Closed Length Closed Height Stowed Height

(quardrails lowered)

Closed Width

Platform Size 5 35m x 2 50m 7 55m

Platform Length (deck extended)

Max SWL Weight

1000kg 15000kg **Alternative** machines

LL20X HL220D HL235D S225-24

Manufacturer

Liftlux









4.84m

3.72m

2.88m

2 39m


7 2m

4 5m x 2 36m















5.75m

4.1m


3.2m

2 5m















M250

scissors

Working Height 23.2m

Closed Length Closed Height Stowed Height (quardrails lowered)

Closed Width 2 49m

Platform Size 5 22m x 2 40m Platform Length 7 32m

(deck extended)

Max SWL 1000kg Max SV 18100kg **Alternative** machines

LL20X S225-24 SI 210 HL220D

Manufacturer

Holland Lift











5.75m

4.01m

3.1m














Working Height 27.0m

Closed Length 6.57m Closed Height 3.89m Stowed Height 3.13m

(quardrails lowered)

Closed Width 2 65m

Platform Size 6 15m x 2 5m Platform Length 8 25m


(deck extended)

Max SWL 1000kg Weight 21910kg **Alternative** machines

LL26X SL245

Manufacturer Holland Lift

RT4 1 4 1 1









S280-25

scissors

Working Height 27.2m

Closed Length 6.57m Closed Height 3.89m Stowed Height 3.13m (quardrails lowered)

Closed Width

Platform Size 2 35m x 6 15m Platform Length 8 25m

(deck extended)


Max SWL 1000kg Weight 25100kg **Alternative** machines

M250 LL26X S280

Manufacturer

Holland Lift

2.5m



28.0m **Working Height**

Closed Length 5.96m Closed Height 4.1m Stowed Height 3.4m

(quardrails lowered)

Closed Width

Platform Size 5 48m x 2 44m 7 57m

2.5m

750kg

18000kg

Platform Length (deck extended)

Max SWL Weight


Alternative machines

LL26X

Manufacturer

HAB











HL340D

scissors

Working Height 28.3m

Closed Length 7.15m Closed Height 4.2m Stowed Height 3.1m (guardrails lowered)

Closed Width Platform Size

Platform Length (deck extended)

Max SWL 1000kg Weight 25000kg **Alternative** machines

M250 SL245 S280-25

Manufacturer

Liftlux

Working Height 33.5m

7.02m Closed Length Closed Height 3.63m Stowed Height 2.87m (quardrails lowered)

Closed Width

2 98m Platform Size 6 66m x 2 80m

Platform Length (deck extended)

Max SWL

1000kg Weight 31350kg

Alternative machines S280-25 1126X

Manufacturer Holland Lift










9 66m









2.5m

9 8m

6.7m x 2.5m

32 30 28 26 Envelope 24 20 18 16 Working 12 14 16 18 20 22 24 26 28 30 32





Boom Lifts



- More than 6,100 units available to hire across the UK
- Working heights from 10m to 56m
- · Variety of power options
- · Narrow aisle machines
- Telescopic or articulating action
- · Rough terrain tyre option
- Non-marking tyres for use on finished floors

Machine type by product code		
Star10	Z45BJ	Z80
Star10A	Z45EJ	HA260PX
Z30N	HA16PX	80JX
G30N	HA16RTJ	G85X
30JP	Z4525DJX	S85
HA12CJ	SJ46AJ	HR28H
Z33E	HR17H	860SJ
HR12NBS	TITAN60	HA32PX
G34N	Z60FE	1200SJP
G34DX	60AJX	1250AJP
40NJ	G60X	S125
HA15IP	HA20RTJPRO	HA41RTJPRO
HR15NBS	HA20PX	Z135
HR15NH	HR21H	ZX135
Z45DJX	HR21D	SX135HC
45MJ	Z62	1350SJP
S45X	S65X	SX150
45JSX	66JX	1500AJP
Z45DJXC	HT23RTJ	SX180



Star10 A

booms

Working Height 10.0m **Horizontal** 3.0m **Outreach**

Closed Length 2.62m Closed Height 1.99m Closed Width 1.0m Platform Size 0.9m x 0.7m Rotation 360°

Max SWL 200kg Weight 2760ka **Alternative** machines

Star10 A

Manufacturer

Haulotte

Working Height 10.0m Horizontal 3.0m Outreach

Closed Length 2.7m 1.99m Closed Height Closed Width 1.0m Platform Size 0.98m x 0.78

Rotation 345° Max SWL 200kg

Weight 2677ka Alternative machines

Star10

Manufacturer

Haulotte

fitted with manufacturers secondary guarding as standard









































Working Height 10.89m Horizontal 6.25m Outreach

Closed Length 5.31m Closed Height 2.0m Closed Width 1.19m

1.17m x 0.76m Platform Size 355° Rotation

Max SWL 227kg Weight 6450kg

Alternative machines

30JP 30J 40NJ G30N

Manufacturer

Genie


























oms 30JP

booms

Working Height 11.0m Horizontal 6.4m Outreach

Closed Length 5.2m
Closed Height 2.0m
Closed Width 1.2m
Platform Size 1.17m x 0.76m

Rotation 355° Max SWL 227kg Weight 6577kg Alternative machines

30JP Z30N

Manufacturer

Genie

Working Height 11.14m Horizontal 6.25m Outreach

Closed Length 5.59m
Closed Height 2.0m
Closed Width 1.22m


Platform Size 1.22m x 0.76m Rotation 140°


Rotation 140° Max SWL 227kg Weight 6849kg Alternative machines

G30N Z30N 30J

Manufacturer

JLG





 $0345\ 745\ 0000$ nationwideplatforms.co.uk



10 12 14 16

Z33E

booms

Working Height 11.68m Horizontal 6.94m **Outreach**

5.36m Closed Length 1.99m Closed Height 1.2m Closed Width

1.14m x 0.80m Platform Size 355° Rotation

250kg Max SWL 7065ka Weight

Alternative machines

G30N Z30N 30.JP

Manufacturer

Haulotte

Working Height 12.0m Horizontal 5.57m Outreach

Closed Length 4.17m 1.98m Closed Height Closed Width 1.5m


Platform Size 1.16m x 0.76m

400° Rotation Max SWL 200kg Weight 3665ka **Alternative** machines

HR12NB HR12NBS

Manufacturer

Genie
























G34N

booms

Working Height 12.2m Horizontal 6.1m **Outreach**

Closed Length 4 1m 1.9m Closed Height Closed Width 1.5m Platform Size 1.10m x 0.65m

Rotation 360° Max SWL 200kg Weight 3435ka Alternative machines

40N.J HR15NB HR12NB

Manufacturer

Niftvlift

fitted with manufacturers secondary guarding as standard

Working Height 12.52m Horizontal 6.78m Outreach

Closed Length 5.72m 2.0m Closed Height Closed Width 1.47m

Platform Size 1.42m x 0.76m 355° Rotation

Max SWL 227kg Weight 5171ka **Alternative** machines

HR12NB Z33 G34F HR12NB

Manufacturer

Genie


















16 14 Envelope Working

0345 745 0000 nationwideplatforms.co.uk





10 12 14 16 s 40NJ

booms

Working Height 12.62m Horizontal 6.78m Outreach

Closed Length 5.66m
Closed Height 2.06m
Closed Width 1.85m

 Platform Size
 1.42m x 0.76m

 Rotation
 355°

 Max SWL
 227kg

 Weight
 4929kg

Alternative machines G34D

Manufacturer Genie

Working Height 14.19m Horizontal 6.83m Outreach


Closed Length 6.71m Closed Height 1.97m Closed Width 1.5m

Platform Size 1.22m x 0.76m

Rotation 360° Max SWL 230kg Weight 6759kg Alternative machines HR15NB Z45BJ

Manufacturer

JLG



Morking Envelope

16

14

9do 10

10

10

10

11

10

11

11

10

11

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

0345 745 0000 nationwideplatforms.co.uk



10 12 14 16

HR15NBS

booms

Working Height 14.87m Horizontal 8.65m Outreach

Closed Length 6.65m
Closed Height 2.1m
Closed Width 1.52m
Platform Size 1.15m x 0.80m

Rotation 355° Max SWL 230kg Weight 7230kg Alternative machines HR15NBS HR15NH

Manufacturer

Haulotte

- + Batt
















Working Height 15.4m Horizontal 9.6m Outreach

 Closed Length
 6.3m

 Closed Height
 2.1m

 Closed Width
 1.5m

 Platform Size
 1.5m x 0.7m

 Rotation
 360°

 Max SWL
 225kg

Alternative machines

40NJ Z45BJ HR15NB

Manufacturer

Niftylift

fitted with manufacturers secondary guarding as standard



Weight










6680ka













Max SWL

Weight

booms

Z45DJX

booms

Working Height 15.5m Horizontal 9.7m **Outreach**

Closed Length 6.4m Closed Height 1.99m Closed Width 1.5m Platform Size 1.5m x 0.8m 360° Rotation

225kg 7250ka

Alternative machines HR15NBS

Manufacturer

Niftylift

fitted with manufacturers secondary guarding as standard

Working Height 15.69m Horizontal 7.6m Outreach

Closed Length 6.78m 2.08m Closed Height Closed Width 2.23m

Platform Size 1.82m x 0.76m 359° Rotation Max SWL 227kg


6542kg (Air) Weight 6892kg (Foam Filled) **Alternative** machines

Z45D Z45D-R 74525D.JX

Manufacturer

Genie





16 14 12 Working Envelope 10 16

RT2 A 11-2 HO U TO SHOW THE PART THE





S45X

booms

Working Height 15.72m Horizontal 7.24m **Outreach**

Closed Length 6.5m 2.01m Closed Height Closed Width 1.75m Platform Size 1.52m x 0.76m

360° Rotation Max SWL 230kg Weight 6532ka

Alternative machines HR15NBS Z45BJ 45MJP

Manufacturer

JI G

Working Height 15.72m Horizontal 11.18m Outreach

Closed Length 8.48m Closed Height 2.49m Closed Width 2 3m

Platform Size 1.83m x 0.76m Rotation Continuous Max SWL 227ka Weight 6709ka Reach Below Ground 1.5m

Manufacturer Genie

























Z45DJXC

booms

Working Height 15.72m Horizontal 7.47m Outreach

Closed Length 6.58m
Closed Height 2.27m
Closed Width 2.35m
Platform Size 1.83m x 0.76m

Rotation 355° Max SWL 230kg Weight 7484kg Alternative machines HA16SPX Z45DJX

Manufacturer

16

JI G

Working Height 15.86m Horizontal 7.55m Outreach

Closed Length 6.66m
Closed Height 2.25m
Closed Width 2.29m


Platform Size 1.83m x 0.76m Rotation 355°

Rotation 355° Max SWL 454kg Weight 6984kg Alternative machines

Z45DJX 45JSX HA16SPX

Manufacturer

Genie





10



S Z45EJ

booms

Working Height 15.94m Horizontal 7.65m Outreach

Closed Length 6.83m
Closed Height 2.0m
Closed Width 1.79m
Platform Size 1.83m x 0.76m

Rotation 355° Max SWL 227kg Weight 7620kg

0

Alternative machines
Z45EJ

Manufacturer

Genie

Working Height 15.94m Horizontal 7.65m Outreach

Closed Length 6.83m Closed Height 2.0m Closed Width 1.79m


Platform Size 1.83m x 0.76m Rotation 355°

Rotation 355° Max SWL 227kg Weight 7394kg Alternative machines

45EJ Z45E 45EJ

Manufacturer

Genie



Morking Envelope

14

16

14

12

12

12

14

16

14

16

14

16

14

16

14

16

0345 745 0000 nationwideplatforms.co.uk

10 12

14 16





Max SWL

Weight

booms

HA16RTJ

booms

Working Height 16.0m Horizontal 9.15m **Outreach**

Closed Length 6.95m 2.3m Closed Height Closed Width 2.3m Platform Size 1.8m x 0.8m Rotation 360°

machines Z4525DJX 45JSX S.146A.1

Alternative

Manufacturer

Haulotte

Working Height 16.0m Horizontal 8.3m Outreach


Closed Length 6.75m Closed Height 2.3m Closed Width 2.3m Platform Size 1.83m x 0.8m

Rotation 355° Max SWL 230kg Weight 6200ka **Alternative** machines Z4525DJX 45JSX

Manufacturer

Haulotte

S.146A.1



230kg

6950ka

A RT4 2 I IPAF 3b





Weight

booms

SJ46AJ

Horizontal

booms

Working Height 16.05m Horizontal 7.52m **Outreach**

Closed Length 6.65m 2.13m Closed Height Closed Width 2.29m

Platform Size 1.83m x 0.76m Rotation 355° Max SWL 227kg

Alternative machines Z45DJX 45JSX

Manufacturer

Genie

Outreach Closed Length 6 5m Closed Height 2.07m 2.29m Closed Width

Working Height 16.1m

7.54m

Platform Size 1.83m x 0.76m 360° Rotation

Max SWL 227kg Weight 6500kg

Alternative machines


Z4525DJX Z45DJX 45JSX 160ATJ

Manufacturer

Skyjack



6574ka



16 Envelope Working





TITAN60

booms

Working Height 17.2m Horizontal 9.4m Outreach

Closed Length 6.35m
Closed Height 2.1m
Closed Width 2.0m
Platform Size 1.8m x 0.85m

Rotation 360° Max SWL 225kg Weight 5000kg Alternative machines

HR21H

Manufacturer

Niftylift

Working Height 20.0m Horizontal 14.6m Outreach

Closed Length 7.0m
Closed Height 3.4m
Closed Width 2.6m
Width (stabilisers down) 3.7m

Platform Size 6.7m x 2.28m

Rotation 180°

Max SWL 1350kg


Weight 18000kg


Alternative machines

TITAN40

Manufacturer

MEC







60AJX

booms

Working Height 20.16m Horizontal 11.15m Outreach

Closed Length 8.15m
Closed Height 2.54m
Closed Width 2.49m

Platform Size 1.83m x 0.76m

Rotation 355° Max SWL 227kg Weight 7756kg Alternative machines

HR21H

Manufacturer

Genie

Working Height 20.29m Horizontal 12.12m Outreach

Closed Length 8.82m
Closed Height 2.56m
Closed Width 2.44m

Platform Size 1.83m x 0.91m Rotation 180°

 Rotation
 180°

 Max SWL
 227kg

 Weight
 10650kg


Alternative machines

Z62 G60X HR21D 60AJ 60AJX-P


Manufacturer

JLG





RT4 A 1 2 III IPAF 3b







HA20RTJPRO

booms

Working Height 20.39m Horizontal 11.05m **Outreach**

Closed Length 8.15m Closed Height 2.69m Closed Width 2.46m Platform Size 1.83m x 0.76m


Continuous Rotation Max SWL 227kg Weight 10,025kg (Air) 10,765kg (Foam Filled) **Alternative**

HR21D 60HJX Z62

Manufacturer

Genie

machines G60-R



Working Height 20.6m Horizontal 12.2m Outreach

Closed Length 8.8m 2.51m Closed Height Closed Width 2.42m

Platform Size 1.83m x 0.80m Rotation Continuous Max SWL 230ka Weight 9600ka


Alternative machines

G60X HA260PX HR21D

Manufacturer

Haulotte





Nationwide Platforms A **LOXAM** Company

HA20PX

Weight

booms

Working Height 20.65m Horizontal 13.5m Outreach

 Closed Length
 8.93m

 Closed Height
 2.67m

 Closed Width
 2.38m

 Platform Size
 1.8m x 0.8m

 Rotation
 360°


 Max SWL
 230kg

Alternative machines
G60X

Manufacturer

Haulotte





11710kg





HR21D

Weight

booms

Working Height 20.8m Horizontal 12.5m **Outreach**

Closed Length 5.3m 2.15m Closed Height Closed Width 2.27m Platform Size 1.80m x 0.85m

Rotation 360° Max SWL 225kg Weight 6500ka

Alternative machines

M60J HR21B

Manufacturer

Niftvlift

fitted with manufacturers secondary guarding as standard

Working Height 20.8m Horizontal 12.5m Outreach

Closed Length 5.3m 2.15m Closed Height Closed Width 2.27m

Platform Size 360° Rotation Max SWL 225kg

1.8m x 0.85m

6220ka

Alternative machines HA20PX G60X

Manufacturer Niftylift





























S S65X

booms

Working Height 20.87m Horizontal 12.47m Outreach

Closed Length 9.25m
Closed Height 2.4m
Closed Width 2.49m
Platform Size 1.83m x 0.76m

Rotation Continuous
Max SWL 227kg
Weight 10766kg

Alternative machines

G60X 60AJX

Manufacturer

Genie

Working Height 21.8m Horizontal 17.1m Outreach

Closed Length 9.5m
Closed Height 2.72m
Closed Width 2.5m

Reach Below Ground

 Platform Size
 1.83m x 0.76m

 Rotation
 Continuous

 Max SWL
 227kg


 Weight
 10102kg

Alternative machines

G65X 66JX

Manufacturer

Genie



27
24
21
21
21
22
21
24
21
21
35
36
3
3
0
3
6
9
12
15
18
21
24
27

2.71m



HT23RTJ

booms

Working Height 22.12m Horizontal 17.3m Outreach

Closed Length 10.21m
Closed Height 2.56m
Closed Width 2.43m
Platform Size 1.83m x 0.91m

Rotation 180° Max SWL 227kg Weight 13500kg Alternative machines

S65X G65 G65X

Manufacturer

JLG

Working Height 22.5m Horizontal 18.3m Outreach

Closed Length 10.4m
Closed Height 2.7m
Closed Width 2.47m


Reach Below Ground 4.0m

Alternative machines

S65X 66JX

Manufacturer

Haulotte























Working Height 25.6m Horizontal 18.29m Outreach

Closed Length 11.27m
Closed Height 3.0m
Closed Width 2.49m
Platform Size 2.44m x 0.91m

Rotation Continuous Max SWL 227kg Weight 17010kg Alternative machines

80JX

Manufacturer

Genie

Working Height 25.6m Horizontal 16.2m Outreach

Closed Length 12.0m Closed Height 2.71m Closed Width 2.4m

Platform Size 1.8m x 0.8m

 Rotation
 360°

 Max SWL
 230kg

 Weight
 15890kg

A RT⁴ 7 2 1 1PAF 3b


Alternative machines

80JX Z80

Manufacturer

Haulotte





27
24
21
20
15
12
3
0
3
0
3
0
3
6
9
12
15
18
21
24
27



Working Height 26.38m Horizontal 15.74m **Outreach**

Closed Length 11.12m Closed Height 3.0m Closed Width 2.44m

Platform Size 1.83m x 0.91m

360° Rotation Max SWL 230kg Weight 15600kg

Alternative machines

Z80

Manufacturer

JLG


















 Nationwide Plan 45 745 0000



oms S85

booms

Working Height 27.7m Horizontal 23.4m Outreach

Closed Length 12.4m
Closed Height 2.8m
Closed Width 2.4m
Platform Size 1.8m x 0.76m

Rotation Continuous
Max SWL 227kg
Weight 16500kg
Reach Below Ground 2.89m
Operational Full Width 3.07m

Alternative machines

G85 860SJ

Manufacturer

Genie

Working Height 27.9m Horizontal 23.32m Outreach

Closed Length 12.4m Closed Height 2.8m Closed Width 2.5m

Platform Size 1.83m x 0.76m
Rotation Continuous
Max SWL 227kg


Weight 17236kg Reach Below Ground 2.89m Alternative machines

860SJ G85X

Manufacturer

Genie





0345 745 0000 nationwideplatforms.co.uk



27.9m

860SJ

booms

Working Height 28.0m Horizontal 19.0m **Outreach**

Closed Length 9 28m 2.7m Closed Height Closed Width 2.49m Platform Size 2.4m x 0.9m Rotation 360°

Max SWL 280kg Weight 14700ka

Alternative machines

Z80 80J

Manufacturer

Niftvlift

fitted with manufacturers secondary guarding as standard

Working Height 28.21m Horizontal 22.86m Outreach

Closed Length 12 19m 3.05m Closed Height Closed Width 2.49m

Platform Size 2.44m x 0.91m

Rotation 360° Max SWL 227kg Weight 16511ka Reach Below Ground 3.0m

Alternative machines

G85X

Manufacturer JLG




















30 27 24 28.21m Envelope 22.86m Working





1200SJP

booms

Working Height 31.8m Horizontal 21.3m **Outreach**

Closed Length 11 16m Closed Height 2.7m Closed Width 2.5m

Platform Size 2.44(3.33)m 0.80m (extended) Continuous Rotation 250ka Max SWI

20800kg Weight 4.0m Reach Below Ground

Alternative

Manufacturer

Haulotte

machines 1250AJP

Working Height 38.73m Horizontal 22.86m Outreach

Closed Length 10.64m Closed Height 3.05m Closed Width 2.49m

Platform Size 2.44m x 0.91m Rotation Continuous Max SWL 230kg Weight 18500ka

Operational Full Width 3.81m **Alternative** machines

S125

Manufacturer

JLG
















50 45 Envelope 25 Working





S125

booms

Working Height 40.1m Horizontal 19.25m Outreach

Closed Length 11.45m
Closed Height 3.05m
Closed Width 2.49m

 Platform Size
 2.44m x 0.91m

 Rotation
 Continuous

 Max SWL
 227kg

 Weight
 19958kg

 Operational Full Width
 3.81m

Alternative machines

1350SJP Z135

Manufacturer

JLG

Working Height 40.15m Horizontal 24.38m Outreach

Closed Length 14.25m Closed Height 3.07m Closed Width 2.49m

 Platform Size
 2.44m x 0.91m

 Rotation
 Continuous

 Max SWL
 227kg

 Weight
 20248kg


Operational Full Width 3.35m

Alternative machines

1200SJP 1350SJP

Manufacturer

Genie





Z135

booms

Working Height 41.5m Horizontal 20.1m **Outreach**

Closed Length 13.1m 3.0m Closed Height Closed Width 2.53m Platform Size 2.44m x 0.91m

Rotation 360° Max SWL 230kg Weight 23900ka Reach Below Ground 1.5m

Alternative machines Z135 1250AJP

Manufacturer

Haulotte

Working Height 43.15m Horizontal 21.26m Outreach

12 93m Closed Length 3.07m Closed Height 2.46m Closed Width

2.44m x 0.91m Platform Size Continuous Rotation 272kg Max SWL 20366ka Weight

5.87m Reach Below Ground 3.94m Operational Full Width

Alternative machines

1350SJP 1250AJP 7X135 150HAX

Manufacturer

Genie





Operational Full Width








3.3m







Envelope 20 Working 20 25 30





Working Height 43.15m **Horizontal** 21.26m **Outreach**

Closed Length 12.93m Closed Height 3.09m 2.49m Closed Width 2.44m x 0.91m Platform Size

Continuous Rotation 272kg Max SWL 20502ka Weight 5.87m Reach Below Ground Operational Full Width 5.03m

Alternative machines

Z135 1350SJP 1250AJP 150HAX

Manufacturer

Genie


























Working Height 43.15m Horizontal 27.43m Outreach

19 76m Closed Length 3.05m Closed Height 2.49m Closed Width

2.44m x 0.91m Platform Size Continuous Rotation 454kg Max SWL

21747ka Weight 6.0m Reach Below Ground 3.94m Operational Full Width

Alternative machines 1350SJP

Manufacturer

Genie






















50 45 40 Envelope 450 Kg 25 Morking Working 0 5





SX150

booms

Working Height 43.3m Horizontal 24.38m **Outreach**

11.86m Closed Length 3.05m Closed Height 2.49m Closed Width 2.44m x 0.91m Platform Size

Continuous Rotation 230kg Max SWL 20400ka Weight 3.81m Operational Full Width

Alternative machines

Z135 1200SJP S125

Manufacturer

JI G

Working Height 48.02m Horizontal 24.38m Outreach

Closed Length 16 18m Closed Height 3.05m Closed Width 2.49m

Platform Size 2.44m x 0.91m Rotation Continuous Max SWL 340ka Weight 23236kg

Reach Below Ground 0.91m 5.03m Operational Full Width

Alternative machines

SX180

Manufacturer

Genie

24.38m
























50 45 Envelope 35 20 Working 15 10 5 20 25 30 35

S 12 HO W TO SEE THE STATE OF T





SX180

booms

Working Height 48.15m Horizontal 23.55m **Outreach**

Closed Length 15 1m Closed Height 3.1m 2.5m Closed Width

Platform Size (extended) 2.44(5)m x 0.91m

Continuous Rotation Max SWL (extended) 450(270)kg

Weight 26127kg Reach Below Ground 6.1m

Manufacturer JI G



Operational Full Width








5m









Working Height 56.86m Horizontal 24.38m Outreach


Closed Length 14 33m Closed Height 3.05m Closed Width 2.49m

Platform Size 2.44m x 0.91m Rotation Continuous Max SWL 340ka Weight 25095kg

Operational Full Width 5.03m Manufacturer

Genie











Van Mounted



0345 745 0000 nationwideplatforms.co.uk

- More than 290 units available to hire across the UK
- Versalift boom assemblies on most models
- All vehicles comply to EN280:2001 and are CE certified
- Dual roof mounted beacons/working lights
- Reverse alarms and night switches

- · Steel bulkheads
- Internal racking, ply lining and hot and cold hand wash unit option available
- Tracker devices available as options on long term hires
- Operated or self-drive options available

Machine type by product code

VT125K	V14E
VT12E	V16E





van mounts

VT12E

van mounts

Working Height 12.0m Horizontal 7.0m **Outreach**

Max Horiz. Outreach (full SWL) 7.0m Overall travel Length 6 8m Overall travel Height 3.3m Overall travel Width 2 2m Platform/cage size 1.0m x 0.60m

Max SWL 200ka Gross vehicle weight class 3500kg Operational Full Width 2 45m Minimum Operational width As above (straight down jacking)

Alternative machines

V12E VI125K

Manufacturer **GSR**

Working Height 13.0m Horizontal 7.0m Outreach

Max Horiz. Outreach (full SWL) 7.0m Overall travel Length 6 74m Overall travel Height 3.15m Overall travel Width 2 2m Platform/cage size 1.0m x 0.60m Max SWL 200ka Gross vehicle weight class 3500kg Operational Full Width

2 45m As above Alternative machines

V14E

Manufacturer

Versalift






















Minimum Operational width

(straight down jacking)










13.0m









van mounts

V16E

van mounts

Working Height 14.2m Horizontal 7.3m **Outreach**

Max Horiz. Outreach (full SWL) 7.3m Overall travel Length 7 34m Overall travel Height 3.8m Overall travel Width 2 2m Platform/cage size 1.0m x 0.6m Max SWL 200ka

Operational Full Width

(straight down jacking)

14.2m

Gross vehicle weight class 5200kg 2 25m Minimum Operational width As above **Alternative** machines

V16E

Manufacturer

Versalift

Working Height 16.5m Horizontal 7.3m Outreach

Max Horiz. Outreach (full SWL) 7.3m Overall travel Length 8 22m Overall travel Height 4.0m 2 2m Overall travel Width Platform/cage size 1.0m x 0.6m Max SWL 200ka Gross vehicle weight class 6500kg

Operational Full Width Minimum Operational width


(straight down jacking)


2 45m As above **Alternative** machines

T16N T17GS

Manufacturer

Versalift









Truck Mounted



- More than 300 units available to hire across the UK
- Working heights from 13m to 90m
- Self drive options up to 26m (3.5T and 7.5T chassis)
- All vehicles available with experienced IPAF trained operators

- Most cost effective method of access for short term hires
- Large fleet of 4 wheel drive machines – ideal for off road application
- Narrow jacking and zero tail swing models available
- Models with SWL of up to 700kg

TI135EX	T22AS	T38B
T14GS	T22GS	T44B
T17BE	T22GSH	T46B
T17GS	T26CX	T48P
T18AS	T26GS	T50JB
T18ASH	T27R	T56B-XR
T18ASH T20HC	T27R T28RX	T56B-XR T58R
T20HC	T28RX	T58R
T20HC T20GS	T28RX T33R	T58R T70B



T14GS

truck mounts

Working Height 13.3m **Outreach**

Max Reach Below 0m

Overall Travel Length Overall Travel Height

6.1m n/a

2.6m

4.7m

2.0m Overall Travel Width 1 0m X 0 6m Platform Cage Size

230ka Max SWL 3500kg Gross Vehicle Weight 2.4m Operational Full Width

2.4m Minimum Operational Width 20kN / 20kN Point Load Front / Rear

Manufacturer

Versalift






















Working Height 14.0m Outreach 8.0m

Overall Travel Length 7.2m 2.95m Overall Travel Height Overall Travel Width 2 1m Platform Cage Size 1.4m x 0.7m Max SWL 200kg Gross Vehicle Weight 3500ka Operational Full Width 2.4m Minimum Operational Width 2.4m

28kN / 28kN Point Load Front / Rear

Manufacturer

GSR




















0345 745 0000 nationwideplatforms.co.uk



8.0m

T17GS

truck mounts

Working Height 17.2m Outreach 10.0m

Max Horiz, Outreach (full SWL) 8.0m Overall Travel Length 7.2m 3.7m Overall Travel Height Overall Travel Width 2.5m Platform Cage Size 1 0m x 0 6m Max SWL 265ka Gross Vehicle Weight 6500kg Operational Full Width 2.4m Minimum Operational Width 2.4m Point Load Front / Rear 60kN / 60kN **Alternative** machines

T18AS

Manufacturer Versalift

Working Height 17.1m 9.5m Outreach

Max Horiz, Outreach (full SWL) 6.7m Overall Travel Length 7.1m 2.95m Overall Travel Height Overall Travel Width 2.2m Platform Cage Size 1 4m x 0 7m Max SWL 250ka Gross Vehicle Weight 3500kg Operational Full Width 2.4m

Point Load Front / Rear 28kN / 28kN **Alternative** machines

T18AS

Manufacturer GSR






















Minimum Operational Width








2.4m













T18ASH

truck mounts

Working Height 18.0m Outreach

Overall Travel Length 7.0m 3.0m Overall Travel Height Overall Travel Width 2 3m Platform Cage Size 1.4m x 0.73m 230kg 3500kg

Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear

13.0m

T18ASH T20M T20HC T20GS

Manufacturer

Ascendant

Alternative

machines










3.6m

2.3m

28kN / 28kN







0345 745 0000 nationwideplatforms.co.uk

Working Height 18.0m 13.0m Outreach

Max Horiz. Outreach (full SWL) 13.0m Overall Travel Length 7.0m 3.0m Overall Travel Height Overall Travel Width 2.1m

Platform Cage Size 1 4m x 0 73m Max SWL 230ka Gross Vehicle Weight 5000kg Operational Full Width 3.8m

Minimum Operational Width 2.3m Point Load Front / Rear 50kN / 50kN

Alternative machines

T18AS

Manufacturer

Ascendant





















T20HC

truck mounts

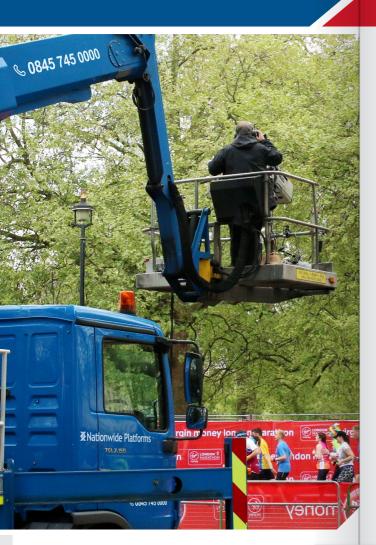

Working Height 20.0m Outreach 9.0m

Overall Travel Length 6.76m Overall Travel Height 2.5m Overall Travel Width 2 1m Platform Cage Size 1.4m x 0.7m Max SWL 300kg Gross Vehicle Weight 3500kg Operational Full Width 2.93m 2.93m Minimum Operational Width

Alternative machines T20M

Manufacturer

CTE





Point Load Front / Rear










28kN / 28kN









T20M

truck

Working Height 20.0m Outreach

8.2m Overall Travel Length 7.46m Overall Travel Height 2.77m Overall Travel Width 2 1m 1.4m x 0.7m

Platform Cage Size Max SWL 280kg Gross Vehicle Weight 3500ka Operational Full Width 2.3m

Minimum Operational Width 2.3m 25kN / 18kN Point Load Front / Rear

Alternative machines

Manufacturer

GSR


















0345 745 0000 nationwideplatforms.co.uk

Working Height 20.0m Outreach

Max Horiz, Outreach (full SWL) 8.6m Max Reach Below 0m 2.0m 7 65m Overall Travel Length Overall Travel Height 3.0m Overall Travel Width 2 1m 1.4m x 0.7m Platform Cage Size Max SWL 250kg Gross Vehicle Weight 3500ka

Minimum Operational Width 2.5m

Point Load Front / Rear 30kN / 19kN mounts

Alternative machines 11.0m (80kg)

T20C T21JC

Manufacturer

Multitel





Operational Full Width








3.4m













T22AS

truck mounts

Working Height 21.0m Outreach

Max Reach Below 0m Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight

Operational Full Width Minimum Operational Width Point Load Front / Rear

10.0m

n/a 6.8m 2.6m 2.1m 14m x 0 7m 280ka 3500kg 2.9m 2.9m

Alternative machines

T20C T20M

Manufacturer

CTF

Working Height 22.0m Outreach 17.5m

Max Reach Below 0m n/a Overall Travel Length 9.2m 3.5m Overall Travel Height Overall Travel Width 2.4m Platform Cage Size 1 8m x 1 1m Max SWL* 280ka Gross Vehicle Weight 7500kg 4.5m Operational Full Width Minimum Operational Width 2.5m

Point Load Front / Rear 60kN / 60kN **Alternative** machines

Manufacturer Ascendant

T22GS












28kN / 28kN


































T22GSH

Outreach

Max Reach Below 0m

truck mounts

Working Height 22.0m Outreach 17.7m

Max Reach Below 0m Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size

18m x 08m Max SWL* 280ka Gross Vehicle Weight 7500kg Operational Full Width 4.5m Minimum Operational Width 2.5m Point Load Front / Rear 60kN / 60kN **Alternative** machines

Manufacturer

GSR

T22AS

Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear

Alternative machines T22GS

Manufacturer **GSR**













n/a

8.7m

3.55m


2.5m

















Working Height 22.0m





17.7m

n/a

8.7m

3.55m

2.5m

280ka

8200kg

4.5m

2.5m

1 8m x 0 8m

60kN / 60kN









18 Envelope Working





T26GS

truck mounts

Working Height 26.0m Outreach

Overall Travel Length 7 45m 3.9m Overall Travel Height Overall Travel Width 2 6m Platform Cage Size

Max SWL Gross Vehicle Weight Operational Full Width

Minimum Operational Width Point Load Front / Rear

12.5m

1.4m x 0.7m 230kg 14000ka 3.12m

3.12m

140kN / 140kN

Alternative machines

T26WX T26KX

Manufacturer

CTE













Working Height 26.0m Outreach

Max Horiz. Outreach (full SWL) 14.0m Overall Travel Length 7.8m Overall Travel Height 3.6m Overall Travel Width 2.5m Platform Cage Size 1 4m x 0 7m Max SWL 280ka Gross Vehicle Weight 7500kg Operational Full Width 3.5m Minimum Operational Width 3.5m Point Load Front / Rear 60kN / 60kN

machines 14.0m (280kg) T26C

> Manufacturer **GSR**

Alternative


















T28RX

truck mounts

Working Height 27.0m Outreach**

21.0m (100kg)

Max Horiz, Outreach (full SWL) 16.0m Max Reach Below 0m n/a 7 87m Overall Travel Length Overall Travel Height 3.3m Overall Travel Width 2 54m 1.85m x 1.0m Platform Cage Size Max SWL 320kg Gross Vehicle Weight 7500ka Operational Full Width 5.1m

Alternative machines

T26C

Manufacturer Ruthman

Working Height 28.0m Outreach** 21.3m (100kg)

Max Horiz, Outreach (full SWL) 16.0m Max Reach Below 0m n/a 8 12m Overall Travel Length Overall Travel Height 3.8m Overall Travel Width 2 5m 1.7m x 0.86m Platform Cage Size Max SWL 320kg Gross Vehicle Weight 11000ka Operational Full Width 3.8m Minimum Operational Width 2.5m Point Load Front / Rear 110kN / 50kN

Alternative machines

T26CX

Manufacturer Ruthman





Minimum Operational Width

Point Load Front / Rear








2.5m



72kN / 55kN






























T33RH

truck mounts

Working Height 33.0m Outreach**

21.2m (100kg)

Alternative machines T33RH Manufacturer

Max Horiz. Outreach (full SWL) 16.5m Overall Travel Length 8.7m 3 56m Overall Travel Height Overall Travel Width 2.5m Platform Cage Size 17m x 0 86m

Ruthman

Max SWL

320ka Gross Vehicle Weight 7490kg Operational Full Width 5.32m Minimum Operational Width 2.53m Point Load Front / Rear 56kN / 42kN


















Working Height 33.0m Outreach** 21.2m (100kg)

Max Horiz. Outreach (full SWL) 16.5m Max Reach Below 0m n/a 8.7m Overall Travel Length Overall Travel Height 3.56m Overall Travel Width 2.5m 1.7m x 0.86m Platform Cage Size Max SWL 320kg Gross Vehicle Weight 8600ka Operational Full Width 5.32m Minimum Operational Width 2.53m Point Load Front / Rear 56kN / 42kN

Alternative machines

T37R T38B

> Manufacturer Ruthman























T37R

truck mounts

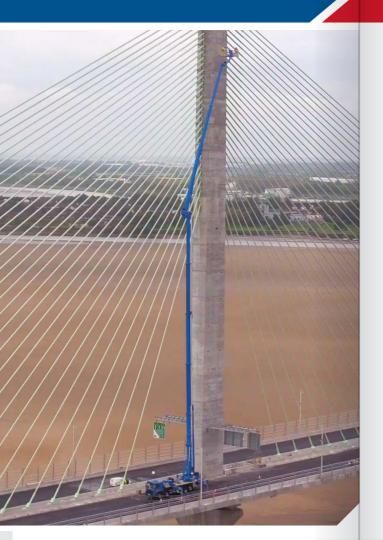

Working Height 37.0m Outreach**

Max Horiz. Outreach (full SWL) 21.0m Max Reach Below 0m 6.0m 8.9m Overall Travel Length Overall Travel Height 3.9m Overall Travel Width 2.55m

Platform Cage Size (extended) 2.3(3.6)m x 0.9m Max SWL

Gross Vehicle Weight Operational Full Width Minimum Operational Width

Point Load Front / Rear

30.0m (100kg)


Alternative machines T38B

Manufacturer Ruthman

500kg 18000kg 6.4m 2.6m

170kN / 140kN







25.3m (120kg)

Max Horiz, Outreach (full SWL) 21.0m Max Reach Below 0m 6.5m 10 0m Overall Travel Length Overall Travel Height 3.7m Overall Travel Width 2.5m Platform Cage Size (extended) 2.3(3.7)m x 1.05m

Max SWL 600kg Gross Vehicle Weight 18000ka Operational Full Width 6.2m

Minimum Operational Width 2 8m

Point Load Front / Rear 150kN / 150kN

Alternative machines

T37B T37R

Manufacturer

Bronto
























0345 745 0000 nationwideplatforms.co.uk

Working Height 44.0m Outreach** 24.0m (120kg)

Max Horiz, Outreach (full SWL) 21.0m Max Reach Below 0m 5.0m 10 0m Overall Travel Length Overall Travel Height 3.8m Overall Travel Width 2 5m Platform Cage Size 2.4(3.7)m x 1.0m Max SWL 600kg Gross Vehicle Weight 18000ka Operational Full Width 6.2m Minimum Operational Width 2.8m

Point Load Front / Rear 150kn / 150kn **Alternative** machines

T46B

Manufacturer Bronto
















T48P

truck mounts

Working Height 46.0m Outreach**

24.5m (120kg)

Max Horiz. Outreach (full SWL) 20.0m Max Reach Below 0m 6.5m 10.5m Overall Travel Length Overall Travel Height 3.7m Overall Travel Width 2.5m 2.47m x 1.05m Platform Cage Size

Max SWL 600kg Gross Vehicle Weight 18000ka Operational Full Width 6.2m 2.8m Minimum Operational Width

Point Load Front / Rear 150kN / 150kN **Alternative** machines

T48P T50JB

Bronto

Manufacturer

Working Height 48.0m Outreach** 28.0m (100kg)

Max Horiz, Outreach (full SWL) 22.0m Max Reach Below 0m 13.5m 10 4m Overall Travel Length Overall Travel Height 4.0m Overall Travel Width 2 55m Platform Cage Size (extended) 2.15(3.8)m x 1.05m Max SWL 600kg Gross Vehicle Weight 17600ka Operational Full Width 6.3m

Minimum Operational Width 2.55m Point Load Front / Rear 160kN / 160kN **Alternative** machines

T50JB

Manufacturer

Palfinger









































28.0m

T56B-XR

truck mounts

Working Height 50.0m Outreach**

35.0m (120kg)

T58B T48P T56B

Max Horiz, Outreach (full SWL) 25.0m Max Reach Below 0m 11.0m 12 0m Overall Travel Length Overall Travel Height 4.0m Overall Travel Width 2.5m

Platform Cage Size (extended) 2.2(3.7)m x 0.9m 600kg

Max SWL Max SWL Gross Vehicle Weight 26000ka Operational Full Width 8.0m Minimum Operational Width 2 8m

Point Load Front / Rear 190kN / 190kN **Alternative** machines

Manufacturer

Bronto
























0345 745 0000 nationwideplatforms.co.uk

Working Height 56.0m Outreach** 37.3m (200kg)

Max Horiz, Outreach (full SWL) 32.0m Max Reach Below 0m 9.0m 11.9m Overall Travel Length Overall Travel Height 3.7m Overall Travel Width 2 5m Platform Cage Size (extended) 2.4(3.7)m x 1.0m Max SWL 600kg

Gross Vehicle Weight 26000ka Operational Full Width 9.0m Minimum Operational Width 3.0m

Point Load Front / Rear 180kN / 180kN **Alternative** machines

T50JB

Manufacturer

Bronto
























Working Height 58.0m Outreach**

Max Reach Below 0m

38.0m (100kg)

Alternative machines

T70B T66M-1 T56B

Manufacturer

គ្គ Max Reach Below um ន Overall Travel Length 11.7m Overall Travel Height 3.99m Overall Travel Width 2 55m

Max Horiz, Outreach (full SWL) 31.0m

Ruthman

Platform Cage Size (extended) 2.3(3.6)m x 0.9m Max SWL 500kg

Gross Vehicle Weight 26000ka Operational Full Width 9.67m Minimum Operational Width 2.85m

6.0m

Point Load Front / Rear

220kN / 220kN

Working Height 70.0m 34.8m (120kg) Outreach

Max Horiz, Outreach (full SWL) 30.0m Max Reach Below 0m 6.0m Overall Travel Length 12 5m Overall Travel Height 4.2m Overall Travel Width 2 5m

Platform Cage Size (extended) 2.4(3.7)m x 1.0m Max SWL 600kg

Gross Vehicle Weight Operational Full Width

Minimum Operational Width Point Load Front / Rear

3.2m 255kN / 255kN

36000ka

8.0m

Alternative machines T90B

Manufacturer Bronto

Cage winch option available Extra capacity basket available

2020









































T90B

truck mounts

Working Height 70.0m **Outreach**

34.8m (200kg)

Alternative machines T70B

Max Horiz, Outreach (full SWL) 30.0m Max Reach Below 0m 11.0m Overall Travel Length 12.0m Overall Travel Height 3.9m Overall Travel Width 2.4m

Manufacturer

Bronto

Platform Cage Size (extended) 2.4m(3.7m) x 1.0m Max SWL 600kg

Gross Vehicle Weight 36000kg Operational Full Width 8.0m Minimum Operational Width 3.2m One sided jacking

56 m 230 kN / 230 kN

Cage winch option available




















0345 745 0000 nationwideplatforms.co.uk

Working Height 90.0m Outreach** 31.0m (400kg)

Max Horiz, Outreach (full SWL) 29.0m Max Reach Below 0m 12.0m 15 6m Overall Travel Length Overall Travel Height 4.0m Overall Travel Width 2 5m Platform Cage Size (extended) 2.4(3.7)m x 1.0m Max SWL 600kg Gross Vehicle Weight 48000ka Operational Full Width 7.0m

Minimum Operational Width n/a Point Load Front / Rear 270kN / 270kN

Alternative machines

T70B

Manufacturer Bronto

Cage winch option available






















Tracked Booms



- More than 130 available to hire on either operated or self-operated basis
- Can be operated with IPAF 1b license
- Allows access to restricted areas that traditional booms can't
- Lithium battery models are available

- le Reduces the ground ted bearing pressure on soft ground and
 - Allows greater stability for work on uneven surfaces
 - Easily transportable

delicate flooring

- Can be used for a variety of applications including facilities management and retail
- · Working heights up to 31m

Machine type by product code

TB14HB

TB14HE

TB15HB

TB15HE

TB17HB

TB17HE

TB18PB

TB20HB

TDOO ID

TB20JB

TB26HB TB26HF

TB30MB

TB31TB





TB14HE

tracked booms

Working Height 14.0m Horizontal Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width

DeckSize Rotation SWL

Weight

Outrigger Footprint Min Op Width

7.0m

4 06m 1.99m

0.78m 1 33m x 0 69m

360° 200kg 1750kg 27m x 27m 2.7m

Alternative machines

TB14HE TB17HE TB17HB

Manufacturer

Hinowa




















Working Height 14.0m 7.0m Horizontal Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize

Rotation SWL Weight Outrigger Footprint

Min Op Width

1 33m x 0 69m 360° 200kg 1750kg 27m x 27m

4 06m

1.99m

0.78m

Alternative machines

TB14HB TB17HE TB17HB

Manufacturer

Hinowa












2.7m









16 14 12 Envelope 4.0m Working 7.0m 10 12 14





TB15HE

tracked booms

Working Height 15.4m Horizontal 6.6m **Outreach**

Closed Length Closed Height Rails Up / Fixed Rails

Closed Width DeckSize Rotation

360° 230kg **SWL** 1950kg Weight 28m x 28m Outrigger Footprint 2.8m Min Op Width

Alternative

TB15HE TB17HF TB17HB

machines

Manufacturer

Hinowa











4 02m


1.99m

0.75m

1 33m x 0 69m







Working Height 15.4m 6.6m Horizontal Outreach

Closed Length Closed Height

Rails Up / Fixed Rails Closed Width

DeckSize Rotation

SWL Weight

Outrigger Footprint

Min Op Width

230kg 1950kg 2.8m x 2.8m 2.8m

4 02m

1.99m

0.75m

360°

1 33m x 0 69m

Alternative machines

TB15HB TB17HF TB17HB

Manufacturer

Hinowa
























16

6.6m

TB17HE

tracked booms

Working Height 17.06m Horizontal 7.5m **Outreach**

Closed Length Closed Height Rails Up / Fixed Rails

360° 230ka

Outrigger Footprint 2 88m x 2 89m Min Op Width 2.88m

Alternative machines

TB17HE TB20HF TB20HB

Manufacturer

Hinowa

4 52m 2.0m Closed Width 0.79m DeckSize 1 33m x 0 69m

Rotation **SWL** Weight 2280kg

















Working Height 17.06m Horizontal 7.5m Outreach

Closed Length Closed Height Rails Up / Fixed Rails

Closed Width

DeckSize 1 33m x 0 69m 360° Rotation SWL 230ka

Weight Outrigger Footprint

Min Op Width 2.88m

2.88m x 2.89m

Alternative machines

TB17HB TB20HF TB20HB

Manufacturer

Hinowa













4 52m


0.79m

2280kg

2.0m







16 14 Envelope 17.06m Working 10 12 14





TB20HB

tracked booms

Working Height 17.6m Horizontal 9.2m Outreach

Closed Length
Closed Height
Rails Up / Fixed Rails
Closed Width

 Closed Width
 0.78m

 DeckSize
 1.3m x 0.7m

 Rotation
 360°

 SWL
 200kg

 Weight
 2350kg

 Outrigger Footprint
 3.1m x 3.1m

Alternative machines

TB17HE TB20HE TB20HB

Manufacturer

Hinowa

Dual

Min Op Width











5 21m

1.95m

3.1m







Working Height 20.1m Horizontal 9.7m Outreach

Closed Length
Closed Height
Rails Up / Fixed Rails
Closed Width
DeckSize

 DeckSize
 1.33m x 0.69m

 Rotation
 360°

 SWL
 230kg

 Weight
 2880kg

 Outrigger Footprint
 2.92m x 2.92m

Min Op Width 2.92m

1m Alternative machines

TB26HE TB26HB TB20HE

Manufacturer

Hinowa











5 01m


1.99m

0.79m













TB20JB

tracked booms

Working Height 20.1m Horizontal 9.7_m **Outreach**

Closed Length Closed Height Rails Up / Fixed Rails

Closed Width DeckSize Rotation

360° 230kg **SWL** 2880kg Weight 2 92m x 2 92m Outrigger Footprint 2.92m

Min Op Width

Alternative machines

TB26HE TB26HB TB17HB TB20HB

Manufacturer

Hinowa











5 01m

1.99m


0.79m

1 33m x 0 69m









0345 745 0000 nationwideplatforms.co.uk

Working Height 20.1m Horizontal

Outreach Closed Length Closed Height

Rails Up / Fixed Rails

Closed Width

DeckSize Rotation

SWL

Weight Outrigger Footprint

Min Op Width

9.7m

5 01m 1.99m

0.79m

1 33m x 0 69m 360° 230kg

2880kg 2.92m x 2.92m 2.92m

Alternative machines

TB26HE TB26HB TB17HB TB20HB

Manufacturer

Hinowa






















TB26HE

tracked booms

Working Height 25.7m Horizontal 13.6m **Outreach**

Closed Length 6 34m Closed Height 1.98m Rails Up / Fixed Rails

0.99m Closed Width 1 33m x 0 69m DeckSize


360° Rotation 230kg **SWL** 4415kg Weight

4.07m x 3.97m Outrigger Footprint 3.97m Min Op Width

Alternative machines TB26HE

Manufacturer

Hinowa



Working Height 25.7m 13.6m Horizontal Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width

DeckSize Rotation

SWL Weight

Outrigger Footprint Min Op Width

Alternative machines

TB26HB

Manufacturer

Hinowa











6 34m

1.98m

0.99m

360°

230kg

4415kg

3.97m


1 33m x 0 69m

4.07m x 3.97m













tracked booms

TB31TB

tracked booms

Working Height 30m Horizontal 14m **Outreach**

6.65m Closed Length 2.3m Closed Height 1 6m Closed Width

0.70m x 1.60m Platform Size

Rotation 400° Max SWL 270kg Weiaht 5600ka Min Op Width 3.3m

Alternative machines

TB31TB

Manufacturer

Multitel

Working Height 31.0m 14.7m Horizontal Outreach

Closed Length 7 23m 1.98m Closed Height

Rails Up / Fixed Rails Closed Width

DeckSize Rotation

Weight Outrigger Footprint

Min Op Width

5.45m x 5.15m 2.75m

Alternative machines

TB26HB TB26HE

Manufacturer

Teupen

SWL









1.58m

360°

250kg

4350kg




1 20m x 0 80m









36 34 32 30 28 Envelope 26 24 22 20 250kg Working 8 10 12 14 16 18 20 22 24 26 28 30 32





Telehandlers



- Access to the UK's largest fleet of telehandlers
- Full range from compact 4m machines to 30m rotational telehandlers
- · Rough terrain forklift
- Ideal for lifting heavy materials to height

Machine type by product code

JCB520-40	JCB535-140
JCB520-50	HTL4017
JCB525-60	JCB540-170
JCB531-70	JCB540-200
JCB3070	MRT2150
JCB926	ROTO6024
JCB533-105	MRT2540
JCB535-125	ROTO4026
HTL4014	ROTO4030



0345 745 0000 nationwideplatforms.co.uk



A **LOXAM** Company




Max Lift Height 4.0m 2.59m **Max Forward** Reach

Overall Length 2.92m Overall Height 1.97m Overall Width 1.56m Max Capacity 2000kg Max Lift Capacity (full reach) 1000kg Weight 4400kg Outside Turn Radius

Manufacturer JCB







3.05m



telehandlers

JCB525-60


telehandlers

Max Lift Height 5.0m Max Forward 2.82m Reach

Overall Length 3.08m
Overall Height 2.12m
Overall Width 1.84m
Max Capacity 2000kg
Max Lift Capacity (full reach)
Weight 4870kg
Outside Turn Radius 3.1m

Manufacturer JCB





0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 6.0m Max Forward 3.06m Reach

Overall Length 3.38m
Overall Height 1.89m
Overall Width 1.84m
Max Capacity 2500kg
Max Lift Capacity
(full reach)
Weight 5490kg
Outside Turn Radius 3.71m

Manufacturer JCB









telehandlers

JCB3070


telehandlers

Max Lift Height 7.0m Max Forward 3.7m Reach

Overall Length 4.38m
Overall Height 2.49m
Overall Width 2.23m
Max Capacity 3500kg
Max Lift Capacity 2400kg
(full reach)
Weight 7060kg
Outside Turn Radius 3.7m

Manufacturer JCB





0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 7.0m Max Forward 3.7m Reach

Overall Length 4.99m
Overall Height 2.49m
Overall Width 2.23m
Max Capacity 3000kg
Max Lift Capacity (full reach)
Weight 6900kg
Outside Turn Radius 3.7m

Manufacturer JCB










Max Lift Height 7.67m N/A **Max Forward** Reach

Overall Length 3.6m Overall Height 2.57m Overall Width 2 2m Max Capacity 3000ka Max Lift Capacity 2600kg (full reach) 5910kg Weight Outside Turn Radius 4.49m

Manufacturer JCB





0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 10.2m 6.83m **Max Forward** Reach

Overall Length 4.38m Overall Height 2.49m Overall Width 2 29m 3300ka Max Capacity Max Lift Capacity 1000kg (full reach) 8850kg Weight Outside Turn Radius 3.7m

Manufacturer JCB









HTL4014


telehandlers

Max Lift Height 12.28m Max Forward 8.1m Reach

Overall Length 5.8m
Overall Height 2.59m
Overall Width 2.35m
Max Capacity 3500kg
Max Lift Capacity (full reach)
Weight 10066kg
Outside Turn Radius 3.75m

Manufacturer JCB






0345 745 0000 nationwideplatforms.co.uk

Max Lift Height 13.6m Max Forward 9.8m Reach

Overall Length 6.46m
Overall Height 2.6m
Overall Width 2.43m
Max Capacity 4000kg
Max Lift Capacity (full reach)
Weight 10710g
Outside Turn Radius 4.5m

Manufacturer Haulotte








Max Lift Height 13.78m Max Forward 9.7m Reach

Overall Length 6.23m
Overall Height 2.59m
Overall Width 2.35m
Max Capacity 3500kg
Max Lift Capacity (full reach)
Weight 11090kg

Manufacturer JCB



Outside Turn Radius



4.1m

0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 16.7m Max Forward 12.9m Reach

Overall Length 6.65m
Overall Height 2.6m
Overall Width 2.43m
Max Capacity 4000kg
Max Lift Capacity 700kg
(full reach)
Weight 12000kg
Outside Turn Radius 4.5m

Manufacturer Haulotte









telehandlers

JCB540-200


telehandlers

Max Lift Height 16.7m Max Forward 12.5m Reach

Overall Length 6.36m
Overall Height 2.69m
Overall Width 2.44m
Max Capacity 4000kg
Max Lift Capacity
(full reach)
Weight 12060kg
Outside Turn Radius 4.1m

Manufacturer JCB





0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 20.0m Max Forward 15.9m Reach

Overall Length 6.81m
Overall Height 2.72m
Overall Width 2.44m
Max Capacity 4000kg
Max Lift Capacity
(full reach)
Weight 12985kg
Outside Turn Radius 4.1m

Manufacturer JCB









Max Lift Height 20.6m Max Forward 18.1m Reach

 Overall Length
 6.78m

 Overall Height
 3.05m

 Overall Width
 2.43m


 Max Capacity
 4999kg

 Max Lift Capacity (full reach)
 600kg

 Weight
 16095kg

 Outside Turn Radius
 4.04m
 Manufacturer Manitou

RT4



0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 23.9m Max Forward 20.8m Reach

Overall Length 7.43m
Overall Height 3.1m
Overall Width 2.49m
Max Capacity 6000kg
Max Lift Capacity 850kg
(full reach)
Weight 18750kg

18750kg 6.5m Manufacturer Merlo



Outside Turn Radius





20 87

telehandlers

ROTO4026

telehandlers

Max Lift Height 24.6m Max Forward 18.5m Reach

 Overall Length
 7.82m

 Overall Height
 3.05m

 Overall Width
 2.43m

 Max Capacity
 4000kg


 Max Lift Capacity (full reach)
 400kg

 Weight
 17165kg

 Outside Turn Radius
 4.04m

Manufacturer Manitou





0345 745 0000 nationwideplatforms.co.uk


Max Lift Height 26.0m Max Forward 22.9m Reach

Overall Length 6.98m
Overall Height 2.95m
Overall Width 2.4m
Max Capacity 4000kg
Max Lift Capacity (full reach)
Weight 16050kg

Outside Turn Radius 6.85m

Manufacturer Merlo







119

ROTO4030

telehandlers


Max Lift Height 29.5m Max Forward 25.5m Reach

Overall Length 7.56m
Overall Height 3.1m
Overall Width 2.49m
Max Capacity 4000kg
Max Lift Capacity 400kg
(full reach)

Weight 19200kg Outside Turn Radius 6.7m Manufacturer Merlo











Safety Solutions, Attachments & Accessories



Safety and Productivity Innovation

Available exclusively through Nationwide Platforms, our BlueSky innovations can help bring new levels of productivity and safety to your project.

- Available to hire and pre-fitted with all applicable Nationwide Platforms equipment
- Enables users to conform to contractor specific mandates surrounding key safety issues
- Material handling solutions designed to boost efficiencies and convenience whilst tackling risks associated with manual handling
- For bespoke solutions please speak to your account manager

Machine type by product code

Solo-Gyps	SkyScreen™
SkySiren®	SkyRak Edge™
SkySiren® PCS™	SkyTel
SkySentry™	SkyRakTether™
SkyRak [®]	SkyShield
SkyRakPlus [®]	Accessories
SkyRakBoom [®]	







Nationwide Platforms can now offer the UK's first drywall MEWP attachment. Solo-Gyps has been designed solely for use with the 4.9m Leonardo HD low level access platform. Featuring a motorised track, Solo-Gyps enables the simpler positioning of plasterboard ceiling panels, saving manpower and effectively allowing one operator to lift panels without assistance. This is ideal for interior fit-out projects.





- To be used on the 4.9m Leonardo HD low level access platform only
- Three different height positions to clear even the tallest operator
- Allows one person to lift panels up to 40kg without assistance thus reducing manual handling
- Increases productivity as operators are able to fit more ceiling panels in one day
- Attachment is suitable for indoor use only

Nationwide Platforms' Secondary Guarding solution is the pioneering SkySiren®; designed to reduce the risks associated with entrapment. Not only does it stop the MEWP when an entrapment situation is detected, to prevent further crushing, it also has a flashing light and emergency klaxon to attract the attention of colleagues on the ground to enact the emergency lowering procedure without delay.





The unique pressure sensitive system, acts as an 'emergency switch' in an entrapment situation. It is designed to react to the body pressure of an operator trapped against the boom lift's control panel.

The SkySiren® is a CE Certified retro-fit system capable of being fitted to most boom-type MEWPs.



Look for the SkySiren® icon to identify which machines can benefit from this unique attachment.





In addition to the pioneering SkySiren® Nationwide Platforms have introduced the next level in safe operating at height with SkySiren®PCS™. Working in concert with SkySiren®, the SkySiren®PCS™ attachment uses proximity sensing technology to help avoid entrapment situation occurring.





The continuous operation of proximity sensors built into the the SkySiren®PCS™ provides a sensing 'zone of protection', alerting the operator to potential hazards before they occur. The system has been designated as Intelligent Secondary Guarding.

The award winning design provides maximum protection, while at the same time not impeding either the MEWP's functionality nor the operators ability to carry out tasks. The SkySiren®PCS™ is CE Certified retro fit system capable of being fitted to most boom and scissor type MEWPs.



Look for the SkySiren®PCS™ icon to identify which machines can benefit from this unique attachement.

SkySentry™ is a simple and effective fleet management system designed to help you reduce costs, drive efficiency and improve safety.



SkySentry™ is a full service system designed to improve the management of your powered access fleet across multiple sites and safeguard against unauthorised use.

The system offers unrivalled access and visibility of not only who is operating a machine at any one time. But also if they are correctly trained and authorised to do so.



Look for the SkySentry icon to identify which machines can benefit from this feature.





Fits most small electric scissor lifts to enable the fast and safe installation of materials up to 150kg (300kg if fitted as double and MEWP capacity allows). Materials are securely fastened using the straps provided.






The unique design of the SkyRak® means the load weight is transferred to the platform floor, avoiding materials being rested on the non-load bearing hand-rails

SkyRak® fits most small electric scissor lifts to enable the fast and safe installation of materials at height.



Look for the SkyRak® icon to identify which machines can benefit from this unique attachment.

SkyRakPlus® allows materials up to 600kg to be safely stored on most large decked diesel scissor lifts, with no weight put on the MEWP handrail.





A system of flexible heads support a wide variety of materials of many shapes and sizes including pipes, ducting, cladding, steelwork and bus bars.

When the MEWP is in motion, the materials are secured by use of moveable pins and straps.



Look for the SkyRakPlus® icon to identify which machines can benefit from this unique attachment.





SkyRakBoom® attachment

SkyRakBoom® allows the safe storage of materials up to 90kg in weight. Materials are stored with no weight on the MEWP's handrails.





Whilst the boom is in operation, materials are safely secured using the straps provided which significantly reduces the risk of materials falling to the ground.

SkyRakBoom® is suitable for installation to all standard Genie 6ft and 8ft 'boomtype' baskets.



Look for the SkyRakBoom® icon to identify which machines can benefit from this unique attachment.

SkyScreen™

attachment

Available on the majority of our boom lifts, SkyScreen™ reduces the risk of items failing from the platform basket while also offering added protection to personnel and machines on the ground.





Velcro and magnetised fittings allow operators to assemble and remove quickly and efficiently and its design allows all normal cage operations to be unaffected. Additional features include being fire retardant and wind resistant up 6m/s.



Look for the SkyScreen[™] icon to identify which machines can benefit from this unique attachment.





SkyRakEdge™ is a lightweight material handling attachment designed to safely and securely handle scaffold tubes or lattice and ladder edge protection beams on boom type Mobile Elevated Work Platforms (MEWPs).





SkyRakEdge™ securely holds up to 9 x scaffold tube 6m length, or 2 x 6m lattice beams, or 1 x 8m lattice beam*

It reduces the risk of materials falling from height and removes excess tube weight on the handrails

* Subject to maximum payload



Look for the SkyRakEdge™ icon to identify which machines can benefit from this unique attachment.

SkyTel from Nationwide Platforms is the latest innovation in safety and efficiency, reducing the need for the manual handling of antennas in the telecoms sector.





Provides a consistent, safe method of work for the installation and removal of antennas. Easily installed and removed in minutes.



Look for the SkyTel icon to identify which machines can benefit from this unique attachment.





SkyRakTether™, the lightweight tested tethering post for Mobile Elevating Work Platforms utilises a bespoke tethering bag providing safe storage for all tethered tools allowing operators to work freely at height and reducing the risk associated with items falling from height.





- · Reduces the risk of tools falling from height
- · Safe tool storage when not in use
- Improves productivity
- · Complies with many Tier One company's tethering policies
- · Complies with HSE guidance

Compatible with a wide range of booms and scissors type MEWPs. SkyShield is a robust, lightweight screen providing maximum visibility and offers a safer working environment helping to provide **COVID-19** protection





The lightweight aluminium frame holds a UV stable shatterproof polycarbonate barrier requires no tools to fit.

SkyShield is wind rated compliant and compatible with a range of vehicle mounted booms platforms including: GSR 22m, Ruthmann 28m (4x4) & 33m Bronto 38m, 50m, 56m, 70m, 90m - all with extending basket to 3.7m



Look for the SkyShield icon to identify which machines can benefit from this unique attachment.





Harness and Lanyards

IPAF strongly recommends that a full body harness with an adjustable lanyard (used to provide work restraint and adjusted to be as short as possible) is used when working from a boom type MEWP or vehicle mounted boom.

For more information from IPAF and details of their 'Clunk Click' harness campaign visit www.ipaf.org.

Harness and lanyards sets are available to purchase at the time of hire

Wheel Covers and Nappies

Most electric machines are fitted with non-marking tyres, designed to minimise the risk of damaging finished floors. These machines are easily identified by the non-marking tyre icon at the top of each page in the machine specification section of this brochure.

If a machine without non-marking tyres is required for work on a finished floor, wheel covers can be fitted to protect the flooring.

Lighting Frames and Camera Cages

Nationwide Platforms offers a variety of machines suitable for mounting lighting equipment and cameras, making them ideal for broadcast, cinema and other media applications.







For easy reference look out for the icons to identify which machines can be fitted with optional extras designed for media and broadcasting applications.

Key Pads

Key pads can be fitted to machines to minimise theft, unauthorised use of the machine and downtime caused by unscheduled equipment use. The key pads are programmable and weatherproof. Simply request a key pad when you place your order.

Pre-use Inspection Cards

Are your operators complying with the law each time they use powered access machines?

Regulations state that pre-use checks must be made before any operator uses an access platform, with users also required to make a record.

Our daily inspection cards have been designed to help powered access users conform to the law by acting as a comprehensive checklist and record of machine use.

Daily inspection sheets are now available to order with all hires.

Daily Machine Inspections

All of our powered access platforms are subject to extensive safety maintenance checks before they reach you. For extra peace of mind when machines are on your site for longer periods of work, we can also organise daily inspections by a qualified engineer from your local depot.

Please call today and ask for details on our pre-use inspection cards.



Accessories

Power to Platform

Most machines are fitted with a 110v socket at ground level that can be connected to your power source. Power is fed through an internal lead within the machine structure to the platform socket. Using this feature ensures that extension cables do not become trapped in the machine or dangle over buildings and other workers.



For easy reference look out for the icon to identify which machines have power to platform.

Onboard Generators

Many diesel powered machines also have an onboard generator which removes the need to hire a separate generator or have leads trailing from the machine across the workplace. Please request an onboard generator when ordering your machine.



Look out for the icon to identify the machines which can be hired with on board generators.

Chalwyn Valves

Chalwyn valves can be attached to a diesel engine air intake system. The valve is designed to safely shutdown the engine in the event of external vapours or gasses being sucked into the engine through the air intake.

In areas where there is a chance of vapour ignition a chalwyn valve will normally be specified by the site owner. Typical uses are in petrochemical plants and refineries including refurbishment of petrol station forecourts.

The valve can be fitted to all diesel scissor and boom lifts.

Please note: a minimum of 48 hours notice is required to fit the chalwyn valve.

Spark Arrestors

Spark arrestors are attached to the exhaust system of diesel machines to eliminate sparks from exiting the exhaust. Spark arrestors are usually specified by the site contractor or operator and are typically required on petrol station refurbishments, petrochemical plant works and refineries. Spark arrestors can be fitted on request, but must be fitted before the machine reaches site.

Please note: a minimum of 48 hours notice is required prior to delivery.

Earth Bonding

Nationwide Platforms has the UK's largest fleet of boom lifts fitted with earth straps that conform to National Grid specification. This continual safety link running from the platform to the ground safely deflects electric currents, protecting both the machine and its operator from electrocution.

Many site operators request earth bonding if the machine is to be used near live electrical apparatus in locations such as sub stations, power stations and live overhead cables.

Please remember to inform us at the time of booking if you require earth bonding on your machine.





Weight Conversion

Distance Conversion

Metric	Metric to Imperial Imperial to Metric (kg x 2.204 = lbs) (lbs x 0.4536 = kg)		
kg lbs	204 = lbs) kg lbs	(lbs x 0.453 lbs kg	6 = kg) lbs kg
500 - 1,102	27,000 - 59,524	1,000 - 453	54,000 - 24,493
1.000 - 2.204	27,500 - 60,627	2,000 - 907	55,000 - 24,947
1,500 - 3,306	28,000 - 61,729	3,000 - 1,360	56,000 - 25,401
2.000 - 4.409	28,500 - 62,831	4,000 - 1,814	57,000 - 25,854
2,500 - 5,511	29,000 - 63,933	5,000 - 2,267	58,000 - 26,308
3.000 - 6.613	29,500 - 65,036	6,000 - 2,721	59,000 - 26,761
3,500 - 7,716	30,000 - 66,138	7,000 - 3,175	60,000 - 27,215
4,000 - 8,818	30,500 - 67,240	8,000 - 3,628	61,000 - 27,669
4,500 - 9,920	31,000 - 68,343	9,000 - 4,082	62,000 - 28,122
5,000 - 11,023	31,500 - 69,445	10,000 - 4,535	63,000 - 28,576
5,500 - 12,125	32,000 - 70,547	11.000 - 4.989	64,000 - 29,029
6,000 - 13,227	32,500 - 71,650	12,000 - 5,443	65,000 - 29,483
6,500 - 14,330	33,000 - 72,752	13,000 - 5,896	66,000 - 29,937
7,000 - 15,432	33,500 - 73,854	14,000 - 6,350	67,000 - 30,390
7,500 - 16,534	34,000 - 74,957	15,000 - 6,803	68,000 - 30,844
8,000 - 17,636	34,500 - 76,059	16,000 - 7,257	69,000 - 31,297
8,500 - 18,739	35,000 - 77,161	17,000 - 7,711	70,000 - 31,751
9,000 - 19,841	35,500 - 78,264	18,000 - 8,164	71,000 - 32,205
9,500 - 20,943	36,000 - 79,366	19,000 - 8,618	72,000 - 32,658
10,000 - 22,046	36,500 - 80,468	20,000 - 9,071	73,000 - 33,112
10,500 - 23,148	37,000 - 81,570	21.000 - 9.525	74,000 - 33,565
11,000 - 24,250	37,500 - 82,673	22,000 - 9,979	75,000 - 34,019
11,500 - 25,353	38,000 - 83,775	23,000 - 10,432	76,000 - 34,472
12,000 - 26,455	38,500 - 84,877	24,000 - 10,482	77,000 - 34,926
12.500 - 27.557	39.000 - 85.980	25.000 - 11.339	78,000 - 35,380
13,000 - 28,660	39,500 - 87,082	26,000 - 11,793	79,000 - 35,833
13,500 - 29,762	40,000 - 88,184	27,000 - 12,246	80,000 - 36,287
14,000 - 30,864	40,500 - 89,287	28,000 - 12,700	81,000 - 36,740
14,500 - 31,966	41,000 - 90,389	29,000 - 13,154	82,000 - 37,194
15,000 - 33,069	41,500 - 91,491	30,000 - 13,607	83,000 - 37,648
15,500 - 34,171	42,000 - 92,594	31,000 - 14,061	84,000 - 38,101
16,000 - 35,273	42,500 - 93,696	32,000 - 14,514	85,000 - 38,555
16,500 - 36,376	43,000 - 94,798	33,000 - 14,968	86,000 - 39,008
17,000 - 37,478	43,500 - 95,900	34,000 - 15,422	87,000 - 39,462
17,500 - 38,580	44,000 - 97,003	35,000 - 15,875	88,000 - 39,916
18,000 - 39,683	44,500 - 98,105	36,000 - 16,329	89,000 - 40,369
18,500 - 40,785	45,000 - 99,207	37,000 - 16,782	90,000 - 40,823
19,000 - 41,887	45,500 -100,310	38,000 - 17,236	91,000 - 41,276
19,500 - 42,990	46,000 -101,412	39,000 - 17,690	92,000 - 41,730
20,000 - 44,092	46,500 -102,514	40,000 - 18,143	93,000 - 42,184
20,500 - 45,194	47,000 -103,617	41,000 - 18,597	94,000 - 42,637
21,000 - 46,297	47,500 -104,719	42,000 - 19,050	95,000 - 43,091
21,500 - 47,399	48,000 -105,792	43,000 - 19,504	96,000 - 43,544
22,000 - 48,501	48,500 -106,924	44,000 - 19,958	97,000 - 43,998
22,500 - 49,603	49,000 -108,026	45,000 - 20,411	98,000 - 44,452
23,000 - 50,706	49,500 -109,128	46,000 - 20,865	99,000 - 44,905
23,500 - 51,808	50,000 -110,231	47,000 - 21,318	100,000- 45,359
24,000 - 52,910	50,500 -111,333	48,000 - 21,772	101,000- 45,812
24,500 - 54,013	51,000 -112,435	49,000 - 22,226	102,000- 46,266
25,000 - 55,115	51,500 -113,537	50,000 - 22,679	103,000- 46,719
25,500 - 56,217	52,000 -114,640	51,000 - 23,133	104,000 - 47,173
26,000 - 57,320	52,500 -115,742	52,000 - 23,586	105,000- 47,628
26,500 - 58,422	53,000 -116,844	53,000 - 24,040	106,000- 48,081

Metric to	o Imperial	Imne	rial to	Metric
	281 = ft)		0.3048	
m ft	m ft	ft		m
6.0 - 19'8"	39.5 - 129'7"	15	-	4.57
6.5 - 21'4"	40.0 - 131'3"	20	-	6.10
7.0 - 23'0" 7.5 - 24'7"	40.5 - 132'10" 41.0 - 134'6"	25	-	7.62
7.5 - 24 / 8.0 - 26'4"	41.0 - 134 6	30	-	9.14
8.5 - 27'11"	42.0 - 137'10"	35	-	10.67
9.0 - 29'4"	42.5 - 139'6"	40		12.19
9.5 - 31'2"	43.0 - 141'1"	45		13.72
10.0 - 32'10"	43.5 - 142'9"	50		
10.5 - 34'6" 11.0 - 36'1"	44.0 - 144'5" 44.5 - 146'0"			15.24
11.5 - 37'10"	45.0 - 147'7"	55	-	16.76
12.0 - 39'5"	45.5 - 149'3"	60	-	18.29
12.5 - 41'0"	46.0 - 150'11"	65	-	19.81
13.0 - 42'8"	46.5 - 152'7"	70	-	21.34
13.5 - 44'3" 14.0 - 45'11"	47.0 - 154'3" 47.5 - 155'10"	75	-	22.86
14.5 - 47'7"	48.0 - 157'6"	80	-	24.38
15.0 - 49'2"	48.5 - 159'1"	85	-	25.91
15.5 - 50'10"	49.0 - 160'9"	90	-	27.43
16.0 - 52'6"	49.5 - 162'5"	95	-	28.96
16.5 - 54'1"	50.0 - 164'1"	100	-	30.48
17.0 - 55'9" 17.5 - 57'5"	50.5 - 165'9" 51.0 - 167'4"	105	-	32.00
18.0 - 59'1"	51.5 - 168'11"	110		33.53
18.5 - 60'8"	52.0 - 170'7"	115		35.05
19.0 - 62'3"	52.5 - 172'3"	120		
19.5 - 63'11"	53.0 - 173'10"			36.58
20.0 - 65'7" 20.5 - 67'3"	53.5 - 175'6" 54.0 - 177'2"	125		38.10
21.0 - 68'11"	54.5 - 178'10"	130		39.62
21.5 - 70'7"	55.0 - 180'6"	135	-	41.15
22.0 - 72'2"	55.5 - 182'1"	140	-	42.67
22.5 - 73'9"	56.0 - 183'9"	145	-	44.20
23.0 - 75'6" 23.5 - 77'1"	56.6 - 185'4" 57.0 - 187'0"	150	-	45.72
24.0 - 78'9"	57.0 - 187'0" 57.5 - 188'8"	155	-	47.24
24.5 - 80'4"	58.0 - 190'3"	160	-	48.77
25.0 - 82'0"	58.5 - 191'11"	165	-	50.29
25.5 - 83'7"	59.0 - 193'7"	170	-	51.82
26.0 - 85'3" 26.5 - 86'11"	59.5 - 195'2" 60.0 - 196'9"	175	-	53.34
27.0 - 88'7"	60.5 - 198'6"	180	-	54.86
27.5 - 90'3"	61.0 - 200'1"	185	-	56.39
28.0 - 91'9"	61.5 - 201'9"	190	-	57.91
28.5 - 93'6"	62.0 - 203'5"	195		59.44
29.0 - 95'1" 29.5 - 96'9"	62.5 - 205'0" 63.0 - 206'8"	200		60.96
30.0 - 98'4"	63.5 - 208'3"	205		62.48
30.5 - 100'1"	64.0 - 209'11"	210		64.01
31.0 - 101'10"	64.5 - 211'8"	215		65.53
31.5 - 103'5"	65.0 - 213'3"			
32.0 - 105'0" 32.5 - 106'8"	65.5 - 214'11" 66.0 - 216'6"	220	-	67.06
33.0 - 108'3"	66.5 - 218'3"	225	-	68.58
33.5 - 109'11"	67.0 - 219'10"	230	-	70.10
34.0 - 111'7"	67.5 - 221'6"	235	-	71.63
34.5 - 113'2"	68.0 - 223'1"	240	-	73.15
35.0 - 114'10" 35.5 - 116'6"	68.5 - 224'9" 69.0 - 226'4"	245	-	74.68
36.0 - 118'1"	69.5 - 228'0"	250	-	76.20
36.5 - 119'9"	70.0 - 229'8"	255	-	77.72
37.0 - 121'5"	70.5 - 231'4"	260	-	79.24
37.5 - 123'0"	71.0 - 232'11"	265	-	80.77
38.0 - 124'8" 38.5 - 126'4"	71.5 - 234'7" 72.0 - 236'2"	270	-	82.30
39.0 - 127'11"	72.5 - 237'5	275	-	83.82
	I	-		



PLEASE NOTE:

All technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the full manufacturer specification or equipment user guides.

All information provided is subject to alteration and amendment without prior notice. Please contact Nationwide Platforms for confirmation of machine performance and specification when placing your order.

★ Nationwide Platforms
 A LOXAM Company

NWP 694 V02 - 2021 ©