Powered Access Selection Guide


X Nationwide Platforms

NEXT PAGE

Welcome to our powered access selection guide. Inside you'll find all the information you need to begin working safely and effectively at height.

To get you started we've included comprehensive guidance on our leading product range, as well as advice on the accessories, innovations and training that'll help you succeed on your next task or project.

Remember, if you want to get in touch with us at any point whilst you're browsing, you can give us a call with any enquiries, feedback or hire requests.



0345 745 0000 nationwideplatforms.co.uk

How to navigate through this document

Use these navigation buttons to jump straight to the product range where you'll find the products in ascending height order.



If you can't find exactly what you're looking for or need more information, call our expertly trained staff.

LOW LEVEL **SCISSORS** BOOMS VANS

TRUCK MOUNTED

TRACKED BOOMS

TELE-**HADLERS**

SAFETY,

ATTACHMENTS,

ACCESSORIES

Use this guide to find your perfect powered access solution.

Each section in this guide has been created to allow you to browse, select and order your ideal machine, attachments and accessories.

Information

| Introduction | 1 |
|------------------------|----|
| How to use this guide | 4 |
| Equipment Selection | 5 |
| Location | 6 |
| Safety | 7 |
| Stay connected | 8 |
| iPAF Rental+ | 8 |
| Regulations | 9 |
| Training | 10 |
| Indemnity | 11 |
| Service & Hire Options | 11 |
| Equipment Sales | 12 |

Product Specification

| Low Level Access | 13 |
|--|-----|
| Scissor Lifts | 21 |
| Boom Lifts | 51 |
| Van Mounted | 82 |
| Truck Mounted | 85 |
| Tracked Boom Lifts | 102 |
| Telehandlers | 110 |
| Safety Solutions, Attachments & Accessories | 121 |
| Useful Data | |
| Weight Conversion | 130 |
| Distance Conversion | 130 |

0345 745 0000 nationwideplatforms.co.uk


How to use this guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height.

The working envelope and height/reach indicator will provide a guick visual reference to assist your equipment selection

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on 0345 745 0000



Height and outreach Working Horizontal height outreach

Product Code

Unique reference number for product. (Please note this will not necessarily correspond with the original manufacturer's model number or product code)

Specification

These details include product dimensions. Safe Working Load (SWL), platform area, rotation and machine weight.

3 Kev

These symbols indicate standard features and optional extras available to hire with the platform. See right for key table.

4 Working Envelope

This shows the area of working space provided by the product.

Product Type

Indicates classification of powered access unit. e.g. machine types low level access. scissor lift, boom lift, truck or van mounted platform, specialist boom or telehandler.

6 Alternative Machines

Indicates alternative or similar machines.

7 Working Height


The blue column indicates the safe operating vertical height.

Horizontal Outreach

The grey column indicates the safe operating outreach

Key

Standard features





| Optional extras | | | | SX150 booms |
|-------------------------|----------|----------------------|-----|--|
| | | | | Working Height 48.02m Horizontal 24.38m Outreach Oward leadth 15.18m Cover |
| SkySiren® | | | | |
| SkySiren®PCS™ | MHA | | | Weight 2222ing Reach lettors Ground 0 Prim Operational Full With 5 Allow |
| SkySentry [™] | U | Power to platform | | 00 |
| SkyRak® | ÷ - | | | Working Envoc |
| SkyRakPlus® | | | | M |
| SkyRakBoom® | | | | Mationwide Platforms |
| SkyTel [™] | | | | |
| SkyRakEdge [™] | H | | | |
| | | | | |
| | | | MOC | |

XNationwide Platforms A LOXAM Company

Equipment Selection

Considerations in selecting the right equipment for your task.

Before you get started, it's essential you make sure you have the right training to work safely and legally. Call us to learn more about our training services.

Height & Outreach

Do I need to reach a height straight up or do I need to reach up and then over?

For vertical access, scissor lifts may be best. When working over racking and shelving, mast booms are ideal. When working over obstacles, articulated booms provide a versatile solution.

Environment

Will I be working indoors or outdoors?

Use a zero emission electric machine indoors, and in general a diesel machine outdoors. For versatility, consider a dual fuel unit.

Terrain

What are the ground conditions I'll be working on?

If you're working indoors, consider non-marking tyres. On rough terrain select a four wheel drive option and select outriggers on sloping ground.

0345 745 0000 nationwideplatforms.co.uk

To help you find the ideal machine for your next job; visit our website and use our New to Platforms Selector or call us on 0345 745 0000.



Access

Are there any access restrictions to entering the working environment?

Indoors, will machines pass through doorways and lift shafts? Does the site have plant weight restrictions?

Working height

How far up and how far out do I need to reach?

Always check the working envelope diagrams to ensure the outreach required can be achieved at the height(s) you need to carry out your task. Also consider that maximum working heights are assumed as 2m above the platform height (feet level).



Hire duration

How long do I need a machine for?

Self drive and other vehicle mounted platforms may suit short projects. We offer machine hires from one day to many years, as well as equipment for outright purchase.

Location

Supporting you at every height

With a fleet of more than 15,500 platforms available to hire across the UK, you can be sure that your perfect solution is never too far away.



- 38 local depots across the country
- Dedicated regional customer support
- National technical guidance services

Customer Service Centres
 Operational Depots

SCOTLAND & NORTH EAST

ABERDEEN

Cairnrobin Pipeyard Portlethen Aberdeen AB12 4SB

DUNDEE

6 Faraday Street Dryburgh Industrial Estate, Dundee DD2 3QQ

GLASGOW

Customer Service Centre Tel. 0345 600 1490

Unit B East Point 13 Melford Road Righead Ind Estate Bellshill Glasgow ML4 3LR

GLASGOW CITY

45 Methil Street Glasgow G14 0AG

EDINBURGH

Unit 6D Uphall Business Park Loaning Hill, Broxburn West Lothian EH52 5NT

MIDLANDS & THE NORTH

BARNSLEY

Unit 3 The Recovery Centre Wakefield Rd Barnsley S71 1NU

BIRMINGHAM

Customer Service Centre Tel. 0345 600 1492

Willenhall Road

Darlaston Wednesbury West Midlands WS10 8JG

BLACKBURN

New Trees Garage Myerscough Road Mellor Brook, Blackburn BB2 7LB

DURHAM Customer Service Centre

Tel. 0345 600 1496

Damson Way Dragon Ville Industrial Estate Durham DH1 2YN

LEEDS

Tel. 0345 600 1491

Old Run Road Unit 1, Blackburn Works, Hunslet Leeds LS10 2AA

LEICESTER

Unit 10–11 Arkwright Hill Farm Lutterworth Road (A426) Nr Cosby, LE9 1RH

LIVERPOOL

Knowsley Industrial Estate, Yardley Road Kirkby, Liverpool L33 7SS

NORTH WALES

Castle Close Hawarden Industrial Park, Hawarden, Deeside CH5 3QZ

NOTTINGHAM

Unit 21 Hazelford Way Newstead NG15 0DQ

SCUNTHORPE

7 Atkinson Way Foxhill Industrial Estate, Scunthorpe, DN15 8QJ

STOCKTON ON TEES

1 Hurricane Court Stockton-on-Tees TS18 3TL

0345 745 0000 nationwideplatforms.co.uk

Location

Safety

WARRINGTON Customer

Service Centre Tel. 0345 600 1491

Unit D, Appleton Industrial Park Barleycastle Lane Appleton Thorn Warrington WA4 4QT

WELLINGBOROUGH

Sidegate Lane Wellingborough Northants **NN8 1RN**

SOUTH WEST & SOUTH **WALES**

AVONMOUTH

Victoria Road Avonmouth Bristol **BS11 9DB**

DIDCOT

Hawksworth Industrial Estate Didcot, Oxfordshire **OX11 7HR**

BRISTOL

Customer Service Centre Tel. 0345 600 1494

Cumberland House Ashton Gate Marsh Road. Bristol **BS3 2NA**

CARDIFF Tel. 0345 600 1494

Castle Works East Moors Road Cardiff **CF24 5NN**

LISKEARD Customer Service Centre

Tel. 0345 600 1495

Moorswater Industrial Estate, Liskeard Cornwall PL14 4LB

SWANSEA

Unit 8 RVB Park Carnffrwdd Wav Enterprise Park Swansea SA6 80D

SOUTHAMPTON

Clavlands Road Industrial Estate **Bishops Waltham** SO32 1BH

TAUNTON

Venture Way Priorswood Industrial Estate, Taunton Somerset TA2 8DE

Customer

Service Centre Tel. 01582 578074

Sundon Park Ind Estate Luton LU3 3HP

NORWICH

Rookery Farm Silver Street, Besthorpe Norwich NR17 2LD

0345 745 0000 nationwideplatforms.co.uk

SOUTH EAST

BRENTWOOD

Childerditch Industrial Park Childerditch Hall Drive, Brentwood CM13 3HD

KENT

Plot 1, Thameside Terminal, Cliffe Nr Rochester Kent ME3 7SU

LONDON EAST

Customer Service Centre Tel. 0345 600 1493

6 Oliver Road West Thurrock Essex **RM20 3ED**

LONDON WEST

West London Industrial Park Iver Lane, Cowley, Uxbridge UB8 2JG

LUTON

Unit 12 Dencora Way

Your safety, our priority.

At Nationwide Platforms, safety is always our number one priority.

That's why every single step we take to serve you has been designed with your welfare and wellbeing in mind.

We'd like to invite you to join our safety journey and see why you can always trust our products and services to provide the safeguard you need.



X Nationwide Platforms A LOXAM Company

Stay Connected

IPAF Rental+

For all the latest news, promotions, guidance and more, why not check out our social media channels?



Join us on

LinkedIn.com/NationwidePlatforms



Like us on Facebook.com/NationwidePlatforms



Follow us on Twitter **@NWPlatforms**

Watch our latest videos on YouTube.com/NationwidePlatforms



0345 745 0000 nationwideplatforms.co.uk

IPAF Rental+ provides assurance to customers at every stage of the MEWP hire/rental process.

Known in the industry as the independent quality mark for powered access hire companies, IPAF Rental+ is awarded to those who meet the most stringent standards of training, advice, equipment and customer satisfaction set by a committee of the most experienced players in the powered access rental business.

The Gold standard means Nationwide Platforms has displayed exemplary standards recognised by IPAF as a company who provides significant investment to go above and beyond the minimum standard.



Nationwide Platforms has been awarded with Gold IPAF Rental+

| Rental | 1- |
|--|-----------------|
| REACHING NEW HER | |
| Their factor controls that | |
| Nationwide Platform | s Litil |
| New New examined and certified as compli- location & soften, spatials and processories of the PMU Restar- granting marking the | kal shandar-ter |
| OOLD | |
| tegen (della manar tem ettegen scattern | - |
| IPAE | SS |

THE HIGHEST STANDARD IN POWERED ACCESS EQUIPMENT HIRE

Regulations

Knowing your requirements

If you're working at height, it's important to understand the legislation and regulations which apply to you.

The Work at Height Regulations (2005) apply to all work at height where there is a risk of a fall liable to cause personal injury. These regulations are a key starting point for anyone responsible for individuals completing, supervising or planning work at height.

-The Work at Height Regulations 2005 (as amended)

The selection and manage elevating work platforms

| ISE information sheet | Construction b |
|--|---|
| ntroduction | The Provision and Provisions 1998 |
| The information street is among at those exponential or selecting, specifying and managing-mobile reading work pattorine. Mittinfly on last and should an enal allorgaped Preventing Stati Non Societ type racide selecting work pattorine. ¹ | regarding equipment a and Part II of PON managing the own mobile work equip particularly relevan conditions that the |
| Mit you what you should consider before seecting MITTP to gain access to work at height and the relea. Not need to be managed write the MITMP is in use. | and how it will be reperce. |
| N types of MIWPs are covered by this guidance, soluting ones that are | The Lifting Operating Regulations, 1998, used for lifting or I been despited to |
| vertical scalars' III; set-propeted boom; vertice-mounted boom; and | booughty manuf |
| setule-mouthed boom. | Assessing the |
| The influence of the base produced in constraints with the biservalural Provential Access indexation List (PAP), the Construction Plant free accession and the Briter Constructional Streework facciation and the Briter Constructional Streework facciation. | Million are noted working patterns height to explore considered to be a Elis mondant for |
| What the law requires | understand the re METP and take a |
| The Work at Height Regulations 2008 require an essentient to be carried out before starting any work. | control those rates operation and the |
| I height. If the assessment says that the work can be arred out in a way that avoids taking someone solving at height then this must be done. | you with your pair |
| lawyer, I be assessment sorthrow that there is no | Selection or8 |
| denative to working at height then the work must be roperly planned and organised in advance by a ompetient person to make size that the most sublate | There are second selection, w |
| rok equipment is choser, being into account the abuse of the work. | Before you decide suitable for the pit not exhaustives |
| then choosing the most subsidie work equipment, our must fallow the fail protection freewarky. This | · Wetwork re- |

0345 745 0000 nationwideplatforms.co.uk

181 **X**Nationwide Platforms A LOXAM Company

To help you work efficiently and safely at height Nationwide Platforms has a range of in depth guidance notes to aid understanding and implementation of best practice in the work place.

These useful and informative guides are available on request.

S IPAR --

Training



With more IPAF instructors, training centres and experience in delivering courses than anyone else, you can rely on us to get you trained and ready to work safely on your next project.

Our IPAF Operator courses are available to complete at training centres across the UK and can even be held on your own site.



IPAF Operator Courses

Our complete range of training courses are ideal for anyone looking for advanced or specialist training.

Our additional range of training for powered access users includes:

IPAF MEWPs for Managers

The essential one day course for individuals managing, supervising or planning work at height



We also offer a complete range of courses accredited and approved by:



Indemnity

Service & Hire Options

PowerGuard

All our machines and equipment is hired out under the Construction Plant Hire Association Model Conditions for hiring of plant (July 2011). These terms and conditions place the responsibility on the hirer for any loss or damage of the equipment hired.

With the cost of loss and damage potentially running into thousands of pounds, PowerGuard offers a peace of mind indemnity to our hire customers.

Two levels of PowerGuard are available: Gold (damage only) and Platinum (damage and loss).*

Protect yourself against costs of machine damage or loss

handrail £2,500 Controller £600 Cage £3,000 engine £7,000 battery £1,800 tyres £1,000

For more information on the advantages of our PowerGuard scheme or to add PowerGuard to your account, contact us on **0345 745 0000**.

*Subject to terms & conditions.

Whatever you're looking to achieve, we're proud to offer you a range of flexible hire & maintenance options.

Long term hire

In addition to our daily, weekly and monthly hire options, we can also offer long term agreements ideal for ongoing maintenance tasks and large projects.

Suitable for:

- · Warehouse and logistics applications
- · Long term maintenance and refurbishment projects
- Day to day facilities management tasks in retail, office, commercial and arena settings

Technical & maintenance services

In addition to providing adaptable maintenance packages for short and long term hires, we can also offer you technical support in managing your own fleet requirements.

For professional advice & guidance in selecting the most suitable solution for your needs contact us today




Equipment Sales

The UK's widest selection of new and used access platforms is available to buy now from Nationwide Platforms.

Whether you're seeking a unit from our leading fleet or looking for a brand new model direct from the manufacturer, we have the resources, expertise and know-how to find your perfect solution. We are also refurbishing units out of the fleet.

What's more, we also offer a range of finance and servicing packages.



For for information please call $0808\ 100\ 3604$

or visit our website... nationwideplatforms.co.uk



Low Level Access



0345 745 0000 nationwideplatforms.co.uk

- More than 1,000 units available to hire across the UK
- Working heights up to 9.5m
- Lightweight models from 180kg
- Non-marking tyres for use on finished floors

| Machine type by produ | ct code |
|-----------------------|---------|
| Pecolift | SJ12 |
| NANO | GR15 |
| NANO SP | SJ16 |
| NANO SP+ | GR20 |
| LEONARDO WD | GP20 |
| POWER TOWER | GP25 |
| GR12 | |






Pecolift

low level

Working Height 3.5m

Closed Length Closed Height Closed Width Platform Size Max SWL Weight 0.98m 1.55m 0.75m 0.72m x 0.60m 150kg 180kg Alternative machines NANO Manufacturer POWER TOWERS

Indoor use only



We're also pleased to offer wind rated Pecolift models designed for use outdoors. Contact us today to learn more.

3.5m

0345 745 0000 nationwideplatforms.co.uk

NANO

low level

Alternative

NANO SP


low level

Working Height 4.5m

| Closed Length |
|---------------|
| Closed Height |
| • |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |
| |

1.195m 1.56m 0.75m 1.0m x 0.73m 200kg 285kg machines Nano SP Manufacturer POWER TOWERS

Indoor use only



0345 745 0000 nationwideplatforms.co.uk

Working Height 4.5m

IPAF 3a


| Closed Length |
|------------------------------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Platform Length – deck extended |
| Max SWL |
| Weight |

Batt

4.5m 1.2m 1.59m 0.75m 1.0m x 0.73m 1.5m 200kg 506kg

Alternative machines NANO NANO SP+ Manufacturer

POWER TOWERS





NANO SP+

low level

LEONARDO HD

low level

Working Height 4.5m

| Closed Length | 1.2m |
|------------------------------------|--------------|
| Closed Height | 1.59m |
| Closed Width | 0.75m |
| Platform Size | 1.0m x 0.73m |
| Platform Length – deck extended | 2.0m |
| Max SWL | 200kg |
| Weight | 540kg |
| | |

| Alternative machines |
|----------------------|
| NANO NANO SP |
| Manufacturer |
| POWER TOWERS |

Working Height 4.9m


Batt

 $(\mathbf{O}$


| Closed Length | 1.04m |
|------------------------------------|---------------|
| Closed Height | 1.75m |
| Closed Width | 0.76m |
| Platform Size | 1.04m x 0.63m |
| Platform Length – deck extended | 1.7m |
| Max SWL | 180kg |
| Weight | 555kg |
| | |

Manufacturer Bravi Platforms

fitted with Solo Gyps attachment as standard



XNationwide Platforms A LOXAM Company



0345 745 0000 nationwideplatforms.co.uk

POWER TOWER

low level

Altornativo

GR12

Platform Length

- deck extended Max SWL

Weight

low level


Working Height 5.1m

| Closed Length |
|---------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |

| 0.111 |
|---------------|
| 1.6m |
| 1.92m |
| 0.78m |
| 1.52m x 0.65m |
| 250kg |
| 342kg |

| machines |
|-----------------|
| NANO NANO SP |
| Manufacturer |
| |
| POWER TOWERS |

Indoor use only



0345 745 0000 nationwideplatforms.co.uk


| Working Height | 5.58m | Alternative machines |
|----------------|---------------|-------------------------|
| Closed Length | 1.35m | NANO SP |
| Closed Height | 1.79m | GR15 |
| Closed Width | 0.76m | Manufacturer |
| Platform Size | 0.89m x 0.75m | Genie |

1.35m

227kg

862kg

Indoor use only



X Nationwide Platforms

SJ12

low level

GR15

low level

Alternative

Working Height 5.65m

| Closed Length |
|---------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |
| |

| 5.0511 |
|---------------|
| 1.78m |
| 1.79m |
| 0.77m |
| 0.93m x 0.69m |
| 227kg |
| 863kg |

| Alternative |
|--------------|
| machines |
| GR12 GR15 |
| Manufacturer |
| Skyjack |
| |

| 5 4 3 1 1 A A A A A A A A A A A A A | |
|--|--|
| edoja 3 2 2 | |
| b 2 | |
| | |
| | |
| | |
| | |


0345 745 0000

nationwideplatforms.co.uk

Alternative Working Height 6.62m

| 3 | | machines |
|------------------------------------|---------------|--------------|
| Closed Length | 1.45m | GR20 |
| Closed Height | 1.79m | GR12 |
| Closed Width | 0.76m | NANO SP |
| Platform Size | 0.94m x 0.75m | Manufacturer |
| Platform Length – deck extended | 1.4m | Genie |
| Max SWL | 227kg | |
| Weight | 1141kg | |
| | | |

Indoor use only



X Nationwide Platforms

SJ16

low level

GR20

low level


Working Height 6.75m

| Closed Length |
|---------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |

| • | 0.7 0111 |
|---|---------------|
| | 1.78m |
| | 1.79m |
| | 0.77m |
| | 0.69m x 0.85m |
| | 227kg |
| | 980kg |

| Alternative machines |
|-------------------------|
| GR15 GR20 1230ES |
| Manufacturer |
| Skyjack |
| |


Indoor use only



0345 745 0000 nationwideplatforms.co.uk

| Working Height | 7.85m | Alternative machines |
|------------------------------------|---------------|-------------------------|
| Closed Length | 1.35m | GR15 |
| Closed Height | 1.98m | GS20 |
| Closed Width | 0.8m | 3219 |
| Platform Size | 0.89m x 0.75m | Manufacturer |
| Platform Length – deck extended | 1.4m | Genie |
| Max SWL | 159kg | |
| Weight | 1264kg | |

Indoor use only



X Nationwide Platforms

GP20

low level

GP25

Working Height 8.12m


| Closed Length |
|---------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |

in **f**

| 0.12111 |
|---------------|
| 1.27m |
| 1.98m |
| 0.74m |
| 1.14m x 0.66m |
| 159kg |
| 347kg |

Alternative machines GP25 Manufacturer Genie

Indoor use only



You can find the latest promotions, competitions and news from Nationwide Platforms by following us on our social media pages.

Working Height 9.54m


| Closed Length |
|---------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Max SWL |
| Weight |
| |

1.31m 1.98m 0.74m 1.14m x 0.66m 159kg 330kg Alternative machines GP20 Manufacturer Genie

Indoor use only

9.54m





X Nationwide Platforms

Scissors



0345 745 0000 nationwideplatforms.co.uk

- More than 7,200 units available to hire across the UK
- Working heights from 7m to 34m
- Lightweight and compact machines
- Direct drive electric machines for greater efficiency
- Double deck and rough terrain

- Variety of power options
- Narrow aisle machines for access to confined areas
- Non-marking tyre option for work on finished floors
- · Models with 1,134kg SWL
- Lightweight models
 from 1,269kg
- · Power to platform available

Machine type by product code

| GS1532 | GS2632 | COM12DX | GS53 |
|--------------------------|---------------------------|---------------------------|----------------------------|
| SJ3215 | COM10N | GS4047 | GS53G |
| OPT8 | CO10 | COM14 | 165-12 |
| 3219 | COM10DX | M4069 | 195-12 |
| GS1932 | 6832D | S142-12 | HL220H |
| GS20 | 4632 | 9241 | HL220D |
| 3220 | GS32 | 8841 | S225-24 |
| COM8 | GS3232 | GS43 | SL210 |
| GS26 | GS32D-0 | GS43G | HL235D |
| GS2669RT | GS3369RT | S152-12 | M250 |
| 4626 | COM12 | 9250X | HL275H |
| 6826D | GS33 | LL15N | S280-25 |
| GS26D-O | GS3390RT | S175-12 | LL26X |
| 3226 | GS3390G | H18SX | HL340D |
| 4626 6826D GS26D-O | COM12 GS33 GS3390RT | 9250X LL15N S175-12 | HL275H S280-25 LL26X |

GS1532

scissors

SJ3215


scissors

Alternative

Working Height 6.4m

| Closed Length | 1.83m |
|---------------------------------------|---------------|
| Closed Height | 2.03m |
| Stowed Height (guardrails lowered) | 1.73m |
| Closed Width | 0.81m |
| Platform Size | 1.63m x 0.74m |
| Platform Length (deck extended) | 2.54m |
| Max SWL | 272kg |
| Weight | 1269kg |
| | |

| | Alternative machines |
|---|-------------------------|
| | 3215 3219 GS1932 |
| | Manufacturer |
| ı | Genie |
| | |
| | |




0345 745 0000 nationwideplatforms.co.uk

Working Height 6.57m

| working neight | 0.57111 | machines |
|----------------------|---------------|--------------|
| Closed Length | 1.55m | GS1532 |
| Closed Height | 2.03m | Manufacturer |
| Stowed Height | 1.67m | SkyJack |
| (guardrails lowered) | | ORYOUOR |
| Closed Width | 0.81m | |
| Platform Size | 1.55m x 0.66m | |
| Platform Length | 2.46m | |
| (deck extended) | | |
| Max SWL | 272kg | |
| Weight | 1148kg | |
| | | |





OPT8

scissors

scissors

Alternative machinos

Working Height 7.77m

| • • | |
|---------------------------------------|---------------|
| Closed Length | 1.9m |
| Closed Height | 1.98m |
| Stowed Height (guardrails lowered) | 1.98m |
| Closed Width | 0.79m |
| Platform Size | 0.74m x 1.72m |
| Platform Length (deck extended) | 2.59m |
| Max SWL | 230kg |
| Weight | 1520g |
| | |

| Alternative machines |
|--------------------------|
| 3220 GS1932 GS20 |
| |
| Manufacturer Haulotte |

IPAF 3a


| | _ | | _ | _ | | _ | _ | | |
|---|------------------|---------|---|-------------------|---|-------|-------|--|--|
| | | 10 | | | | | | | |
| | | 10 | | | | | | | |
| | | 9 | | | | | | | |
| | | | | | | | | | |
| | | 8 | | | | | | | |
| | Ð | 7 | | | | | | | |
| | 6 | · · · · | | n | | | | | |
| | ā | 6 | | | | | | | |
| | Σ | 5 | | ∇ | | | | | |
| | E. | 5 | | | | | | | |
| | | 4 | - | \sim | | | | | |
| _ | Ĕ | ' - | | | | | | | |
| E | Y | 3 | | $\mathbf{\nabla}$ | | | | | |
| - | Working Envelope | 2 | | A | | | | | |
| | ž | | | $\mathbf{\nabla}$ | , | | | | |
| | | 1 | | X | | | | | |

0345 745 0000

nationwideplatforms.co.uk

Working Height 7.8m

| | | machines |
|---------------------------------------|---------------|-------------------------|
| Closed Length | 1.78m | GS1932 |
| Closed Height | 2.11m | GS20 |
| Stowed Height (guardrails lowered) | 1.64m | Manufacturer SkyJack |
| Closed Width | 0.81m | SKYJACK |
| Platform Size | 1.63m x 0.71m | |
| Platform Length (deck extended) | 2.53m | |
| Max SWL | 227kg | |
| Weight | 1312kg | |
| | | |



Working Envelope

XNationwide Platforms A LOXAM Company

7.8m

7.77m

Batt

GS1932

scissors

GS20


scissors

Working Height 7.8m

| Closed Length | 1.82m |
|---------------------------------------|---------------|
| Closed Height | 2.11m |
| Stowed Height (guardrails lowered) | 1.76m |
| Closed Width | 0.81m |
| Platform Size | 1.64m x 0.74m |
| Platform Length (deck extended) | 2.54m |
| Max SWL | 227kg |
| Weight | 1503kg |
| | |

| | Alternative machines |
|---|-------------------------|
| | 3219 GS20 3220 |
| | Manufacturer |
| | Genie |
| n | |
| | |
| | |
| | |





0345 745 0000 nationwideplatforms.co.uk

Working Height 7.92m

| | | mach |
|---------------------------------------|--------------|----------------------|
| Closed Length | 2.45m | 3220 |
| Closed Height | 2.1m | COM |
| Stowed Height (guardrails lowered) | 1.75m | Manu Genie |
| Closed Width | 0.81m | Genie |
| Platform Size | 2.21m x 0.7m | |
| Platform Length (deck extended) | 3.2m | |
| Max SWL | 363kg | |
| Weight | 1559kg | |
| | | |





8 7 6 Working Envelope 5 3 7.92m 2 0 1 2 3 5 6 7 8

3220

1

0

2 3

scissors

10

COM8


scissors

Alternative machines

Working Height 8.1m

| Closed Length | 2.32m |
|------------------------------------|---------|
| Closed Height | 2.08m |
| Stowed Height (guardrails lowered) | 1.73m |
| Closed Width | 0.81m |
| Platform Size | 2.13m x |
| Platform Length (deck extended) | 3.04m |
| Max SWL | 408kg |
| Weight | 1594kg |
| | |

| | Alternative machines |
|-------|-------------------------|
| | GS20 2030ES |
| | Manufacturer SkyJack |
| 0.71m | |
| | |
| | |



5 6 7 8 9

4


0345 745 0000

nationwideplatforms.co.uk

Working Height 8.2m

| | machines |
|---------------|---|
| 2.49m | GS26 |
| 2.0m | GS2632 |
| 1.13m | 3226 |
| | Manufacturer |
| 0.81m | Haulotte |
| 0.81m x 2.31m | |
| 3.23m | |
| | |
| 350kg | |
| 1655kg | |
| | 2.0m 1.13m 0.81m 0.81m x 2.31m 3.23m 350kg |





XNationwide Platforms A LOXAM Company

GS26

scissors

Alternative

Manufacturer

machines

4626

Genie


GS2669RT

scissors

Working Height 9.75m

| Closed Length | 2.45 |
|---------------------------------------|------|
| Closed Height | 2.17 |
| Stowed Height (guardrails lowered) | 1.99 |
| Closed Width | 1.17 |
| Platform Size | 2.21 |
| Platform Length (deck extended) | 3.2m |
| Max SWL | 454k |
| Weight | 2107 |
| | |

| ./ 5ጠ | |
|-----------------------------|--|
| .45m | |
| .17m | |
| .99m | |
| .17m .21m x 0.94m .2m | |
| 54kg | |
| 107kg | |
| | |




0345 745 0000 nationwideplatforms.co.uk

| Working | Height | 9.9m |
|---------|--------|------|
| - J | | |

| Closed Length | 3.12m | (|
|---------------------------------------|--------------|---|
| Closed Height | 2.59m | 6 |
| Stowed Height (guardrails lowered) | 1.92m | 1 |
| Closed Width | 1.75m | |
| Platform Size | 2.79m x 1.6m | |
| Platform Length (deck extended) | 4.5m | |
| Max SWL | 680kg | |
| Weight | 3768kg | |
| | | |





4626

9.9m

scissors

6826D


scissors


Alternative

Working Height 9.9

| - | - |
|------------------------------------|---------|
| Closed Length | 2.31m |
| Closed Height | 2.15m |
| Stowed Height (guardrails lowered) | 1.79m |
| Closed Width | 1.17m |
| Platform Size | 2.11m > |
| Platform Length (deck extended) | 3.01m |
| Max SWL | 454kg |
| Weight | 2130kg |
| | |

| 9m | Alternative machines |
|------------------------|-------------------------|
| 1m | GS26 |
| 5m 9m | Manufacturer SkyJack |
| 7m 1m x 1.07m 1m | |
| lkg 30ka | |






0345 745 0000

nationwideplatforms.co.uk

Working Height 9.92m

| working neight | 9.92111 | machines |
|------------------------------------|---------------|--------------|
| Closed Length | 3.12m | GS26D |
| Closed Height | 2.37m | GS26D-O |
| Stowed Height (guardrails lowered) | 1.61m | Manufacturer |
| Closed Width | 1.72m | SkyJack |
| Platform Size | 2.44m x 1.42m | |
| Platform Length (deck extended) | 3.94m | |
| Max SWL | 567kg | |
| Weight | 3305kg | |
| | | |





XNationwide Platforms A LOXAM Company

GS26D-O

scissors

3226


scissors

Working Height 9.92m

| 2.67m |
|---------------|
| 2.35m |
| 1.7m |
| 1.73m |
| 2.51m x 1.55i |
| 3.96m |
| 567kg |
| 3455kg |
| |

| Alternative machines |
|-------------------------|
| GS26D 6826D |
| Manufacturer |
| Genie |
| |
| |






0345 745 0000 nationwideplatforms.co.uk

| Working Height | 9.92m | Alternative machines |
|------------------------------------|---------------|-------------------------|
| Closed Length | 2.32m | GS2632 |
| Closed Height | 2.15m | Manufacturer |
| Stowed Height (guardrails lowered) | 1.91m | SkyJack |
| Closed Width | 0.81m | |
| Platform Size | 2.13m x 0.71m | |
| Platform Length (deck extended) | 3.23m | |
| Max SWL | 227kg | |
| Weight | 1890kg | Indeer use end |

Indoor use only



GS2632

scissors

COM10N


scissors

Working Height 9.92m

| • • | | machin |
|---------------------------------------|---------------|----------|
| Closed Length | 2.44m | 3226 |
| Closed Height | 2.26m | 2630 |
| Stowed Height (guardrails lowered) | 1.91m | Manufa |
| Closed Width | 0.81m | Genie |
| Platform Size | 2.26m x 0.79m | |
| Platform Length (deck extended) | 3.18m | |
| Max SWL | 227kg | |
| Weight | 1956kg | Indoor u |

| Alternative |
|--------------|
| machines |
| 3226 |
| 2630 |
| Manufacturer |
| Genie |
| |
| |
| |
| |


Indoor use only



0345 745 0000 nationwideplatforms.co.uk

| Working Height | 10.0m | Alternative machines |
|---------------------------------------|---------------|--------------------------|
| Closed Length | 2.49m | GS2632 |
| Closed Height | 2.18m | 3226 |
| Stowed Height (guardrails lowered) | 1.32m | Manufacturer Haulotte |
| Closed Width | 0.81m | Haulotte |
| Platform Size | 0.81m x 2.31m | |
| Platform Length (deck extended) | 3.23m | |
| Max SWL | 230kg | |
| Weight | 2190kg | |

Indoor use only



Solutionwide Platforms

COM10

scissors

COM10DX


scissors

Working Height 10.15m

| Closed Length | 2.31m |
|---------------------------------------|--------------|
| Closed Height | 2.14m |
| Stowed Height (guardrails lowered) | 1.28m |
| Closed Width | 1.2m |
| Platform Size | 2.31m x 1.2m |
| Platform Length (deck extended) | 3.23m |
| Max SWL | 450kg |
| Weight | 2330kg |
| | |

| | Alternative machines |
|---|--------------------------|
| | GS2632 3226 COM10N |
| | Manufacturer |
| | Haulotte |
| 1 | |






0345 745 0000 nationwideplatforms.co.uk

| Working | Height | 10.3m |
|---------|--------|-------|
|---------|--------|-------|

| Closed Length | 3.17m |
|------------------------------------|---------------|
| Closed Height | 2.44m |
| Stowed Height (guardrails lowered) | 1.59m |
| Closed Width | 1.78m |
| Platform Size | 2.45m x 1.45m |
| Platform Length (deck extended) | 3.7m |
| Max SWL | 565kg |
| Weight | 3520kg |



Alternative machines GS26D 6826D Manufacturer Haulotte



XNationwide Platforms A LOXAM Company

6832D

scissors

4632


scissors

Working Height 11.75m

| - | - |
|------------------------------------|---------------|
| Closed Length | 3.12m |
| Closed Height | 2.51m |
| Stowed Height (guardrails lowered) | 1.75m |
| Closed Width | 1.72m |
| Platform Size | 2.44m x 1.42m |
| Platform Length (deck extended) | 3.94m |
| Max SWL | 454kg |
| Weight | 3655kg |


| | Alternative machines |
|---|-------------------------|
| | GS32D GS32D-O |
| | Manufacturer |
| | SkyJack |
| I | |
| | |





0345 745 0000 nationwideplatforms.co.uk

| Working Height | 11.75m | Alternative machines |
|---------------------------------------|---------------|-------------------------|
| Closed Length | 2.31m | GS32 |
| Closed Height | 2.24m | 3246 |
| Stowed Height (guardrails lowered) | 1.88m | Manufacturer |
| Closed Width | 1.17m | SkyJack |
| Platform Size | 2.11m x 1.07m | |
| Platform Length (deck extended) | 3.01m | |
| Max SWL | 317kg | |
| Weight | 2300kg | |



GS32

scissors

GS3232

Weight


scissors

Working Height 11.75m

| • • | |
|------------------------------------|-----------|
| Closed Length | 2.43m |
| Closed Height | 2.3m |
| Stowed Height (guardrails lowered) | 1.8m |
| Closed Width | 1.17m |
| Platform Size | 2.26m x 1 |
| Platform Length (deck extended) | 3.25m |
| Max SWL | 318kg |
| Weight | 2796kg |
| | |

| n | Alternative machines |
|-------|-------------------------|
| | 4632 |
| | 3246 |
| | Manufacturer |
| | Genie |
| l.16m | |
| | |
| | |
| | |

Batt 🛞 1-2 📅 🖬 IPAF 3a




0345 745 0000 nationwideplatforms.co.uk

| Working Height | 11.75m | Alternative machines |
|---------------------------------------|---------------|-------------------------|
| Closed Length | 2.44m | GS32 |
| Closed Height | 2.44m | Manufacturer |
| Stowed Height (guardrails lowered) | 2.03m | Genie |
| Closed Width | 0.81m | |
| Platform Size | 2.26m x 0.81m | |
| Platform Length (deck extended) | 3.33m | |
| Max SWL | 227kg | |
| | | |

2352kg

Indoor use only



X Nationwide Platforms



GS32D-O


scissors

Working Height 11.8m

| .67m |
|-------------|
| 45m |
| 83m |
| 73m |
| 51m x 1.55m |
| 96m |
| 54kg |
| 115kg |
| |



Alternative machines 6832D Manufacturer Genie



0345 745 0000 nationwideplatforms.co.uk

Solution Wide Platforms

GS3369RT

scissors

COM12


scissors

Working Height 11.96m

| Closed Length | 3 12m |
|----------------------|--------------|
| 6 | •••= |
| Closed Height | 2.59m |
| Stowed Height | 1.92m |
| (guardrails lowered) | |
| Closed Width | 1.75m |
| Platform Size | 2.79m x 1.6m |
| Platform Length | |
| (deck extended) | 4.5m |
| Max SWL | 454kg |
| Weight | 3949kg |

| Alternative machines |
|-------------------------|
| 6832D |
| Manufacturer |
| manaraotaroi |
| Genie |

A 14 - ---- - 41- ---




0345 745 0000 nationwideplatforms.co.uk

Working Height 12.0m

| Closed Length | 2.49m | 1 |
|---------------------------------------|--------------|---|
| Closed Height | 2.39m | 4 |
| Stowed Height (guardrails lowered) | 1.53m | |
| Closed Width | 1.2m | 1 |
| Platform Size | 1.2m x 2.31m | |
| Platform Length (deck extended) | 3.23m | |
| Max SWL | 300kg | |
| Weight | 2470g | |
| | | |





X Nationwide Platforms

GS33

scissors

GS3390RT

scissors


Alternative

machines

Working Height 12.06m

| • • | | ma |
|---------------------------------------|---------------|-----------|
| Closed Length | 4.88m | GS |
| Closed Height | 2.68m | GS |
| Stowed Height (guardrails lowered) | 2.0m | 683 GS |
| Closed Width | 2.13m | Ма |
| Platform Size | 3.89m x 1.83m | Ge |
| Platform Length (deck extended) | 6.57m | |
| Max SWL | 1134kg | |
| Weight | 7520kg | |
| | | |

| ו | Alternative machines |
|-----|---------------------------------------|
| | GS3390RT GS43 6832D GS3369RT |
| | Manufacturer |
| 33m | Genie |
| | |
| | |




One day of powered access training, years of working safely at height. Call today and get trained with Nationwide Platforms. Call: 0345 745 0000

| Working | Height | 12.06m |
|---------|--------|--------|
|---------|--------|--------|

| Closed Length | 4.88m | GS33 |
|---------------------------------------|---------------|-------------------|
| Closed Height | 2.71m | GS43 |
| Stowed Height (guardrails lowered) | 2.03m | 6832D GS3369RT |
| Closed Width | 2.29m | Manufacturer |
| Platform Size | 4.81m x 1.83m | Genie |
| Platform Length (deck extended) | 7.38m | |
| Max SWL | 1134kg | |
| Weight | 6890kg | |





GS3390G

scissors

COM12DX


scissors

Alternative

Working Height 12.06m

| Closed Length | 4.88m |
|---------------------------------------|-------------|
| Closed Height | 2.71m |
| Stowed Height (guardrails lowered) | 2.03m |
| Closed Width | 2.29m |
| Platform Size | 4.81m x 1.8 |
| Platform Length (deck extended) | 7.38m |
| Max SWL | 1134kg |
| Weight | 6826kg |
| | |

| n | Alternative machines |
|------|-------------------------|
| | GS43G GS53G |
| | Manufacturer |
| | Genie |
| .83m | |
| | |




0345 745 0000

nationwideplatforms.co.uk

Working Height 12.06m

| working Height | 12.00111 | machines |
|---------------------------------------|---------------|--------------|
| Closed Length | 3.17m | GS3369RT |
| Closed Height | 2.56m | GS32D-O |
| Stowed Height (guardrails lowered) | 1.7m | Manufacturer |
| Closed Width | 1.78m | Haulotte |
| Platform Size | 1.78m x 2.45m | |
| Platform Length (deck extended) | 3.7m | |
| Max SWL | 450kg | |
| Weight | 4110kg | |
| | | |





X Nationwide Platforms

.....

GS4047

(quardrails lowered)

Closed Width

Platform Size

Max SWL

Weight

Platform Length

(deck extended)

scissors

COM14

scissors

| Working Height | 13.7m |
|----------------|-------|
| Closed Length | 2.44m |
| Closed Height | 2.54m |
| Stowed Height | |

1

1


2

3

3


3

| l3.7m | Alternative machines |
|--------------------------------------|-----------------------------|
| .44m .54m | COM14 S142-12 S152-12 |
| .88m .19m .26m x 1.15m .36m | Manufacturer Genie |
| 50kg 221kg | Indoor use only |

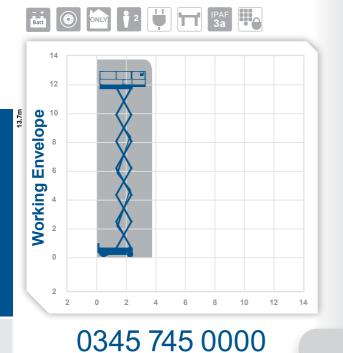

nationwideplatforms.co.uk

Alternative **Working Height** 13.8m machines Closed Length 2.74m LL15N S142-12 **Closed Height** 2.5m S152-12 Stowed Height 2.08m (quardrails lowered) Manufacturer Closed Width 1 2m Haulotte Platform Size 2 3m x 1 2m Platform Length 3.22m (deck extended) Max SWL 350kg Weight 3175ka Indoor use only



XNationwide Platforms A LOXAM Company

M4069

scissors


S142-12

scissors

Working Height 14.19m

| 3.1m |
|---------|
| 2.83m |
| 2.01m |
| 1.75m |
| 2.92m x |
| 3.83m |
| 360kg |
| 5700kg |
| |


| 9m | Alternative machines |
|---------|-------------------------|
| | 4069 4069-O |
| | Manufacturer JLG |
| (1.65m | |
| | |
| | |



0345 745 0000 nationwideplatforms.co.uk

| Working Height | 14.2m | Alternative machines |
|---------------------------------|-------------|-------------------------|
| Closed Length | 2.71m | S152-12 |
| Closed Height | 2.76m | COM14 |
| Stowed Height | 1.98m | GS4047 |
| (guardrails lowered) | | Manufacturer |
| Closed Width | 1.2m | HAB |
| Platform Size | 2.5m x 1.2m | |
| Platform Length (deck extended) | 3.7m | |
| Max SWL | 350kg | |
| Weight | 3400kg | |

Indoor use only



X Nationwide Platforms

9241

scissors

8841


scissors

Working Height 14.5m

| 4.5m |
|-----------|
| 2.8m |
| 2.0m |
| 2.3m |
| 4.30m x 1 |
| 7.2m |
| 681kg |
| 6715kg |
| |

| ו | Alternative machines |
|-------|-------------------------|
| | 8841 GS43 |
| | Manufacturer |
| | SkyJack |
| 1.90m | |
| | |
| | |





0345 745 0000


nationwideplatforms.co.uk

Working Height 14.5m

| | | machine |
|---------------------------------------|---------------|---------------------|
| Closed Length | 3.49m | 9241 |
| Closed Height | 2.9m | GS43 |
| Stowed Height (guardrails lowered) | 2.22m | Manufact SkyJack |
| Closed Width | 2.21m | SkyJack |
| Platform Size | 3.51m x 1.76m | |
| Platform Length (deck extended) | 4.71m | |
| Max SWL | 680kg | |
| Weight | 5289kg | |
| | | |



Alternative



XNationwide Platforms A LOXAM Company

39

14.5m

GS43

scissors


GS43G

scissors

Working Height 15.1m

| - |
|---------------|
| 4.88m |
| 2.93m |
| 2.25m |
| 2.29m |
| 4.81m x 1.83m |
| 7.38m |
| 680kg |
| 7323kg |
| |

| Alternative machines |
|-------------------------|
| 8841 9241 GS53 |
| Manufacturer Genie |
| |
| |
| |




0345 745 0000 nationwideplatforms.co.uk

Working Height 15.1m

| | | Inac |
|---------------------------------------|---------------|------|
| Closed Length | 4.88m | GS5 |
| Closed Height | 2.93m | Man |
| Stowed Height (guardrails lowered) | 2.25m | Geni |
| Closed Width | 2.29m | |
| Platform Size | 4.81m x 1.83m | |
| Platform Length (deck extended) | 7.38m | |
| Max SWL | 680kg | |
| Weight | 7323kg | |
| | | |

Alternative machines GS53G Manufacturer Genie



...

S152-12

scissors

9250X

scissors

Alternative machines


Working Height 15.2m

| • • | |
|---------------------------------------|---------------|
| Closed Length | 3.35m |
| Closed Height | 3.0m |
| Stowed Height (guardrails lowered) | 2.25m |
| Closed Width | 1.19m |
| Platform Size | 3.04m x 1.18m |
| Platform Length (deck extended) | 4.24m |
| Max SWL | 500kg |
| Weight | 4700kg |

| | Alternative |
|---|-------------------------------------|
| | LL15N GS4047 COM14 S142-12 |
| | Manufacturer |
| n | HAB |
| | Indoor use onl |

1. A 14 - ---- - A1- --

Indoor use only




0345 745 0000 nationwideplatforms.co.uk

| Working Height | 17.2m |
|----------------|-------|
| Closed Length | 4.47m |

| Closed Length | 4.47m | 9250X-O |
|---------------------------------------|---------------|-------------------------|
| Closed Height | 3.16m | GS53 |
| Stowed Height (guardrails lowered) | 2.29m | Manufacturer SkyJack |
| Closed Width | 2.34m | SKYJACK |
| Platform Size | 4.27m x 1.88m | |
| Platform Length (deck extended) | 7.2m | |
| Max SWL | 681kg | |
| Weight | 7395kg | |
| | | |





17.2m

LL15N

scissors

S175-12

scissors

Alternative machines


Working Height 17.3m

| • • | | i ma |
|---------------------------------------|-------------|-------------|
| Closed Length | 4.12m | S1! |
| Closed Height | 3.3m | S1 |
| Stowed Height (guardrails lowered) | 2.55m | 168 LL* |
| Closed Width | 1.22m | Ma |
| Platform Size | 3.9m x 1.2m | Lift |
| Platform Length (deck extended) | 5.4m | |
| Max SWL | 500kg | |
| Weight | 7600kg | Ind |

| rer | |
|-----|-----|
| | |
| | |
| | |
| | - 1 |
| | |

Altornativo

Indoor use only



0345 745 0000

nationwideplatforms.co.uk

Working Height 17.5m

| Closed Length | 3.34m | LL15N |
|---------------------------------|---------------|-----------------|
| Closed Height | 3.15m | S175-12 |
| Stowed Height | 2.38m | 165-12 |
| (guardrails lowered) | | Manufacturer |
| Closed Width | 1.19m | HAB |
| Platform Size | 3.04m x 1.18m | |
| Platform Length (deck extended) | 4.25m | |
| Max SWL | 500kg | |
| Weight | 5350kg | |
| - | Ū | Indoor use only |

X Nationwide Platforms

17.5m

H18SX

scissors

GS53

Closed Length

Closed Height

.

Working Height

scissors

Alternative

Manufacturer Genie

machines

LL20X

9250X


9250

Working Height 18

| Closed Length | 5.3m |
|---------------------------------------|-------|
| Closed Height | 2.99 |
| Stowed Height (guardrails lowered) | 2.11ı |
| Closed Width | 2.25 |
| Platform Size | 1.89 |
| Platform Length (deck extended) | 7.3m |
| Max SWL | 500k |
| Weight | 7360 |
| | |

| 8.0m | Alternative machines |
|-------------------------|--------------------------|
| 3m | GS53 |
| 99m I1m | Manufacturer Haulotte |
| 25m 39m x 5.3m 3m | |
| 0kg 60g | |





0345 745 0000

nationwideplatforms.co.uk

| (guardrails lowered) | 2.47m |
|---------------------------------|---------------|
| Closed Width | 2.29m |
| Platform Size | 4.81m x 1.83m |
| Platform Length (deck extended) | 7.38m |
| Max SWL | 680kg |
| Weight | 8050kg |




18.15m

4.88m

3.15m

~ ----



XNationwide Platforms A LOXAM Company

GS53G

scissors


165-12

scissors

Working Height 18.2m

| 3.98m |
|------------|
| 3.15m |
| 2.47m |
| 2.29m |
| 4.81m x 1. |
| 7.38m |
| 680kg |
| 9541kg |
| |


| | Alternative machines |
|------|----------------------|
| | GS43G |
| | Manufacturer |
| | Genie |
| | |
| .83m | |



0345 745 0000 nationwideplatforms.co.uk

| Working Height | 18.5m | Alternative machines |
|---------------------------------------|---------------|-------------------------|
| Closed Length | 3.74m | LL15N |
| Closed Height | 3.4m | S175-12 |
| Stowed Height (guardrails lowered) | 2.65m | 180-12 LL15N |
| Closed Width | 1.2m | Manufacturer |
| Platform Size | 3.38m x 1.16m | Holland Lift |
| Platform Length (deck extended) | 4.88m | |
| Max SWL | 500kg | |
| Weight | 7985kg | |

Indoor use only



XNationwide Platforms A LOXAM Company



195-12

scissors


Working Height 21.4m

| | | maomm |
|---------------------------------------|---------------|---------|
| Closed Length | 3.74m | SL180N |
| Closed Height | 3.74m | Manufa |
| Stowed Height (guardrails lowered) | 3.01m) | Holland |
| Closed Width | 1.20m | |
| Platform Size | 3.38m x 1.16m | |
| Platform Length (deck extended) | 4.88m | |
| Max SWL | 500kg | |
| Weight | 9120kg | Indoor |
| | | |

Alternative machines SL180N Manufacturer Holland Lift

Indoor use only

21.4



0345 745 0000 nationwideplatforms.co.uk

X Nationwide Platforms

HL220H

(

21.7m

scissors

Alternative

a a la lua a a


HL220D

scissors

Alternative

machines

| • | | machines |
|---------------------------------------|---------------|------------------------|
| Closed Length | 4.84m | HL220D |
| Closed Height | 3.65m | HL235D |
| Stowed Height (guardrails lowered) | 2.88m | S225 LL20X SL210 |
| Closed Width | 2.44m | SL245 |
| Platform Size | 2.30m x 4.50m | Manufacturer |
| Platform Length | 7.0m | |
| (deck extended) | 7.011 | Holland Lift |
| Max SWL | 750kg | |
| Weight | 13900g | |




0345 745 0000

nationwideplatforms.co.uk

Working Height 21.9m

| | | machines |
|---------------------------------------|---------------|-----------------|
| Closed Length | 4.84m | LL20X |
| Closed Height | 3.65m | LL26X |
| Stowed Height (guardrails lowered) | 2.88m | HL235D SL210 |
| Closed Width | 2.44m | Manufacturer |
| Platform Size | 4.50m X 2.30m | Holland Lift |
| Platform Length (deck extended) | 7.0m | |
| Max SWL | 750kg | |
| Weight | 12140kg | |
| | | |





X Nationwide Platforms

21.9m

S225-24

scissors

SL210


scissors

Working Height 22.5m

| - | - |
|---------------------------------------|----------|
| Closed Length | 4.84m |
| Closed Height | 3.72m |
| Stowed Height (guardrails lowered) | 2.88m |
| Closed Width | 2.39m |
| Platform Size | 4.5m x 2 |
| Platform Length (deck extended) | 7.2m |
| Max SWL | 750kg |
| រត្ត Weight ដ | 11000kg |

| m | Alternative machines |
|-------|------------------------------------|
| | LL20X LL26X HL220D HL235D |
| | Manufacturer |
| 2.36m | HAB |
| | |
| | |
| 2.36m | HL235D Manufacturer |






0345 745 0000 nationwideplatforms.co.uk

| Working Height | 23.0m | Alternative machines |
|---------------------------------------|---------------|-------------------------|
| Closed Length | 5.75m | LL20X |
| Closed Height | 4.1m | HL220D |
| Stowed Height (guardrails lowered) | 3.2m | HL235D S225-24 |
| Closed Width | 2.5m | Manufacturer |
| Platform Size | 5.35m x 2.50m | Liftlux |
| Platform Length (deck extended) | 7.55m | |
| Max SWL | 1000kg | |
| Weight | 15000kg | |





X Nationwide Platforms

HL235D

scissors

Alternative

M250

scissors

Alternative

Working Height 23.2m

| | | 23.2111 | machines |
|-------|------------------------------------|---------------|-----------------|
| | Closed Length | 5.75m | LL20X |
| | Closed Height | 4.01m | S225-24 |
| | Stowed Height (guardrails lowered) | 3.1m | SL210 HL220D |
| | Closed Width | 2.49m | Manufacturer |
| | Platform Size | 5.22m x 2.40m | Holland Lift |
| | Platform Length (deck extended) | 7.32m | |
| Ę | Max SWL | 1000kg | |
| 23.2m | Weight | 18100kg | |
| | | | |

| D | R | T ⁴ | ٢ | | i 4 | | 1 | | | | + | | ÷ | IP/ 3 | AF a |
|------------------|----|----------------|----|----|------------|--------------|---|---|----|----|----|----|----|----------|---------|
| | 24 | | | | | | | | | | | | | | |
| | 22 | | ſE | | | | | | | | | | | | - 1 |
| | 20 | | | + | | V | | | | | | | | | - 1 |
| Ø | 18 | | | | | Å | | | | | | | | | - 1 |
| Working Envelope | 16 | | | | | \checkmark | | | | | | | | | - 1 |
| <u>e</u> | 14 | | | | | Å | | | | | | | | | - 1 |
| Ē | 12 | | | | | \checkmark | | | | | | | | | - 1 |
| <u>Б</u> | 10 | | | | | Å | | | | | | | | | - 1 |
| Ū. | 8 | | | | | V | | | | | | | | | - 1 |
| Ť. | 6 | | | | | Ą | | | | | | | | | - 1 |
| Š | 4 | | | | | V | | | | | | | | | - 1 |
| | 2 | | | | | | | | | | | | | | |
| | 0 | | | 10 | - | _(0) | | | | | | | | | |
| | 2 | | | | | | | | | | | | | | |
| | | 4 | 2 | 0 | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 |


0345 745 0000

nationwideplatforms.co.uk

Working Height 27.0m

| working neight | 27.011 | machines |
|---------------------------------------|--------------|------------------------------|
| Closed Length | 6.57m | LL26X |
| Closed Height | 3.89m | SL245 |
| Stowed Height (guardrails lowered) | 3.13m | Manufacturer Holland Lift |
| Closed Width | 2.65m | |
| Platform Size | 6.15m x 2.5m | |
| Platform Length (deck extended) | 8.25m | |
| Max SWL | 1000kg | |
| Weight | 21910kg | |
| | | |





XNationwide Platforms A LOXAM Company

27.0m

HL275H

scissors

S280-25

scissors


Alternative machines

Working Height 27.2m

| Closed Length | 6.57m |
|---------------------------------------|--|
| Closed Height | 3.89m |
| Stowed Height (guardrails lowered) | 3.13m |
| Closed Width | 2.5m |
| Platform Size | 2.35m x 6.15m |
| Platform Length (deck extended) | 8.25m |
| Max SWL | 1000kg |
| Weight | 25100kg |
| | Closed Height Stowed Height (guardrails lowered) Closed Width Platform Size Platform Length (deck extended) Max SWL |

| | Alternative machines |
|---|-----------------------|
| | M250 LL26X S280 |
| | Manufacturer |
| | Holland Lift |
| n | |
| | |
| | |






0345 745 0000

nationwideplatforms.co.uk

Working Height 28.0m

| Closed Length | 5.96m | LL26X |
|---------------------------------------|---------------|--------------|
| Closed Height | 4.1m | |
| Stowed Height (guardrails lowered) | 3.4m | Manufacturer |
| Closed Width | 2.5m | TIAD |
| Platform Size | 5.48m x 2.44m | |
| Platform Length (deck extended) | 7.57m | |
| Max SWL | 750kg | |
| Weight | 18000kg | |





XNationwide Platforms A LOXAM Company

LL26X

scissors

HL340D

Max SWL

Weight

scissors


33.5m

Working Height 28.3

| | Closed Length | 7.1 |
|------|---------------------------------------|-----|
| | Closed Height | 4.2 |
| 3.3m | Stowed Height (guardrails lowered) | 3.1 |
| ñ | Closed Width | 2.5 |
| | Platform Size | 6.7 |
| | Platform Length (deck extended) | 9.8 |
| | Max SWL | 10 |
| | Weight | 25 |
| | | |

| 8.3m | Alternative machines |
|-----------------------|--------------------------|
| 15m 2m 1m | M250 SL245 S280-25 |
| 5m 7m x 2.5m 8m | Manufacturer Liftlux |
| 000kg 5000kg | |





0345 745 0000

nationwideplatforms.co.uk


Working Height 33.5m Alternative Closed Length 7.02m S280-25 1126X **Closed Height** 3.63m Stowed Height 2.87m (quardrails lowered) Closed Width 2 98m Platform Size 6 66m x 2 80m Platform Length 9 66m (deck extended)

1000kg

31350kg

machines

Manufacturer Holland Lift



XNationwide Platforms A LOXAM Company

Boom Lifts



0345 745 0000 nationwideplatforms.co.uk

- More than 6,100 units available to hire across the UK
- Working heights from 10m to 56m
- · Variety of power options
- · Narrow aisle machines
- Telescopic or articulating action
- Rough terrain tyre option
- Non-marking tyres for use on finished floors

| Machine type by product code | | |
|------------------------------|------------|------------|
| Star10 | Z45BJ | Z80 |
| Star10A | Z45EJ | HA260PX |
| Z30N | HA16PX | 80JX |
| G30N | HA16RTJ | G85X |
| 30JP | Z4525DJX | S85 |
| HA12CJ | SJ46AJ | HR28H |
| Z33E | HR17H | 860SJ |
| HR12NBS | TITAN60 | HA32PX |
| G34N | Z60FE | 1200SJP |
| G34DX | 60AJX | 1250AJP |
| 40NJ | G60X | S125 |
| HA15IP | HA20RTJPRO | HA41RTJPRO |
| HR15NBS | HA20PX | Z135 |
| HR15NH | HR21H | ZX135 |
| Z45DJX | HR21D | SX135HC |
| 45MJ | Z62 | 1350SJP |
| S45X | S65X | SX150 |
| 45JSX | 66JX | 1500AJP |
| Z45DJXC | HT23RTJ | SX180 |
| | | |

X Nationwide Platforms

Star10

booms

Alternative

Manufacturer

machines

Star10 A

Haulotte

Star10 A


booms

Working Height 10.0m Horizontal 3.0m Outreach

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

2.62m 1.99m 1.0m 0.9m x 0.7m 360° 200kg 2760ka





0345 745 0000

nationwideplatforms.co.uk

Working Height 10.0m Horizontal Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight


3.0m 2.7m 1.99m 1.0m 0.98m x 0.78 345° 200kg

2677ka

Alternative machines Star10

Manufacturer Haulotte

fitted with manufacturers secondary guarding as standard



XNationwide Platforms A LOXAM Company



Z30N

booms

Working Height 10.89m Horizontal 6.25m Outreach

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

5.31m

1.17m x 0.76m

2.0m

1.19m


355°

227kg

6450kg

Alternative machines 30JP 30J 40NJ G30N Manufacturer Genie





XNationwide Platforms A LOXAM Company

10.89m 6.25m

G30N

booms

Alternative

Manufacturer

machines

30JP

Z30N

Genie


30JP

booms

Working Height11.0mHorizontal6.4mOutreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 5.2m 2.0m 1.2m 1.17m x 0.76m 355° 227kg 6577kg






0345 745 0000

nationwideplatforms.co.uk

Working Height 11.14m Horizontal 6.25m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight **11.14m 6.25m** 5.59m 2.0m 1.22m 1.22m x 0.76m 140° 227kg 6849kg Alternative machines G30N Z30N 30J Manufacturer JLG





X Nationwide Platforms

HA12CJ

booms

Z33E

booms

Working Height 11.68m Horizontal 6.94m **Outreach**


Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

11.68m

6.94m

5.36m 1.99m 1.2m 1.14m x 0.80m 355° 250kg 7065ka





0345 745 0000

nationwideplatforms.co.uk

Z30N 30.JP Manufacturer Haulotte

Alternative

machines

G30N

Working Height 12.0m Horizontal Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

Batt

 \bigcirc

5.57m 4.17m 1.98m 1.5m 1.16m x 0.76m

400°

2

200kg


3665ka

Alternative machines HR12NB HR12NBS

Manufacturer

Genie

IPAF 3b



XNationwide Platforms A LOXAM Company

HR12NBS

booms

G34N

booms

Working Height 12.2m Horizontal 6.1m **Outreach**


Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weiaht

| ••••• |
|--|
| 4.1m 1.9m 1.5m 1.10m x 0.65m 360° 200kg 3435kg |

| machines |
|--------------------------|
| 40NJ HR15NB HR12NB |
| Manufacturer |
| Niftylift |
| |

Altornativo

fitted with manufacturers secondary guarding as standard



0345 745 0000

nationwideplatforms.co.uk

Working Height 12.52m Horizontal


Outreach Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

Batt

6.78m 5.72m 2.0m 1.47m 1.42m x 0.76m 355° 227kg

5171ka

Alternative machines HR12NB Z33 G34F HR12NB Manufacturer Genie



XNationwide Platforms A LOXAM Company

G34DX

booms

Alternative

Manufacturer

machines

G34D

Genie

40NJ


booms

Working Height 12.62m Horizontal 6.78m **Outreach**

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weiaht

5.66m 2.06m 1.85m 1.42m x 0.76m 355° 227kg 4929ka





0345 745 0000 nationwideplatforms.co.uk

Working Height 14.19m Horizontal 6.83m Outreach

2

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

Batt


6.71m 1.97m 1.5m 1.22m x 0.76m 360° 230kg

IPAF 3b

6759ka

Alternative machines HR15NB Z45BJ Manufacturer

JI G



XNationwide Platforms A LOXAM Company

HA15IP

booms

Alternative

machines

HR15NBS

Manufacturer

HR15NH

Haulotte


HR15NBS

booms

Working Height 14.87m Horizontal 8.65m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 6.65m 2.1m 1.52m 1.15m x 0.80m 355° 230kg 7230kg





0345 745 0000 nationwideplatforms.co.uk

Working Height 15.4m Horizontal 9.6m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight


 \bigcirc

Dual

15.4m **9.6**m 6.3m 2.1m 1.5m 1.5m x 0.7m 360° 225kg 6680ka

Alternative machines 40NJ Z45BJ HR15NB Manufacturer Niftylift

fitted with manufacturers secondary guarding as standard



2

X Nationwide Platforms

15.4m

9.6m

HR15NH

booms


Z45DJX

booms

Working Height 15.5m Horizontal 9.7m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 6.4m 1.99m 1.5m 1.5m x 0.8m 360° 225kg 7250kg Alternative machines HR15NBS Manufacturer Niftylift

fitted with manufacturers secondary guarding as standard



0345 745 0000 nationwideplatforms.co.uk

Working Height 15.69m Horizontal 7.6m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

15.69 7.6 6.78m 2.08m 2.23m

1.82m x 0.76m

6892kg (Foam Filled)

359°

227kg

machines Z45D Z45D-R Z4525DJX


Alternative

Manufacturer

Genie

B) RT² A **i**¹⁻² **··· ·· ·· ···· ···· ··· ··· ··· ···· ··· ···· ···· ···· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ··· ···· ···**

6542kg (Air)



X Nationwide Platforms

45MJ

booms

Alternative

machines

HR15NBS

Manufacturer

Z45BJ

45MJP

JI G

S45X

booms

Manufacturer


Genie

Working Height 15.72m Horizontal 7.24m **Outreach**

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

6.5m 2.01m 1.75m 1.52m x 0.76m 360° 230kg 6532kg






0345 745 0000 nationwideplatforms.co.uk

Working Height 15.72m Horizontal 11.18m Outreach

| Closed Length | 8.48m |
|--------------------|---------------|
| Closed Height | 2.49m |
| Closed Width | 2.3m |
| Platform Size | 1.83m x 0.76m |
| Rotation | Continuous |
| Max SWL | 227kg |
| Weight | 6709kg |
| Reach Below Ground | 1.5m |
| | |





XNationwide Platforms A LOXAM Company

11.18m

45JSX

booms

Alternative

machines

HA16SPX

Manufacturer

Z45DJX

JI G


Z45DJXC

booms

Working Height 15.72m Horizontal 7.47m **Outreach**

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

6.58m 2.27m 2 35m 1.83m x 0.76m 355° 230kg 7484ka



0345 745 0000

nationwideplatforms.co.uk

Working Height 15.86m Horizontal Outreach

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight


7.55m 6.66m 2.25m 2 29m 1.83m x 0.76m 355°

Alternative machines Z45DJX 45JSX HA16SPX Manufacturer Genie



454kg

6984ka



XNationwide Platforms A LOXAM Company

7.55m

Z45BJ

booms

Alternative

Manufacturer

machines

Z45EJ

Genie


Z45EJ

booms

Working Height 15.94m Horizontal 7.65m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 6.83m 2.0m 1.79m 1.83m x 0.76m 355° 227kg 7620kg





0345 745 0000 nationwideplatforms.co.uk


Working Height 15.94m Horizontal 7.65m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight **15.94m 7.65m** 6.83m 2.0m 1.79m 1.83m x 0.76m 355° Alternative machines 45EJ Z45E 45EJ Manufacturer Genie



227kg

7394ka



X Nationwide Platforms

HA16PX

booms

Alternative

machines

Z4525DJX

Manufacturer

45JSX

S.146A.1

Haulotte


HA16RTJ

booms

Working Height16.0mHorizontal9.15mOutreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 6.95m 2.3m 2.3m 1.8m x 0.8m 360° 230kg 6950kg

RT⁴ A 2 4 For the second sec



0345 745 0000 nationwideplatforms.co.uk

Working Height 16.0m Horizontal 8.3m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

A RT4 🕇 2 🖵 👬 3b

Alternative machines Z4525DJX 45JSX SJ46AJ Manufacturer Haulotte

18 16 ЯП 14 Envelope 12 10 8 Working 16.0m 8.3m 0 10 12 14 16 18

6.75m

2.3m

2.3m

355°

230kg

6200ka

1.83m x 0.8m

X Nationwide Platforms

Z4525DJX

booms

Alternative

Manufacturer

machines

Z45DJX

45JSX

Genie

SJ46AJ


booms

Working Height 16.05m Horizontal 7.52m **Outreach**

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

6.65m 2.13m 2.29m 1.83m x 0.76m 355° 227kg 6574ka





0345 745 0000 nationwideplatforms.co.uk


Working Height 16.1m Horizontal Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

7.54m 6 5m 2.07m 2.29m 1.83m x 0.76m 360° 227kg 6500kg

Alternative machines Z4525DJX Z45DJX 45.JSX 160ATJ Manufacturer Skyjack





XNationwide Platforms A LOXAM Company

HR17H

booms

Alternative

Manufacturer

machines

HR21H

Niftylift


TITAN60

booms

Working Height17.2mHorizontal9.4mOutreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 6.35m 2.1m 2.0m 1.8m x 0.85m 360° 225kg 5000kg





0345 745 0000

nationwideplatforms.co.uk


Working Height 20.0m Horizontal 14.6m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

20.0m 14.6m 7.0m 3.4m 2.6m 6.7m x 2.28m 180° 1350kg

18000ka

Alternative machines TITAN40 Manufacturer MEC



X Nationwide Platforms

Z60FE

booms

Alternative

Manufacturer

machines

HR21H


Genie

60AJX

booms

Working Height20.16mHorizontal11.15mOutreach11.15m

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 8.15m 2.54m 2.49m 1.83m x 0.76m 355° 227kg 7756kg




0345 745 0000 nationwideplatforms.co.uk

Working Height 20.29m Horizontal 12.12m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 20.29m 12.12m 8.82m 2.56m 2.44m 1.83m x 0.91m 180° 227kg 10650kg Alternative machines Z62 G60X HR21D 60AJ 60AJX-P Manufacturer JLG





X Nationwide Platforms

G60X

booms

HA20RTJPRO

booms


Working Height 20.39m Horizontal 11.05m **Outreach**

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

8.15m 2.69m 2.46m 1.83m x 0.76m Continuous 227kg 10,025kg (Air) 10,765kg (Foam Filled)

Alternative machines G60-R HR21D 60HJX Z62 Manufacturer Genie





0345 745 0000 nationwideplatforms.co.uk

Working Height 20.6m Horizontal 12.2m Outreach

8.8m

2.51m

2.42m

230ka


9600ka

Continuous

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight



Alternative machines G60X HA260PX HR21D Manufacturer Haulotte 1.83m x 0.80m



XNationwide Platforms A LOXAM Company

HA20PX

booms

Alternative

Manufacturer

machines


G60X

Haulotte

Working Height20.65mHorizontal13.5mOutreach13.5m

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 8.93m 2.67m 2.38m 1.8m x 0.8m 360° 230kg 11710kg

RT4 2 III IPAF



WES

0345 745 0000 nationwideplatforms.co.uk

X Nationwide Platforms

HR21H

booms

HR21D

booms

Working Height 20.8m Horizontal 12.5m Outreach


Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

| 5.3m |
|---------------|
| 2.15m |
| 2.27m |
| 1.80m x 0.85m |
| 360° |
| 225kg |
| 6500kg |
| |

Alternative machines M60J HR21B Manufacturer

Niftylift

fitted with manufacturers secondary guarding as standard



0345 745 0000 nationwideplatforms.co.uk

Working Height 20.8m Horizontal 12.5m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

12.5m 5.3m 2.15m 2.27m 1.8m x 0.85m 360° 225kg


6220ka

2

U

IPAF 3b Alternative machines HA20PX G60X

Manufacturer Niftylift



X Nationwide Platforms

Z62

booms

Alternative

Manufacturer

machines

G60X

60AJX


Genie

S65X

booms

Working Height 20.87m Horizontal 12.47m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 9.25m 2.4m 2.49m 1.83m x 0.76m Continuous 227kg 10766kg




0345 745 0000 nationwideplatforms.co.uk

Working Height 21.8m Horizontal 17.1m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight Reach Below Ground 21.8m 17.1m 9.5m 2.72m 2.5m 1.83m x 0.76m Continuous 227kg 10102kg 2.71m Alternative machines G65X 66JX Manufacturer Genie





X Nationwide Platforms

66JX

booms

HT23RTJ

booms


Working Height 22.12m Horizontal 17.3m **Outreach**

Closed Length **Closed Height** Closed Width Platform Size Rotation Max SWL Weight

10.21m 2.56m 2.43m 1.83m x 0.91m 180° 227kg 13500ka



JLG



0345 745 0000 nationwideplatforms.co.uk

Working Height 22.5m Horizontal Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight Reach Below Ground

D


18.3m 10.4m 2.7m 2.47m 2.44m x 0.91m Continuous 230kg

Alternative machines S65X 66JX

Manufacturer Haulotte 13400ka



4.0m



XNationwide Platforms A LOXAM Company

22.5m l8.3m

Z80

booms

Alternative

Manufacturer

machines

80JX


Genie

HA260PX

booms

Working Height 25.6m Horizontal 18.29m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 11.27m 3.0m 2.49m 2.44m x 0.91m Continuous 227kg 17010kg



0345 745 0000 nationwideplatforms.co.uk

Working Height 25.6m Horizontal 16.2m Outreach

■ A RT4 1 2 4 10 IPAF

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight

12.0m 2.71m 2.4m

1.8m x 0.8m


360°

230kg

15890ka

Alternative machines 80JX Z80 Manufacturer

Haulotte



X Nationwide Platforms

80JX

booms

Alternative

Manufacturer

machines

Z80

JLG

Working Height26.38mHorizontal15.74mOutreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 11.12m 3.0m 2.44m 1.83m x 0.91m 360° 230kg 15600kg





0345 745 0000

nationwideplatforms.co.uk

▲ Nationwide Pl 45 745 0000

A LOXAM Company

G85X

booms

Alternative

Manufacturer

machines

G85

860SJ

Genie


S85

booms

Working Height 27.7m Horizontal 23.4m Outreach

| Closed Length |
|------------------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Rotation |
| Max SWL |
| Weight |
| Reach Below Ground |
| Operational Full Width |
| |

23.4m 12.4m 2.8m 2.4m 1.8m x 0.76m Continuous 227kg 16500kg 2.89m 3.07m



0345 745 0000 nationwideplatforms.co.uk

Working Height 27.9m Horizontal 23.32m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight Reach Below Ground 27.9m 23.32m 12.4m 2.8m 2.5m 1.83m x 0.76m Continuous 227kg


17236ka

RT4 S 🚺 2 🚻 🛡 🛅 🖉 🕶 🚯 📰 😘 🚍 🕂

2 89m

Alternative machines 860SJ G85X Manufacturer

Genie



X Nationwide Platforms

HR28H

booms


860SJ

booms

Working Height 28.0m Horizontal 19.0m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight 9.28m 2.7m 2.49m 2.4m x 0.9m 360° 280kg 14700kg Alternative machines Z80 80J Manufacturer Niftylift

fitted with manufacturers secondary guarding as standard




0345 745 0000 nationwideplatforms.co.uk

Working Height28.21mHorizontal22.86mOutreach21.00m

| Closed Length | 12.19m |
|--------------------|---------------|
| Closed Height | 3.05m |
| Closed Width | 2.49m |
| Platform Size | 2.44m x 0.91m |
| Rotation | 360° |
| Max SWL | 227kg |
| Weight | 16511kg |
| Reach Below Ground | 3.0m |
| | |

Alternative machines G85X Manufacturer JLG





X Nationwide Platforms

HA32PX

booms

Alternative

Manufacturer

machines

1250AJP


Haulotte

1200SJP

booms

Working Height31.8mHorizontal21.3mOutreach21.3m

Closed Length Closed Height Closed Width Platform Size (extended) Rotation Max SWL Weight Reach Below Ground **21.3m** 11.16m 2.7m 2.5m 2.44(3.33)m 0.80m Continuous 250kg 20800kg 4.0m



0345 745 0000 nationwideplatforms.co.uk

Working Height 38.73m Horizontal 22.86m Outreach

| Closed Length |
|------------------------|
| Closed Height |
| Closed Width |
| Platform Size |
| Rotation |
| Max SWL |
| Weight |
| Operational Full Width |
| |

38.73m 22.86m 10.64m 3.05m 2.49m

2.44m x 0.91m

Continuous

230kg

3.81m

18500ka



| | 50 | _ | | | | | | | | | | | | 38 73m |
|------------------|----|---|----|---|----|--------|----------|----|----|----|----|----|----|--------|
| | 45 | | | | | | | | | | | | | |
| | 40 | | | | | | | | | | | | | l |
| be | 35 | | | K | | | | | | | | | | l |
| working Envelope | 30 | | | / | | | 10 | | | | | | | 3 |
| 2 | 25 | | | | | | HI HI | | | | | | | |
| ם ס | 20 | | _/ | | | 450 NS | 230 kg | | | | | | | l |
| 2 | 15 | | A | E | | ú | | | | | | | | l |
| 2 | 10 | | | | | | | | | | | | | L |
| | 5 | | | | | | | | | | | | | L |
| | 0 | - | P | | | | | | | | | | | |
| | 5 | 5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | |

1250AJP

booms

Alternative

Manufacturer

machines

1350SJP

Z135


JI G

S125

booms

Working Height 40.1m Horizontal 19.25n Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight Operational Full Width **19.25m** 11.45m 3.05m 2.49m 2.44m x 0.91m Continuous 227kg 19958kg 3.81m



0345 745 0000 nationwideplatforms.co.uk


Working Height 40.15m Horizontal 24.38m Outreach

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight Operational Full Width **24.38m** 14.25m 3.07m 2.49m 2.44m x 0.91m Continuous 227kg 20248kg

3.35m

Alternative machines 1200SJP 1350SJP

Manufacturer Genie 91m



X Nationwide Platforms

HA41RTJPRO

booms

Alternative

machines

1250AJP

Haulotte

Manufacturer

Z135

Z135

booms


43.15m

Working Height 41.5m Horizontal 20.1m Outreach

0

5

20.1m 13.1m 3.0m 2.53m 2.44m x 0.91m 360° 230kg 23900kg 1.5m 3.3m



20

0345 745 0000

nationwideplatforms.co.uk

25

10 15

30

40 45 50

35


Working Height 43.15m Horizontal 21.26m Outreach

| Closed Length Closed Height Closed Width |
|--|
| Platform Size |
| Rotation |
| Max SWL |
| Weight |
| Reach Below Ground |
| Operational Full Width |

43.15 21.26 12.93m 3.07m 2.46m 2.44m x 0.91m Continuous 272kg 20366kg 5.87m

3.94m

Alternative machines 1350SJP 1250AJP ZX135 150HAX Manufacturer Genie




Solutionwide Platforms

ZX135

booms

SX135HC

booms

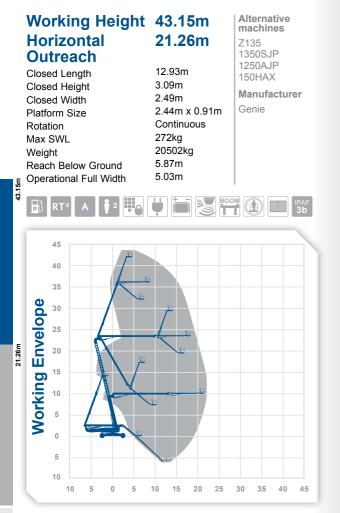

0345 745 0000 nationwideplatforms.co.uk


Working Height 43.15m Horizontal 27.43m Outreach

| Closed Length | 19. |
|------------------------|-----|
| Closed Height | 3.0 |
| Closed Width | 2.4 |
| Platform Size | 2.4 |
| Rotation | Co |
| Max SWL | 454 |
| Neight | 21 |
| Reach Below Ground | 6.0 |
| Operational Full Width | 3.9 |
| | |

15m Alternative machines 1350SJP Manufacturer m Genie

19.76m 3.05m 2.49m 2.44m x 0.91m Continuous 454kg 21747kg 6.0m 3.94m





X Nationwide Platforms

79

27.43m

1350SJP

booms

Alternative

machines

1200SJP

Manufacturer

Z135

S125

JI G

SX150

booms

Alternative

Manufacturer


machines

SX180

Genie

Working Height 43.3m Horizontal **Outreach**

Closed Length Closed Height Closed Width Platform Size Rotation Max SWL Weight **Operational Full Width** 24.38m 11.86m 3.05m 2.49m 2.44m x 0.91m Continuous 230kg 20400ka 3.81m



5

5

20

15

30

35


40 45 50

Working Height 48.02m Horizontal Outreach

24.38m

16 18m 3.05m 2.49m 2.44m x 0.91m Continuous 340ka 23236kg 0.91m 5.03m





XNationwide Platforms A LOXAM Company

24.38m

48.02m

1500AJP

booms

SX180

booms

Manufacturer

Genie

Working Height48.15mHorizontal23.55mOutreach23.55m


Closed Length Closed Height Closed Width Platform Size (extended) Rotation Max SWL (extended) Weight Reach Below Ground Operational Full Width

48.15m

<₽

| Manufacturer | JLG

h 15.1m t 3.1m 2.5m (extended) 2.44(5)m x 0.91m Continuous tended) 450(270)kg 26127kg Ground 6.1m ull Width 5m




0345 745 0000 nationwideplatforms.co.uk

Working Height56.86mHorizontal24.38mOutreach24.38m

| Closed Length | 14.33m |
|------------------------|---------------|
| Closed Height | 3.05m |
| Closed Width | 2.49m |
| Platform Size | 2.44m x 0.91m |
| Rotation | Continuous |
| Max SWL | 340kg |
| Weight | 25095kg |
| Operational Full Width | 5.03m |
| | |





Xationwide Platforms

56.86m

Van Mounted



0345 745 0000 nationwideplatforms.co.uk

- More than 290 units available to hire across the UK
- Versalift boom assemblies
 on most models
- All vehicles comply to EN280:2001 and are CE certified
- Dual roof mounted beacons/working lights
- Reverse alarms and night switches

- · Steel bulkheads
- Internal racking, ply lining and hot and cold hand wash unit option available
- Tracker devices available as options on long term hires
- Operated or self-drive options available

Machine type by product code

| VT125K | V14E |
|--------|------|
| VT12E | V16E |



X Nationwide Platforms

VT125K

van mounts

VT12E

van mounts


Working Height 12.0m Horizontal 7.0m **Outreach** Max Horiz. Outreach (full SWL) 7.0m Overall travel Length 6 8m Overall travel Height 3.3m Overall travel Width 2 2m Platform/cage size Max SWL 200ka Gross vehicle weight class 3500kg

Alternative machines V12E Manufacturer GSR

Operational Full Width Minimum Operational width As above (straight down jacking)

1.0m x 0.60m 2.45m





0345 745 0000 nationwideplatforms.co.uk

Working Height Horizontal 7.0m Outreach

| Max Horiz. Outreach (full SWL) | 7.0m |
|---|------------|
| Overall travel Length | 6.74m |
| Overall travel Height | 3.15m |
| Overall travel Width | 2.2m |
| Platform/cage size | 1.0m x 0.6 |
| Max SWL | 200kg |
| Gross vehicle weight class | 3500kg |
| Operational Full Width | 2.45m |
| Minimum Operational width (straight down jacking) | As above |
| | |

13.0m Alternative machines V14E

0.60m

Manufacturer Versalift

| | 20 | | | | | | | | |
|------------------|----|----|---|---|------------|--|--|--|--|
| | 18 | | | | | | | | |
| | 16 | | | | | | | | |
| be | 14 | | | | | | | | |
| Working Envelope | 12 | _ | | | | | | | |
| S | 10 | | 7 | | | | | | |
| D | 8 | | ſ | | | | | | |
| Y | 6 | | | | | | | | |
| 2 | 4 | | | | | | | | |
| 5 | 2 | | | | | | | | |
| | 0 | 0- | | 0 | V . | | | | |
| | 2 | | | | | | | | |

XNationwide Platforms A LOXAM Company

13.0m

7.0m

V14E

14.2m

van mounts

V16E

Max SWL

van mounts

| Working Height | 14.2m |
|---|------------|
| Horizontal | 7.3m |
| Outreach | |
| Max Horiz. Outreach (full SWL) | 7.3m |
| Overall travel Length | 7.34m |
| Overall travel Height | 3.8m |
| Overall travel Width | 2.2m |
| Platform/cage size | 1.0m x 0.6 |
| Max SWL | 200kg |
| Gross vehicle weight class | 5200kg |
| Operational Full Width | 2.25m |
| Minimum Operational width (straight down jacking) | As above |


Alternative machines V16E Manufacturer

Versalift

C1 .

6m





0345 745 0000 nationwideplatforms.co.uk

Working Height Horizontal Outreach


16.5m 7.3m

1PAF

C1 🛓

Max Horiz. Outreach (full SWL) 7.3m Overall travel Length 8.22m **Overall travel Height** 4.0m Overall travel Width 2 2 m 1.0m x 0.6m Platform/cage size 200ka Gross vehicle weight class 6500kg **Operational Full Width** 2.45m Minimum Operational width (straight down jacking) As above

Alternative machines T16N T17GS Manufacturer Versalift



XNationwide Platforms A LOXAM Company

Truck Mounted



- More than 300 units available to hire across the UK
- Working heights from 13m to 90m
- Self drive options up to 26m (3.5T and 7.5T chassis)
- All vehicles available with experienced IPAF trained operators

- Most cost effective method of access for short term hires
- Large fleet of 4 wheel drive machines – ideal for off road application
- Narrow jacking and zero tail swing models available
- Models with SWL of up to 700kg

Machine type by product code

| TI135EX | T22AS | T38B |
|---------|--------|---------|
| T14GS | T22GS | T44B |
| T17BE | T22GSH | T46B |
| T17GS | T26CX | T48P |
| T18AS | T26GS | T50JB |
| T18ASH | T27R | T56B-XR |
| T20HC | T28RX | T58R |
| T20GS | T33R | T70B |
| T20M | T33RH | T70B-XR |
| T21JC | T37R | T90B |
| | | |

0345 745 0000 nationwideplatforms.co.uk

X Nationwide Platforms

TI135EX

truck mounts

Manufacturer

Versalift


T14GS

truck mounts

Working Height 13.3m 6.1m **Outreach**

Max Reach Below 0m **Overall Travel Length Overall Travel Height Overall Travel Width** Platform Cage Size Max SWL Gross Vehicle Weight **Operational Full Width** Minimum Operational Width Point Load Front / Rear

n/a 4.7m 2.6m 2.0m 10m X 06m 230ka 3500kg 2.4m 2.4m 20kN / 20kN




0345 745 0000 nationwideplatforms.co.uk

Working Height 14.0m Outreach 8.0m

| Overall Travel Length | 7.2m |
|---------------------------|-------------|
| Overall Travel Height | 2.95m |
| Overall Travel Width | 2.1m |
| Platform Cage Size | 1.4m x 0.7m |
| Max SWL | 200kg |
| Gross Vehicle Weight | 3500kg |
| Operational Full Width | 2.4m |
| Minimum Operational Width | 2.4m |
| Point Load Front / Rear | 28kN / 28kN |
| | |

Manufacturer GSR





XNationwide Platforms A LOXAM Company

T17BE

truck mounts

Alternative

Manufacturer

machines

T18AS

Versalift

T17GS


truck mounts

Working Height 17.2m Outreach 10.0m

| Max Horiz. Outreach (full SWL) | 8.0 |
|--------------------------------|-----|
| Overall Travel Length | 7.2 |
| Overall Travel Height | 3.7 |
| Overall Travel Width | 2.5 |
| Platform Cage Size | 1.0 |
| Max SWL | 265 |
| Gross Vehicle Weight | 650 |
| Operational Full Width | 2.4 |
| Minimum Operational Width | 2.4 |
| Point Load Front / Rear | 60 |

10.0m 3.0m 7.2m 3.7m 2.5m 1.0m x 0.6m 265kg 5500kg 2.4m 2.4m 500kN / 60kN






0345 745 0000 nationwideplatforms.co.uk

Working Height 17.1m Outreach 9.5m

| า ท m |
|-------------|
| |
| m |
| |
| n |
| n x 0.7m |
| g |
|)kg |
| ı |
| ı |
| l / 28kN |
| |







X Nationwide Platforms

T18AS

truck mounts

T18ASH

truck mounts

Working Height 18.0m Outreach 13.0m

Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear


18.0m

13.0m

| 13.011 |
|--------------|
| 7.0m |
| 3.0m |
| 2.3m |
| 1.4m x 0.73m |
| 230kg |
| 3500kg |
| 3.6m |
| 2.3m |
| 28kN / 28kN |
| |

Alternative machines T18ASH T20M T20HC T20GS Manufacturer Ascendant






0345 745 0000 nationwideplatforms.co.uk

Working Height 18.0m Outreach 13.0m

| Max Horiz. Outreach (full SWL) | 13.0m |
|--------------------------------|--------------|
| Overall Travel Length | 7.0m |
| Overall Travel Height | 3.0m |
| Overall Travel Width | 2.1m |
| Platform Cage Size | 1.4m x 0.73m |
| Max SWL | 230kg |
| Gross Vehicle Weight | 5000kg |
| Operational Full Width | 3.8m |
| Minimum Operational Width | 2.3m |
| Point Load Front / Rear | 50kN / 50kN |
| | |





X Nationwide Platforms



T20HC

truck mounts

Working Height 20.0m Outreach 9.0m


Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear Alt ma

6.76m 2.5m 2.1m 1.4m x 0.7m 300kg 3500kg 2.93m 2.93m 2.85M / 28kN



Manufacturer CTE





0345 745 0000 nationwideplatforms.co.uk

X Nationwide Platforms

T20GS

truck mounts

Alternative

Manufacturer

machines

GSR

T20M

D

truck mounts


Working Height 20.0m Outreach 8.2m


Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight **Operational Full Width** Minimum Operational Width Point Load Front / Rear

20.0n

8.2m

7.46m 2.77m 2 1m 1.4m x 0.7m 280kg 3500kg 2.3m 2.3m 25kN / 18kN





0345 745 0000 nationwideplatforms.co.uk


Working Height 20.0m Outreach

11.0m (80kg)

C1 .

| Max Horiz. Outreach (full SWL) | 8.6m |
|--------------------------------|-------------|
| Max Reach Below 0m | 2.0m |
| Overall Travel Length | 7.65m |
| Overall Travel Height | 3.0m |
| Overall Travel Width | 2.1m |
| Platform Cage Size | 1.4m x 0.7m |
| Max SWL | 250kg |
| Gross Vehicle Weight | 3500kg |
| Operational Full Width | 3.4m |
| Minimum Operational Width | 2.5m |
| Point Load Front / Rear | 30kN / 19kN |

Alternative machines T20C T21JC Manufacturer Multitel



XNationwide Platforms A LOXAM Company

T21JC

truck mounts

Alternative

Manufacturer

machines

T20C

T20M


CTF

T22AS

truck mounts

Working Height 21.0m Outreach 10.0m

Max Reach Below 0m Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear **10.0m** n/a 6.8m 2.6m 2.1m 1.4m x 0.7m 280kg 3500kg 2.9m 28kN / 28kN



0345 745 0000 nationwideplatforms.co.uk


Working Height 22.0m Outreach 17.5m

Max Reach Below 0m n/a **Overall Travel Length** 9.2m 3.5m **Overall Travel Height Overall Travel Width** 2.4m Platform Cage Size 18m x 11m Max SWL* 280ka Gross Vehicle Weight 7500kg 4.5m **Operational Full Width** Minimum Operational Width 2.5m Point Load Front / Rear 60kN / 60kN

Alternative machines T22GS Manufacturer Ascendant

IPAF **1b**

C1 🛓



X Nationwide Platforms

T22GS

truck mounts

Alternative

Manufacturer

machines

T22AS


GSR

T22GSH

truck mounts

Working Height 22.0m Outreach 17.7m

Max Reach Below 0m Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL* Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear **17.7m** n/a 8.7m 3.55m 2.5m 1.8m x 0.8m 280kg 7500kg 4.5m 2.5m 60kN / 60kN



0345 745 0000


nationwideplatforms.co.uk

Working Height 22.0m Outreach 17.7m

Max Reach Below 0m n/a **Overall Travel Length** 8.7m 3.55m **Overall Travel Height Overall Travel Width** 2.5m Platform Cage Size 18m x 08m Max SWL 280ka Gross Vehicle Weight 8200kg **Operational Full Width** 4.5m Minimum Operational Width 2.5m Point Load Front / Rear 60kN / 60kN

Alternative machines T22GS Manufacturer GSR

1PAF



X Nationwide Platforms

T26CX

truck mounts

Alternative

Manufacturer

machines

T26WX

T26KX


CTE

T26GS

truck mounts

Working Height 26.0m Outreach 12.5m

Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear 7.45m 3.9m 2.6m 1.4m x 0.7m 230kg 14000kg 3.12m 3.12m 140kN / 140kN



0345 745 0000 nationwideplatforms.co.uk

Working Height 26.0m Outreach 14.0m


20.011 ma 14.0m (280kg)

C1. SEVE

Alternative machines T26C Manufacturer

| Max Horiz. Outreach (full SWL) | 14.0m |
|--------------------------------|-------------|
| Overall Travel Length | 7.8m |
| Overall Travel Height | 3.6m |
| Overall Travel Width | 2.5m |
| Platform Cage Size | 1.4m x 0.7m |
| Max SWL | 280kg |
| Gross Vehicle Weight | 7500kg |
| Operational Full Width | 3.5m |
| Minimum Operational Width | 3.5m |
| Point Load Front / Rear | 60kN / 60kN |
| | |

Manufac GSR



IPAF 1b

X Nationwide Platforms

T27R

truck mounts

Alternative

machines

Ruthman

T28RX


truck mounts

Working Height 27.0m Outreach** 21.0m (100kg)

| Max Horiz. Outreach (full SWL) | 16 |
|--------------------------------|----|
| Max Reach Below 0m | n/ |
| Overall Travel Length | 7. |
| Overall Travel Height | 3. |
| Overall Travel Width | 2. |
| Platform Cage Size | 1. |
| Max SWL | 32 |
| Gross Vehicle Weight | 75 |
| Operational Full Width | 5. |
| Minimum Operational Width | 2. |
| Point Load Front / Rear | 72 |

T26C 6.0m Manufacturer /a .87m .3m 54m .85m x 1.0m 20kg 500ka .1m 5m 2kN / 55kN





0345 745 0000 nationwideplatforms.co.uk


Working Height 28.0m Outreach**

21.3m (100kg)

Alternative machines T26CX Manufacturer Ruthman

| Max Horiz. Outreach (full SWL) | 16.0m |
|--------------------------------|--------------|
| Max Reach Below 0m | n/a |
| Overall Travel Length | 8.12m |
| Overall Travel Height | 3.8m |
| Overall Travel Width | 2.5m |
| Platform Cage Size | 1.7m x 0.86m |
| Max SWL | 320kg |
| Gross Vehicle Weight | 11000kg |
| Operational Full Width | 3.8m |
| Minimum Operational Width | 2.5m |
| Point Load Front / Rear | 110kN / 50kN |
| | |

D 1PA



XNationwide Platforms A LOXAM Company

T33R

truck mounts

Alternative

Manufacturer

machines

T33RH

Ruthman

T33RH

Max Reach Below 0m

Overall Travel Length

Overall Travel Height

Overall Travel Width

Platform Cage Size

Gross Vehicle Weight

Operational Full Width

Point Load Front / Rear

Minimum Operational Width


Max SWL

truck mounts

Working Height 33.0m Outreach** 21.2m

Max Horiz. Outreach (full SWL)16.5mOverall Travel Length8.7mOverall Travel Height3.56mOverall Travel Width2.5mPlatform Cage Size1.7m ×Max SWL320kgGross Vehicle Weight7490kgOperational Full Width5.32mMinimum Operational Width2.53mPoint Load Front / Rear56kN

21.2m (100kg) 16.5m 8.7m 3.56m 2.5m 1.7m x 0.86m 320kg 7490kg 5.32m 2.53m 56kN / 42kN



0345 745 0000 nationwideplatforms.co.uk

Working Height 33.0m Outreach** 21.2m

Max Horiz, Outreach (full SWL) 16.5m

21.2m (100kg) machi

n/a

8.7m

3.56m

320kg

8600ka

5.32m

2.53m

56kN / 42kN

2.5m 1.7m x 0.86m

| . | machines |
|----|--------------|
| I) | T37R T38B |
| | Manufacturer |
| | Ruthman |

Alternative

X Nationwide Platforms

95

33.0m

21.2m



truck mounts


Working Height 37.0m Outreach** 30.0m

30.0m (100kg)

Alternative machines T38B Manufacturer

| Max Horiz. Outreach (full SWL) | 21.0m | |
|--------------------------------|------------------|--|
| Max Reach Below 0m | 6.0m | |
| Overall Travel Length | 8.9m | |
| Overall Travel Height | 3.9m | |
| Overall Travel Width | 2.55m | |
| Platform Cage Size (extended) | 2.3(3.6)m x 0.9m | |
| Max SWL | 500kg | |
| Gross Vehicle Weight | 18000kg | |
| Operational Full Width | 6.4m | |
| Minimum Operational Width | 2.6m | |
| Point Load Front / Rear | 170kN / 140kN | |
| | | |

Ruthman



0345 745 0000 nationwideplatforms.co.uk

XNationwide Platforms A LOXAM Company

30.0m

37.0m

T38B

truck mounts


T44B

truck mounts

Working Height 38.0m Outreach** 25.3m (120kg)

| Max Horiz. Outreach (full SWL) | 21.0m |
|--------------------------------|-------------------|
| Max Reach Below 0m | 6.5m |
| Overall Travel Length | 10.0m |
| Overall Travel Height | 3.7m |
| Overall Travel Width | 2.5m |
| Platform Cage Size (extended) | 2.3(3.7)m x 1.05m |
| Max SWL | 600kg |
| Gross Vehicle Weight | 18000kg |
| Operational Full Width | 6.2m |
| Minimum Operational Width | 2.8m |
| Point Load Front / Rear | 150kN / 150kN |
| | |

Alternative machines T37B T37R Manufacturer Bronto .05m



0345 745 0000 nationwideplatforms.co.uk

Working Height 44.0m Outreach**

24.0m (120kg)


Alternative machines T46B Manufacturer

Bronto

Max Horiz, Outreach (full SWL) 21.0m Max Reach Below 0m 5.0m 10.0m **Overall Travel Length Overall Travel Height** 3.8m **Overall Travel Width** 2 5m 2.4(3.7)m x 1.0m Platform Cage Size Max SWL 600kg Gross Vehicle Weight 18000ka **Operational Full Width** 6.2m 2.8m Minimum Operational Width Point Load Front / Rear

150kn / 150kn





XNationwide Platforms A LOXAM Company

14.0m

24.0m

T46B

truck mounts

Alternative

T48P


truck mounts

Working Height 46.0m Outreach**

| | Max Horiz. Outreach (full SWL) |
|-------|--------------------------------|
| | Max Reach Below 0m |
| | Overall Travel Length |
| | Overall Travel Height |
| | Overall Travel Width |
| | Platform Cage Size |
| | Max SWL |
| | Gross Vehicle Weight |
| F | Operational Full Width |
| 16.0m | Minimum Operational Width |
| 4 | Point Load Front / Rear |

machines 24.5m (120kg) T48P T50JB 20.0m 6.5m Manufacturer 10.5m Bronto 3.7m 2 5m 2.47m x 1.05m 600kg 18000kg 6.2m 2.8m 150kN / 150kN





0345 745 0000 nationwideplatforms.co.uk

| Working Height | 48.0 |
|--------------------------------|-------|
| Outreach** | 28.0 |
| Max Horiz Outreach (full S\ML) | 22 0m |

0m 0m (100kg)

IPAF 1b

JIB

machines T50JB

Alternative


| IVIAX HONZ. OULIEACH (IUII SVVL) | 22.011 | M |
|----------------------------------|--------------------|---|
| Max Reach Below 0m | 13.5m | |
| Overall Travel Length | 10.4m | P |
| Overall Travel Height | 4.0m | |
| Overall Travel Width | 2.55m | |
| Platform Cage Size (extended) | 2.15(3.8)m x 1.05m | |
| Max SWL | 600kg | |
| Gross Vehicle Weight | 17600kg | |
| Operational Full Width | 6.3m | |
| Minimum Operational Width | 2.55m | |
| Point Load Front / Rear | 160kN / 160kN | |
| | | |

i 4 🕶 🕒 🧷

Nanufacturer Palfinger

48.0m

28.0m



XNationwide Platforms A LOXAM Company

T50JB

truck mounts

Alternative

Manufacturer Bronto

machines

T58B T48P

T56B

T56B-XR

truck mounts

56.0m




| | | 11.000 |
|---|-------------------------------|------------------|
| | Overall Travel Length | 12.0m |
| | Overall Travel Height | 4.0m |
| | Overall Travel Width | 2.5m |
| | Platform Cage Size (extended) | 2.2(3.7)m x 0.9m |
| | Max SWL | 600kg |
| 2 | Gross Vehicle Weight | 26000kg |
| | Operational Full Width | 8.0m |
| | Minimum Operational Width | 2.8m |
| | Point Load Front / Rear | 190kN / 190kN |

50.0m



8 4 0 4 8



0345 745 0000 nationwideplatforms.co.uk

Depending on load, angle of rotation and outrigger configuration

24 28 32 36 40


| Working Height | 56 |
|----------------|----|
| Outreach** | 37 |

.0m Alternative machines .3m (20

| | machines |
|------|----------|
| 0kg) | T50JB |
| | |

| Max Horiz. Outreach (full SWL) | 32.0m | |
|--------------------------------|------------------|----|
| Max Reach Below 0m | 9.0m | M |
| Overall Travel Length | 11.9m | Br |
| Overall Travel Height | 3.7m | |
| Overall Travel Width | 2.5m | |
| Platform Cage Size (extended) | 2.4(3.7)m x 1.0m | |
| Max SWL | 600kg | |
| Gross Vehicle Weight | 26000kg | |
| Operational Full Width | 9.0m | |
| Minimum Operational Width | 3.0m | |
| Point Load Front / Rear | 180kN / 180kN | |
| | | |

lanufacturer Bronto



XNationwide Platforms A LOXAM Company



T58R

truck mounts

Alternative

Manufacturer

machines

T70B

T66M-1 T56B

Ruthman

1

T70B

truck mounts


70.0m

Working Height 58.0m Outreach** 38.0m (100kg)

| | Max Horiz. Outreach (full SWL) | 31.0m |
|-----|---|------------------|
| Ę | Max Reach Below 0m | 6.0m |
| 58. | Max Reach Below 0m Overall Travel Length | 11.7m |
| | Overall Travel Height | 3.99m |
| | Overall Travel Width | 2.55m |
| | Platform Cage Size (extended) | 2.3(3.6)m x 0.9m |
| | Max SWL | 500kg |
| | Gross Vehicle Weight | 26000kg |
| | Operational Full Width | 9.67m |
| | Minimum Operational Width | 2.85m |
| | Point Load Front / Rear | 220kN / 220kN |
| | | |

38.0m

D




0345 745 0000 nationwideplatforms.co.uk

| Working Height | 70.0 |
|----------------|------|
| Outreach | 34.8 |

Alternative m machines **m** (120kg) T70B-XR T90B Max Horiz, Outreach (full SWL) 30.0m

| Max Honz. Outcach (iui OWL) | 50.011 | 1000 |
|-------------------------------|------------------|------------------|
| Max Reach Below 0m | 6.0m | Manufacturer |
| Overall Travel Length | 12.5m | |
| Overall Travel Height | 4.2m | Bronto |
| Overall Travel Width | 2.5m | |
| Platform Cage Size (extended) | 2.4(3.7)m x 1.0m | |
| Max SWL | 600kg | Cage winch |
| Gross Vehicle Weight | 36000kg | option available |
| Operational Full Width | 8.0m | Extra capacity |
| Minimum Operational Width | 3.2m | basket available |
| Point Load Front / Rear | 255kN / 255kN | 2020 |
| | | |





XNationwide Platforms A LOXAM Company

34.8m

T70B-XR


truck mounts

T90B

truck mounts


90.0m

31.0m

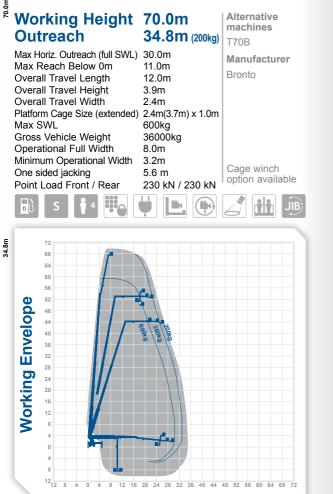

8 4 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 0345 745 0000 nationwideplatforms.co.uk

| Working Height Outreach** | 90.0m 31.0m (400kg) | Alternative machines |
|--|--------------------------------|--|
| Max Horiz. Outreach (full SWL) Max Reach Below 0m Overall Travel Length Overall Travel Height Overall Travel Width Platform Cage Size (extended) Max SWL Gross Vehicle Weight Operational Full Width Minimum Operational Width Point Load Front / Rear | 12.0m 15.6m 4.0m 2.5m | Manufacturer Bronto Cage winch option available |
| | | |



X Nationwide Platforms

Tracked Booms



- More than 130 available to hire on either operated or self-operated basis
- Can be operated
 with IPAF 1b license
- Allows access to restricted areas that traditional booms can't
- Lithium battery models
 are available

Machine type by product code

TB14HB TB14HE TB15HB TB15HE TB17HB TB17HE TB17HE TB20HB TB20HE TB20HE TB20HB TB26HB TB26HE TB30MB TB31TB

- Reduces the ground bearing pressure on soft ground and delicate flooring
- Allows greater stability for work on uneven surfaces
- Easily transportable
- Can be used for a variety of applications including facilities management and retail
- Working heights up to 31m



0345 745 0000 nationwideplatforms.co.uk

X Nationwide Platforms

TB14HB

tracked booms

Alternative

machines

TB14HE

TB17HE

TB17HB

Hinowa

Manufacturer

TB14HE


tracked booms

Working Height 14.0m Horizontal 7.0m Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

| 7.011 |
|-----------------------|
| 4.06m 1.99m |
| 0.78m |
| 1.33m x 0.69m 360° |
| 200kg 1750kg |
| 2.7m x 2.7m 2.7m |
| |





0345 745 0000 nationwideplatforms.co.uk

Working Height 14.0m Horizontal 7.0m Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width


14.0m 7.0m 4.06m 1.99m 0.78m 1.33m x 0.69m 360° 200kg 1750kg

2.7m x 2.7m

2

2.7m

Alternative machines TB14HB TB17HE TB17HB Manufacturer Hinowa



X Nationwide Platforms

TB15HB

tracked booms

Alternative

machines

TB15HE

TB17HF

TB17HB

Hinowa

Manufacturer

TB15HE


tracked booms

Working Height15.4mHorizontal
Outreach
Closed Length6.6m4.02m

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

| 6.6M |
|------------------------|
| 4.02m 1.99m |
| 0.75m 1.33m x 0.69m |
| 360° |
| 230kg 1950kg |
| 2.8m x 2.8m 2.8m |





0345 745 0000 nationwideplatforms.co.uk

Working Height15.4mHorizontal6.6mOutreach6.10m


Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

15.4m **6.6**m 4.02m 1.99m 0.75m 1.33m x 0.69m 360° 230kg 1950kg

2.8m x 2.8m

2.8m

Alternative machines TB15HB TB17HE TB17HB Manufacturer Hinowa



X Nationwide Platforms



TB17HB

tracked booms

Alternative

machines

TB17HE

TB20HF

TB20HB

Hinowa

Manufacturer

TB17HE

tracked booms

Working Height 17.06m Horizontal **Outreach** Closed Length

Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

Dua

| 7.5m |
|----------------------------------|
| 4.52m 2.0m |
| 0.79m 1.33m x 0.69m 360° |
| 230kg 2280kg 2.88m x 2.89m |
| 2.88m |

IPAF 1b 18 16 14 Envelope 17.06m 10 Ĥ Working 7.5m É 0 2 2 12 6 Δ 0 2 4 6 8 10 14

0345 745 0000 nationwideplatforms.co.uk

Working Height 17.06m Horizontal 7.5m Outreach


Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight **Outrigger Footprint** Min Op Width

4 52m 2.0m 0.79m 1 33m x 0 69m 360° 230kg 2280kg 2.88m x 2.89m

2.88m

Alternative machines TB17HB TB20HF TB20HB Manufacturer Hinowa

1PAF



XNationwide Platforms A LOXAM Company

TB18PB

tracked booms

Alternative

machines

TB17HE

TB20HF

TB20HB

Hinowa

10 12 14

Manufacturer

TB20HB

tracked booms

Working Height 17.6m **Horizontal Outreach** Closed Length

Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

10

0

2

6 Δ 2

0 2 Δ 6 8


0345 745 0000

nationwideplatforms.co.uk

Working

9.2m

| 9.2m | |
|--|--|
| 5.21m 1.95m | |
| 0.78m 1.3m x 0.7m 360° 200kg 2350kg 3.1m x 3.1m 3.1m | |



Working Height 20.1m 9.7m Horizontal Outreach


Closed Length **Closed Height** Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

Dua

5 01m 1.99m 0.79m 1 33m x 0 69m 360° 230kg 2880kg 2.92m x 2.92m 2.92m

Alternative machines TB26HE TB26HB TB20HF Manufacturer Hinowa

1PAF



XNationwide Platforms A LOXAM Company

TB20HE

tracked booms

TB20JB

tracked booms

Working Height 20.1m Horizontal 9.7m Outreach Closed Length 5.01m


Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

| 9.7m | |
|--------------------------------|--|
| 5.01m 1.99m | |
| 0.79m 1.33m x 0.69m 360° | |
| 230kg 2880kg | |
| 2.92m x 2.92m 2.92m | |

machines TB26HE TB26HB TB17HB TB20HB Manufacturer Hinowa

Alternative

x 2.92m



0345 745 0000 nationwideplatforms.co.uk

Working Height 20.1m Horizontal 9.7m Outreach


Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

Dual

20.1m 9.7m 5.01m 1.99m 0.79m 1.33m x 0.69m 360° 230kg 2880kg 2.92m x 2.92m 2.92m

machines TB26HE TB26HB TB17HB TB20HB Manufacturer Hinowa

Alternative



Xationwide Platforms

TB26HB

tracked booms

Alternative

Manufacturer

machines

TB26HE

Hinowa

TB26HE

tracked booms

Working Height 25.7m Horizontal 13.6m **Outreach**

Closed Length **Closed Height** Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

2

0

2

4 <u>⊾</u> 6

2 0 2

Δ

6 34m 1.98m 0.99m 1 33m x 0 69m 360° 230kg 4415kg 4.07m x 3.97m 3.97m

HE I

12 14 16


18 20 22 24 26

6 8 10

0345 745 0000

nationwideplatforms.co.uk

Δ



1PAF

Working Height 25.7m Horizontal Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight **Outrigger Footprint** Min Op Width

13.6m

1 33m x 0 69m

4.07m x 3.97m

6 34m

1.98m

0.99m


360°

230kg

4415kg

3.97m

Alternative machines TB26HB Manufacturer Hinowa



XNationwide Platforms A LOXAM Company



TB30MB

| tracked | |
|---------|---|
| booms | 5 |

Alternative

Manufacturer

machines

TB31TB

Multitel

TB31TB

tracked booms


31.0m

4.7m

Working Height 30m Horizontal 14m Outreach

| Closed Length | |
|-----------------------------|--|
| Closed Height | |
| Closed Width | |
| Platform Size (extended) | |
| Rotation | |
| Max SWL | |
| Weight | |
| Min Op Width | |

14m 6.65m 2.3m 1.6m 0.70m x 1.60m (4.2m) 400° 270kg 5600kg 3.3m



0345 745 0000 nationwideplatforms.co.uk

Working Height 31.0m Horizontal 14.7m Outreach

Closed Length Closed Height Rails Up / Fixed Rails Closed Width DeckSize Rotation SWL Weight Outrigger Footprint Min Op Width

Dual

31.0m 14.7m 7.23m 1.98m 1.58m 1.20m x 0.80m 360° 250kg 4350kg 5.45m x 5.15m 2.75m

machines TB26HB TB26HE

Alternative

Manufacturer Teupen

IPAF 1b

36 34 32 30 28 Envelope 26 24 22 20 18 80K9 250Kg 16 Working 14 12 10 8 4 2 0 2 6 4 2 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32

Telehandlers



0345 745 0000 nationwideplatforms.co.uk

- Access to the UK's largest fleet of telehandlers
- Full range from compact 4m machines to 30m rotational telehandlers
- Rough terrain forklift
- Ideal for lifting heavy materials to height

| Machine type by produ | ict code |
|-----------------------|------------|
| JCB520-40 | JCB535-140 |
| JCB520-50 | HTL4017 |
| JCB525-60 | JCB540-170 |
| JCB531-70 | JCB540-200 |
| JCB3070 | MRT2150 |
| JCB926 | ROTO6024 |
| JCB533-105 | MRT2540 |
| JCB535-125 | ROTO4026 |
| HTL4014 | ROTO4030 |
| | |



JCB520-40

telehandlers

Max Lift Height **4.0m** 2.59m **Max Forward** Reach **Overall Length**

Manufacturer JCB



nationwideplatforms.co.uk

D RT⁴

Overall Height


Overall Width

Max Capacity

Weight

Max Lift Capacity (full reach)

Outside Turn Radius



XNationwide Platforms

A LOXAM Company

2.92m

1.97m

1.56m

2000kg

1000kg

4400kg

3.05m

JCB520-50

telehandlers

JCB

Manufacturer

JCB525-60

telehandlers

JCB

Manufacturer

Max Lift Height 5.0m **Max Forward** Reach **Overall Length** 3.08m


| Overall Height | 2.12m |
|-----------------------------------|--------|
| Overall Width | 1.84m |
| Max Capacity | 2000kg |
| Max Lift Capacity (full reach) | 750kg |
| Weight | 4870kg |
| Outside Turn Radius | 3.1m |
| | |

2.82m 2m 34m 00kg

D RT⁴

5.0m

2.82m




0345 745 0000 nationwideplatforms.co.uk

Max Lift Height 6.0m 3.06m **Max Forward** Reach

| Overall Length | 3.38m |
|-----------------------------------|--------|
| Overall Height | 1.89m |
| Overall Width | 1.84m |
| Max Capacity | 2500kg |
| Max Lift Capacity (full reach) | 1750kg |
| Weight | 5490kg |
| Outside Turn Radius | 3.71m |
| | |

D



XNationwide Platforms A LOXAM Company

JCB531-70

telehandlers

JCB3070

telehandlers

| Max Lift Height | 7.0m |
|-----------------|-------|
| Max Forward | 3.7m |
| Reach | |
| Overall Length | 4.38m |
| Overall Height | 2.40m |

| Overall Height | 2.4 |
|-----------------------------------|-----|
| Overall Width | 2.2 |
| Max Capacity | 350 |
| Max Lift Capacity (full reach) | 240 |
| Weight | 706 |
| Outside Turn Radius | 3.7 |
| | |

Manufacturer JCB

Max Lift Height **Max Forward** Reach **Overall Length**

| 7.0m | Ma |
|------|-----|
| 3.7m | JCI |

4 99m

2 49m

2 23m

3000kg

1250kg


6900kg

3 7m

nufacturer В

| Longui | 4.0011 |
|-----------------|--------|
| Height | 2.49m |
| Width | 2.23m |
| pacity | 3500kg |
| Capacity ch) | 2400kg |
| | 7060kg |
| Turn Radius | 3.7m |
| | |
| | |





0345 745 0000 nationwideplatforms.co.uk

D

Overall Height


Overall Width

Max Capacity

Weight

Max Lift Capacity (full reach)

Outside Turn Radius



XNationwide Platforms A LOXAM Company

JCB926

telehandlers

JCB

Manufacturer

JCB533-105


telehandlers

Max Lift Height7.67mMax Forward
ReachN/AOverall Length3.6mOverall Height2.57m

| | 2.57111 |
|-----------------------------------|---------|
| Overall Width | 2.2m |
| Max Capacity | 3000kg |
| Max Lift Capacity (full reach) | 2600kg |
| Weight | 5910kg |
| Outside Turn Radius | 4.49m |
| | |



7.67 n




0345 745 0000 nationwideplatforms.co.uk

| Max Lift Height | 10.2m |
|-----------------|-------|
| Max Forward | 6.83m |
| Reach | |

| Manufacturer |
|--------------|
| JCB |

| Reach | |
|-----------------------------------|--------|
| Overall Length | 4.38m |
| Overall Height | 2.49m |
| Overall Width | 2.29m |
| Max Capacity | 3300kg |
| Max Lift Capacity (full reach) | 1000kg |
| Weight | 8850kg |
| Outside Turn Radius | 3.7m |

■ RT⁴



JCB535-125 telehandlers

Manufacturer

JCB

HTL4014

telehandlers

Haulotte

Manufacturer


| Max Lift Height | 12.28m |
|-----------------|--------|
| Max Forward | 8.1m |
| Reach | |
| Overall Length | 5.8m |
| Overall Height | 2.59m |
| Overall Width | 2.35m |
| Max Capacity | 3500kg |

Max Lift Capacity 1150kg 10066kg Outside Turn Radius 3.75m



(full reach)

Weight




0345 745 0000 nationwideplatforms.co.uk

Max Lift Height 13.6m **Max Forward** 9.8m Reach

| Overall Length | 6.46m |
|-----------------------------------|--------|
| Overall Height | 2.6m |
| Overall Width | 2.43m |
| Max Capacity | 4000kg |
| Max Lift Capacity (full reach) | 1000kg |
| Weight | 10710g |
| Outside Turn Radius | 4.5m |
| | |

D



XNationwide Platforms A LOXAM Company

JCB535-140 telehandlers

HTL4017

telehandlers

Haulotte


Manufacturer

Max Lift Height 13.78m 9.7m **Max Forward** Reach **Overall Length** 6.23m

Overall Height Overall Width Max Capacity Max Lift Capacity (full reach) Weight 11090kg Outside Turn Radius 4.1m

2.59m 2 35m 3500kg 1250kg Manufacturer

JCB



2 0

0

2

6

1500kg 500kg 200kg 7 0 0

0345 745 0000 nationwideplatforms.co.uk

2

6 8


Δ

10 12

| Max Lift Height | 16.7m |
|-----------------|-------|
| Max Forward | 12.9m |
| Reach | |

| Overall Length | 6.65m |
|-----------------------------------|---------|
| Overall Height | 2.6m |
| Overall Width | 2.43m |
| Max Capacity | 4000kg |
| Max Lift Capacity (full reach) | 700kg |
| Weight | 12000kg |
| Outside Turn Radius | 4.5m |
| | |

D



XNationwide Platforms A LOXAM Company

JCB540-170 telehandlers


JCB540-200


telehandlers

| Max Lift Height | 16.7m |
|-------------------|--------|
| Max Forward | 12.5m |
| Reach | |
| Overall Length | 6.36m |
| Overall Height | 2.69m |
| Overall Width | 2.44m |
| Max Capacity | 4000kg |
| Max Lift Capacity | 2500kg |

(full reach) Weight

Manufacturer JCB






0345 745 0000 nationwideplatforms.co.uk

| Max Lift Height Max Forward Reach | 20.0m 15.9m | Manufacturer JCB |
|---|----------------|---------------------|
| Overall Length | 6.81m | |
| Overall Height | 2.72m | |

| ovoran morgine | E. / E |
|-----------------------------------|---------|
| Overall Width | 2.44m |
| Max Capacity | 4000kg |
| Max Lift Capacity (full reach) | 200kg |
| Weight | 12985kg |
| Outside Turn Radius | 4.1m |



XNationwide Platforms A LOXAM Company

15.9m

MRT2150

(full reach)

Weight

telehandlers

Manitou

Manufacturer

ROTO6024

telehandlers


Merlo

Manufacturer

Max Lift Height **Max Forward** Reach **Overall Length Overall Height** Overall Width Max Capacity Max Lift Capacity

20.6m 18.1m

6.78m 3.05m 2.43m 4999kg 600kg 16095kg Outside Turn Radius 4.04m




0345 745 0000 nationwideplatforms.co.uk

| Max Lift Height | 23.9m |
|-----------------|--------|
| Max Forward | 20.8m |
| Reach | |
| Overall Length | 7.43m |
| Overall Lleight | 0.1.00 |

| . im |
|--------|
| 49m |
| 000kg |
| 50kg |
| 3750kg |
| .5m |
| |





XNationwide Platforms A LOXAM Company

20.8m

MRT2540

24.6m

telehandlers

ROTO4026

telehandlers


Manufacturer Merlo

Max Lift Height 24.6m 18.5m **Max Forward** Reach **Overall Length** 7.82m **Overall Height** 3.05m Overall Width 2 43m Max Capacity Max Lift Capacity 400kg (full reach)

Manufacturer Manitou

Weight Outside Turn Radius 4.04m

4000ka 17165kg



0345 745 0000 nationwideplatforms.co.uk

Max Lift Height 26.0m 22.9m **Max Forward** Reach **Overall Length** 6.98m

| Overall Height | 2.95m |
|-----------------------------------|---------|
| Overall Width | 2.4m |
| Max Capacity | 4000kg |
| Max Lift Capacity (full reach) | 150kg |
| Weight | 16050kg |
| Outside Turn Radius | 6.85m |



XNationwide Platforms A LOXAM Company

26.0m 22.9m


ROTO4030

telehandlers

| - | Max Lift Height Max Forward Reach | 29.5m 25.5m |
|-------|---|----------------|
| 29.5m | Overall Length | 7.56m |
| 2 | Overall Height | 3.1m |
| | Overall Width | 2.49m |
| | Max Capacity | 4000kg |
| 25.5m | Max Lift Capacity (full reach) | 400kg |
| l'' | Weight | 19200kg |
| | Outside Turn Radius | 6.7m |

Manufacturer Merlo







0345 745 0000 nationwideplatforms.co.uk

Safety Solutions, Attachments & Accessories



Safety and Productivity Innovation

Available exclusively through Nationwide Platforms, our BlueSky innovations can help bring new levels of productivity and safety to your project.

- Available to hire and pre-fitted with all applicable
 Nationwide Platforms equipment
- Enables users to conform to contractor specific mandates surrounding key safety issues
- Material handling solutions designed to boost efficiencies and convenience whilst tackling risks associated with manual handling
- For bespoke solutions please speak to your account manager

Machine type by product code

| SkySiren® | SkyScreen™ |
|----------------------------|--------------------------|
| SkySiren [®] PCS™ | SkyRak Edge [™] |
| SkySentry™ | SkyTel |
| SkyRak® | SkyRakTether™ |
| SkyRakPlus® | SkyShield |
| SkyRakBoom [®] | Accessories |





0345 745 0000 nationwideplatforms.co.uk



SkySiren®

Nationwide Platforms' Secondary Guarding solution is the pioneering SkySiren®; designed to reduce the risks associated with entrapment. Not only does it stop the MEWP when an entrapment situation is detected, to prevent further crushing, it also has a flashing light and emergency klaxon to attract the attention of colleagues on the ground to enact the emergency lowering procedure without delay.

safety solution





The unique pressure sensitive system, acts as an 'emergency switch' in an entrapment situation. It is designed to react to the body pressure of an operator trapped against the boom lift's control panel.

The SkySiren® is a CE Certified retro-fit system capable of being fitted to most boom-type MEWPs.



Look for the SkySiren[®] icon to identify which machines can benefit from this unique attachment.

0345 745 0000 nationwideplatforms.co.uk

SkySiren[®] PCS[™]

safety solution

In addition to the pioneering SkySiren[®] Nationwide Platforms have introduced the next level in safe operating at height with SkySiren[®]PCS[™]. Working in concert with SkySiren[®], the SkySiren[®]PCS[™] attachment uses proximity sensing technology to help avoid entrapment situation occurring.



The continuous operation of proximity sensors built into the the SkySiren®PCS™ provides a sensing 'zone of protection', alerting the operator to potential hazards before they occur. The system has been designated as Intelligent Secondary Guarding.

The award winning design provides maximum protection, while at the same time not impeding either the MEWP's functionality nor the operators ability to carry out tasks. The SkySiren®PCS™ is CE Certified retro fit system capable of being fitted to most boom and scissor type MEWPs.



Look for the SkySiren®PCS™ icon to identify which machines can benefit from this unique attachement.

SkySentry[™]

safety solution

SkySentry[™] is a simple and effective fleet management system designed to help you reduce costs, drive efficiency and improve safety.





SkySentry[™] is a full service system designed to improve the management of your powered access fleet across multiple sites and safeguard against unauthorised use.

The system offers unrivalled access and visibility of not only who is operating a machine at any one time. But also if they are correctly trained and authorised to do so.



Look for the SkySentry icon to identify which machines can benefit from this feature.

0345 745 0000 nationwideplatforms.co.uk

SkyRak[®]

attachment

SkyRakPlus® attachment

Fits most small electric scissor lifts to enable the fast and safe installation of materials up to 150kg (300kg if fitted as double and MEWP capacity allows). Materials are securely fastened using the straps provided.






The unique design of the SkyRak[®] means the load weight is transferred to the platform floor, avoiding materials being rested on the non-load bearing hand-rails.

SkyRak[®] fits most small electric scissor lifts to enable the fast and safe installation of materials at height.



Look for the SkyRak[®] icon to identify which machines can benefit from this unique attachment.

SkyRakPlus[®] allows materials up to 600kg to be safely stored on most large decked diesel scissor lifts, with no weight put on the MEWP handrail.





A system of flexible heads support a wide variety of materials of many shapes and sizes including pipes, ducting, cladding, steelwork and bus bars.

When the MEWP is in motion, the materials are secured by use of moveable pins and straps.




Look for the SkyRakPlus® icon to identify which machines can benefit from this unique attachment.

0345 745 0000 nationwideplatforms.co.uk

SkyRakBoom[®] attachment

SkyRakBoom[®] allows the safe storage of materials up to 90kg in weight. Materials are stored with no weight on the MEWP's handrails.





Whilst the boom is in operation, materials are safely secured using the straps provided which significantly reduces the risk of materials falling to the ground.

SkyRakBoom[®] is suitable for installation to all standard Genie 6ft and 8ft 'boom-type' baskets.



Look for the SkyRakBoom[®] icon to identify which machines can benefit from this unique attachment.

SkyScreen[™]

attachment

Available on the majority of our boom lifts, SkyScreen[™] reduces the risk of items failing from the platform basket while also offering added protection to personnel and machines on the ground.





Velcro and magnetised fittings allow operators to assemble and remove quickly and efficiently and its design allows all normal cage operations to be unaffected. Additional features include being fire retardant and wind resistant up 6m/s.



Look for the SkyScreen[™] icon to identify which machines can benefit from this unique attachment.

0345 745 0000 nationwideplatforms.co.uk

SkyRak Edge[™] attachment

SkyTel

attachment

SkyRakEdge[™] is a lightweight material handling attachment designed to safely and securely handle scaffold tubes or lattice and ladder edge protection beams on boom type Mobile Elevated Work Platforms (MEWPs).





SkyRakEdge[™] securely holds up to 9 x scaffold tube 6m length, or 2 x 6m lattice beams, or 1 x 8m lattice beam^{*}

It reduces the risk of materials falling from height and removes excess tube weight on the handrails

* Subject to maximum payload



Look for the SkyRakEdge[™] icon to identify which machines can benefit from this unique attachment.

SkyTel from Nationwide Platforms is the latest innovation in safety and efficiency, reducing the need for the manual handling of antennas in the telecoms sector.





Provides a consistent, safe method of work for the installation and removal of antennas. Easily installed and removed in minutes.



Look for the SkyTel icon to identify which machines can benefit from this unique attachment.

0345 745 0000 nationwideplatforms.co.uk

SkyRakTether[™] attachment

SkyRakTether[™], the lightweight tested tethering post for Mobile Elevating Work Platforms utilises a bespoke tethering bag providing safe storage for all tethered tools allowing operators to work freely at height and reducing the risk associated with items falling from height.



- T
- Reduces the risk of tools falling from height
- Safe tool storage when not in use
- Improves productivity
- Complies with many Tier One company's tethering policies
- Complies with HSE guidance

Compatible with a wide range of booms and scissors type MEWPs.

SkyShield

attachment

SkyShield is a robust, lightweight screen providing maximum visibility and offers a safer working environment helping to provide COVID-19 protection





The lightweight aluminium frame holds a UV stable shatterproof polycarbonate barrier requires no tools to fit.

SkyShield is wind rated compliant and compatible with a range of vehicle mounted booms platforms including: GSR 22m, Ruthmann 28m (4x4) & 33m Bronto 38m, 50m, 56m, 70m, 90m – all with extending basket to 3.7m



Look for the SkyShield icon to identify which machines can benefit from this unique attachment.

0345 745 0000 nationwideplatforms.co.uk

attachment

Harness and Lanyards

IPAF strongly recommends that a full body harness with an adjustable lanyard (used to provide work restraint and adjusted to be as short as possible) is used when working from a boom type MEWP or vehicle mounted boom.

For more information from IPAF and details of their 'Clunk Click' harness campaign visit www.ipaf.org.

Harness and lanyards sets are available to purchase at the time of hire.

Wheel Covers and Nappies

Most electric machines are fitted with non-marking tyres, designed to minimise the risk of damaging finished floors. These machines are easily identified by the nonmarking tyre icon at the top of each page in the machine specification section of this brochure.

If a machine without non-marking tyres is required for work on a finished floor, wheel covers can be fitted to protect the flooring.

Lighting Frames and Camera Cages

Nationwide Platforms offers a variety of machines suitable for mounting lighting equipment and cameras, making them ideal for broadcast, cinema and other media applications.

| | D | | | |
|--|---|--|--|--|
|--|---|--|--|--|

For easy reference look out for the icons to identify which machines can be fitted with optional extras designed for media and broadcasting applications.

Key Pads

Key pads can be fitted to machines to minimise theft, unauthorised use of the machine and downtime caused by unscheduled equipment use. The key pads are programmable and weatherproof. Simply request a key pad when you place your order.

Pre-use Inspection Cards

Are your operators complying with the law each time they use powered access machines?

Regulations state that pre-use checks must be made before any operator uses an access platform, with users also required to make a record.

Our daily inspection cards have been designed to help powered access users conform to the law by acting as a comprehensive checklist and record of machine use.

Daily inspection sheets are now available to order with all hires.

Daily Machine Inspections

All of our powered access platforms are subject to extensive safety maintenance checks before they reach you. For extra peace of mind when machines are on your site for longer periods of work, we can also organise daily inspections by a qualified engineer from your local depot.

Please call today and ask for details on our pre-use inspection cards.

0345 745 0000 nationwideplatforms.co.uk

Accessories

Power to Platform

Most machines are fitted with a 110v socket at ground level that can be connected to your power source. Power is fed through an internal lead within the machine structure to the platform socket. Using this feature ensures that extension cables do not become trapped in the machine or dangle over buildings and other workers.



For easy reference look out for the icon to identify which machines have power to platform.

Onboard Generators

Many diesel powered machines also have an onboard generator which removes the need to hire a separate generator or have leads trailing from the machine across the workplace. Please request an onboard generator when ordering your machine.

+

Look out for the icon to identify the machines which can be hired with on board generators.

Chalwyn Valves

Chalwyn valves can be attached to a diesel engine air intake system. The valve is designed to safely shutdown the engine in the event of external vapours or gasses being sucked into the engine through the air intake.

In areas where there is a chance of vapour ignition a chalwyn valve will normally be specified by the site owner. Typical uses are in petrochemical plants and refineries including refurbishment of petrol station forecourts.

The valve can be fitted to all diesel scissor and boom lifts.

Please note: a minimum of 48 hours notice is required to fit the chalwyn valve.

Spark Arrestors

Spark arrestors are attached to the exhaust system of diesel machines to eliminate sparks from exiting the exhaust. Spark arrestors are usually specified by the site contractor or operator and are typically required on petrol station refurbishments, petrochemical plant works and refineries. Spark arrestors can be fitted on request, but must be fitted before the machine reaches site.

Please note: a minimum of 48 hours notice is required prior to delivery.

Earth Bonding

Nationwide Platforms has the UK's largest fleet of boom lifts fitted with earth straps that conform to National Grid specification. This continual safety link running from the platform to the ground safely deflects electric currents, protecting both the machine and its operator from electrocution.

Many site operators request earth bonding if the machine is to be used near live electrical apparatus in locations such as sub stations, power stations and live overhead cables.

Please remember to inform us at the time of booking if you require earth bonding on your machine.

0345 745 0000 nationwideplatforms.co.uk

Weight Conversion

Distance Conversion

| Metric | to Imperial .204 = lbs) | Imperial (lbs x 0.45 | |
|-----------------|----------------------------|-------------------------|-----------------|
| kg lbs | kg lbs | lbs kg | lbs kg |
| 500 - 1,102 | 27,000 - 59,524 | 1,000 - 453 | 54,000 - 24,493 |
| 1,000 - 2,204 | 27,500 - 60,627 | 2,000 - 907 | 55,000 - 24,947 |
| 1,500 - 3,306 | 28,000 - 61,729 | 3,000 - 1,360 | |
| 2,000 - 4,409 | 28,500 - 62,831 | 4,000 - 1,814 | |
| 2,500 - 5,511 | 29,000 - 63,933 | 5,000 - 2,267 | |
| 3,000 - 6,613 | 29,500 - 65,036 | 6,000 - 2,721 | |
| 3,500 - 7,716 | 30,000 - 66,138 | 7,000 - 3,175 | |
| 4,000 - 8,818 | 30,500 - 67,240 | 8,000 - 3,628 | |
| 4,500 - 9,920 | 31,000 - 68,343 | 9,000 - 4,082 | |
| 5,000 - 11,023 | 31,500 - 69,445 | 10,000 - 4,535 | |
| 5,500 - 12,125 | 32,000 - 70,547 | 11,000 - 4,989 | |
| 6,000 - 13,227 | 32,500 - 71,650 | 12,000 - 5,443 | |
| 6,500 - 14,330 | 33,000 - 72,752 | 13,000 - 5,896 | |
| 7,000 - 15,432 | 33,500 - 73,854 | 14,000 - 6,350 | |
| 7,500 - 16,534 | 34,000 - 74,957 | 15,000 - 6,803 | |
| 8,000 - 17,636 | 34,500 - 76,059 | 16,000 - 7,257 | |
| 8,500 - 18,739 | 35,000 - 77,161 | 17,000 - 7,711 | 1 · · · · |
| 9,000 - 19,841 | 35,500 - 78,264 | 18,000 - 8,164 | |
| | | | |
| 9,500 - 20,943 | 36,000 - 79,366 | 19,000 - 8,618 | |
| 10,000 - 22,046 | 36,500 - 80,468 | 20,000 - 9,071 | |
| 10,500 - 23,148 | 37,000 - 81,570 | 21,000 - 9,525 | |
| 11,000 - 24,250 | 37,500 - 82,673 | 22,000 - 9,979 | |
| 11,500 - 25,353 | 38,000 - 83,775 | 23,000 - 10,432 | |
| 12,000 - 26,455 | 38,500 - 84,877 | 24,000 - 10,886 | |
| 12,500 - 27,557 | 39,000 - 85,980 | 25,000 - 11,339 | |
| 13,000 - 28,660 | 39,500 - 87,082 | 26,000 - 11,793 | |
| 13,500 - 29,762 | 40,000 - 88,184 | 27,000 - 12,246 | |
| 14,000 - 30,864 | 40,500 - 89,287 | 28,000 - 12,700 | |
| 14,500 - 31,966 | 41,000 - 90,389 | 29,000 - 13,154 | 1 |
| 15,000 - 33,069 | 41,500 - 91,491 | 30,000 - 13,607 | |
| 15,500 - 34,171 | 42,000 - 92,594 | 31,000 - 14,061 | 1 |
| 16,000 - 35,273 | 42,500 - 93,696 | 32,000 - 14,514 | |
| 16,500 - 36,376 | 43,000 - 94,798 | 33,000 - 14,968 | |
| 17,000 - 37,478 | 43,500 - 95,900 | 34,000 - 15,422 | |
| 17,500 - 38,580 | 44,000 - 97,003 | 35,000 - 15,875 | 1 |
| 18,000 - 39,683 | 44,500 - 98,105 | 36,000 - 16,329 | |
| 18,500 - 40,785 | 45,000 - 99,207 | 37,000 - 16,782 | |
| 19,000 - 41,887 | 45,500 -100,310 | 38,000 - 17,236 | |
| 19,500 - 42,990 | 46,000 -101,412 | 39,000 - 17,690 | 1 |
| 20,000 - 44,092 | 46,500 -102,514 | 40,000 - 18,143 | |
| 20,500 - 45,194 | 47,000 -103,617 | 41,000 - 18,597 | |
| 21,000 - 46,297 | 47,500 -104,719 | 42,000 - 19,050 | |
| 21,500 - 47,399 | 48,000 -105,792 | 43,000 - 19,504 | |
| 22,000 - 48,501 | 48,500 -106,924 | 44,000 - 19,958 | |
| 22,500 - 49,603 | 49,000 -108,026 | 45,000 - 20,411 | |
| 23,000 - 50,706 | 49,500 -109,128 | 46,000 - 20,865 | |
| 23,500 - 51,808 | 50,000 -110,231 | 47,000 - 21,318 | |
| 24,000 - 52,910 | 50,500 -111,333 | 48,000 - 21,772 | |
| 24,500 - 54,013 | 51,000 -112,435 | 49,000 - 22,226 | |
| 25,000 - 55,115 | 51,500 -113,537 | 50,000 - 22,679 | |
| 25,500 - 56,217 | 52,000 -114,640 | 51,000 - 23,133 | |
| 26,000 - 57,320 | 52,500 -115,742 | 52,000 - 23,586 | |
| 26,500 - 58,422 | 53,000 -116,844 | 53,000 - 24,040 | 106,000- 48,081 |
| | | | |

| | Metric to | o Imperial | | Imner | ial to | Metric |
|--------------|-----------------------|---------------|-------------------|-------|--------|--------|
| | (m x 3. | 281 = ft) | | (ft x | | |
| m | ft | m | ft | ft | | m |
| 6.0 | - 19'8" | 39.5 - | 129'7" | 15 | - | 4.57 |
| 6.5 | - 21'4" | 40.0 - | 131'3" | 20 | - | 6.10 |
| 7.0 7.5 | - 23'0" - 24'7" | 40.5 - | 132'10" 134'6" | 25 | - | 7.62 |
| 8.0 | - 26'4" | 41.0 - | 136'2" | 30 | - | 9.14 |
| 8.5 | - 27'11" | 42.0 - | 137'10" | 35 | - | 10.67 |
| 9.0 | - 29'4" | 42.5 - | 139'6" | 40 | | 12.19 |
| 9.5 | - 31'2" | 43.0 - | 141'1" | 45 | | 13.72 |
| 10.0 | - 32'10" | 43.5 - | 142'9" | | | |
| 10.5 11.0 | - 34'6" - 36'1" | 44.0 - 44.5 - | 144'5" 146'0" | 50 | | 15.24 |
| 11.5 | - 30 1 | 44.5 - | 147'7" | 55 | - | 16.76 |
| 12.0 | - 39'5" | 45.5 - | 149'3" | 60 | - | 18.29 |
| 12.5 | - 41'0" | 46.0 - | 150'11" | 65 | - | 19.81 |
| 13.0 | - 42'8" | 46.5 - | 152'7" | 70 | - | 21.34 |
| 13.5 | - 44'3" | 47.0 - | 154'3" | 75 | - | 22.86 |
| 14.0 | - 45'11" - 47'7" | 47.5 - 48.0 - | 155'10" 157'6" | 80 | - | 24.38 |
| 14.5 15.0 | - 477 - 49'2" | 48.5 - | 159'1" | 85 | - | 25.91 |
| 15.5 | - 50'10" | 49.0 - | 160'9" | 90 | - | 27.43 |
| 16.0 | - 52'6" | 49.5 - | 162'5" | 95 | | 28.96 |
| 16.5 | - 54'1" | 50.0 - | 164'1" | 100 | - | 30.48 |
| 17.0 | - 55'9" | 50.5 - | 165'9" | 105 | | 32.00 |
| 17.5 | - 57'5" - 59'1" | 51.0 - | 167'4" 168'11" | | - | |
| 18.0 18.5 | - 591 | 51.5 - 52.0 - | 170'7" | 110 | - | 33.53 |
| 19.0 | - 62'3" | 52.5 - | 172'3" | 115 | - | 35.05 |
| 19.5 | - 63'11" | 53.0 - | 173'10" | 120 | - | 36.58 |
| 20.0 | - 65'7" | 53.5 - | 175'6" | 125 | - | 38.10 |
| 20.5 | - 67'3" | 54.0 - | 177'2" | 130 | - | 39.62 |
| 21.0 21.5 | - 68'11" - 70'7" | 54.5 - 55.0 - | 178'10" 180'6" | 135 | - | 41.15 |
| 21.5 | - 72'2" | 55.5 - | 182'1" | 140 | - | 42.67 |
| 22.5 | - 73'9" | 56.0 - | 183'9" | 145 | - | 44.20 |
| 23.0 | - 75'6" | 56.6 - | 185'4" | 150 | - | 45.72 |
| 23.5 | - 77'1" | 57.0 - | 187'0" | 155 | | 47.24 |
| 24.0 | - 78'9" | 57.5 - | 188'8" | 160 | | 48.77 |
| 24.5 25.0 | - 80'4" - 82'0" | 58.0 - 58.5 - | 190'3" 191'11" | | | |
| 25.5 | - 83'7" | 59.0 - | 193'7" | 165 | - | 50.29 |
| 26.0 | - 85'3" | 59.5 - | 195'2" | 170 | - | 51.82 |
| 26.5 | - 86'11" | 60.0 - | 196'9" | 175 | - | 53.34 |
| 27.0 | - 88'7" | 60.5 - | 198'6" | 180 | - | 54.86 |
| 27.5 | - 90'3" | 61.0 - | 200'1" | 185 | - | 56.39 |
| 28.0 28.5 | - 91'9" - 93'6" | 61.5 - 62.0 - | 201'9" 203'5" | 190 | - | 57.91 |
| 20.0 | - 95'1" | 62.5 - | 205'0" | 195 | - | 59.44 |
| 29.5 | - 96'9" | 63.0 - | 206'8" | 200 | - | 60.96 |
| 30.0 | - 98'4" | 63.5 - | 208'3" | 205 | - | 62.48 |
| 30.5 | - 100'1" | 64.0 - | 209'11" | 210 | - | 64.01 |
| 31.0 | - 101'10" | 64.5 - | 211'8" | 215 | - | 65.53 |
| 31.5 32.0 | - 103'5" - 105'0" | 65.0 - | 213'3" 214'11" | 220 | - | 67.06 |
| 32.5 | - 106'8" | 66.0 - | 216'6" | 220 | | |
| 33.0 | - 108'3" | 66.5 - | 218'3" | | - | 68.58 |
| 33.5 | - 109'11" | 67.0 - | 219'10" | 230 | - | 70.10 |
| 34.0 | - 111'7" | 67.5 - | 221'6" | 235 | - | 71.63 |
| 34.5 | - 113'2" | 68.0 - | 223'1" | 240 | - | 73.15 |
| 35.0 35.5 | - 114'10" - 116'6" | 68.5 - | 224'9" 226'4" | 245 | - | 74.68 |
| 36.0 | - 118'1" | 69.5 - | 228'0" | 250 | - | 76.20 |
| 36.5 | - 119'9" | 70.0 - | 229'8" | 255 | - | 77.72 |
| 37.0 | - 121'5" | 70.5 - | 231'4" | 260 | - | 79.24 |
| 37.5 | - 123'0" | 71.0 - | 232'11" | 265 | - | 80.77 |
| 38.0 38.5 | - 124'8" - 126'4" | 71.5 - | 234'7" 236'2" | 270 | - | 82.30 |
| 38.5 | - 126 4 - 127'11" | 72.0 - 72.5 - | 236 2 237'5 | 275 | - | 83.82 |
| 00.0 | | 1.2.0 | | 210 | | 00.02 |

PLEASE NOTE:

All technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the full manufacturer specification or equipment user guides.

All information provided is subject to alteration and amendment without prior notice. Please contact Nationwide Platforms for confirmation of machine performance and specification when placing your order.

NWP 694 V02 - 2021 ©

X Nationwide Platforms A LOXAM Company