



0345 745 0000
nationwideplatforms.co.uk

Powered Access Selection Guide

 **Nationwide
Platforms**
A **LOXAM** Company

**Welcome to our powered access selection guide.
Inside you'll find all the information you need to
begin working safely and effectively at height.**

To get you started we've included comprehensive guidance on our leading product range, as well as advice on the accessories, innovations and training that'll help you succeed on your next task or project.

Remember, if you want to get in touch with us at any point whilst you're browsing, you can give us a call with any enquiries, feedback or hire requests.

0345 745 0000
nationwideplatforms.co.uk



How to use this Product Selection Guide



























This guide is designed to help you select and order the correct piece of equipment for your needs.


Each section is conveniently separated by product type and machines are arranged in order of ascending height.

The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on **0345 745 0000**

Key Standard features

 Battery power	 Tracked
 Diesel power	 Mast boom
 Lithium battery	 Articulating boom
 Hybrid power	 Straight telescopic boom
 Dual fuel option	 Non-marking tyres
 Gas power option	 Outrigger legs
 Rough terrain (2 wheel drive)	 Maximum people in cage*
 Rough terrain (4 wheel drive)	 Push around vehicles
 IPAF licence type	 Operator powered
 IPAF licence type	 Indoor use only
 IPAF licence type	 Self drive
 IPAF licence type	 JIB rotation
 IPAF licence type	 IPAF driving licence type

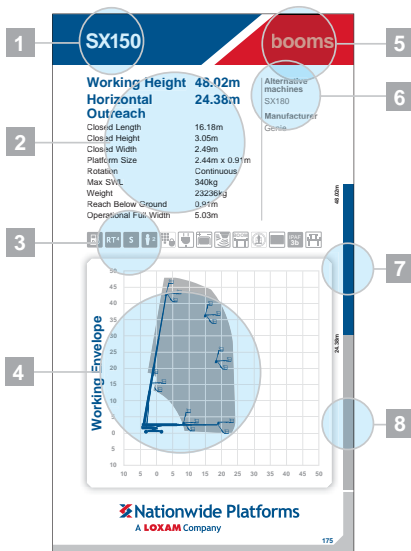

Height and outreach

 Working height

 Horizontal outreach

Optional extras

 SkySiren®	 SkyScreen™
 SkySiren® PCS™	 MHA Material Handling Attachments
 SkySentry™	 Power to platform
 SkyRak®	 Generator
 SkyRakPlus®	 Camera pod
 SkyRakBoom®	 Circular camera cage
 SkyTel™	 Wendy lighting frame
 SkyRakEdge™	 SkyRakMulti™

* Two numbers refer to indoor or outdoor use, call us for details

1 Product Code

Unique reference number for product.

(Please note this will not necessarily correspond with the original manufacturer's model number or product code)

2 Specification

These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.

3 Key

These symbols indicate standard features and optional extras available to hire with the platform. See left for key table.

4 Working Envelope

This shows the area of working space provided by the product.

5 Product Type

Indicates classification of powered access unit, e.g. machine types: low level access, scissor lift, boom lift, truck or van mounted platform, specialist boom or telehandler.

6 Alternative Machines

Indicates alternative or similar machines.

7 Working Height

The blue column indicates the safe operating vertical height.

8 Horizontal Outreach

The grey column indicates the safe operating outreach.

For all the latest news, promotions, guidance and more, why not check out our social media channels?



Join us on

[LinkedIn.com/NationwidePlatforms](https://www.linkedin.com/company/nationwideplatforms)



Like us on

[Facebook.com/NationwidePlatforms](https://www.facebook.com/NationwidePlatforms)



Follow us on Twitter

[@NWPlatforms](https://twitter.com/NWPlatforms)



Watch our latest videos on

[YouTube.com/NationwidePlatforms](https://www.youtube.com/NationwidePlatforms)

You can also sign up to receive exclusive promotions and our headline news by visiting:
nationwideplatforms.co.uk/keepintouch



IPAF Rental+ provides assurance to customers at every stage of the MEWP hire/rental process.

Known in the industry as the independent quality mark for powered access hire companies, IPAF Rental+ is awarded to those who meet the most stringent standards of training, advice, equipment and customer satisfaction set by a committee of the most experienced players in the powered access rental business.

The Gold standard means Nationwide Platforms has displayed exemplary standards recognised by IPAF as a company who provides significant investment to go above and beyond the minimum standard.



**Nationwide
Platforms** has
been awarded
with **Gold
IPAF Rental+**



**THE HIGHEST
STANDARD IN
POWERED ACCESS
EQUIPMENT HIRE**

**Working
at height or
supporting those
who are?** Find the
solutions you need by
visiting our website
for information on our
hire fleet, training services,
safety innovations and more!



Contents

Use this guide to find your perfect powered access solution.

Each section in this guide has been created to allow you to browse, select and order your ideal machine, attachments and accessories.

Information	4 - 16
Location	4 - 6
Safety	7
Regulations	8 - 9
Equipment Selection	10 - 11
Training	12 - 13
Indemnity	14
Service & Hire Options	15
Equipment Sales	16

Product Specification**17 - 260**

Low Level Access

17 - 32

Scissor Lifts

33 - 96

Boom Lifts

97 - 164

Van Mounted

165 - 170

Truck Mounted

171 - 206

Tracked Boom Lifts

207 - 224

Telehandlers

225 - 244

Safety Solutions,
Attachments & Accessories

245 - 260

Useful Data**261 - 269**

Distance Conversion

261

Weight Conversion

262

Index

By Product Code

263 - 265

By Machine Type

266 - 269

Location

Supporting you at every height

With a fleet of more than 15,500 platforms available to hire across the UK, you can be sure that your perfect solution is never too far away.



SCOTLAND & NORTH EAST

ABERDEEN

Cairnrobin Pipeyard
Portlethen
Aberdeen
AB12 4SB

DUNDEE

6 Faraday Street
Dryburgh Industrial
Estate,
Dundee
DD2 3QQ

GLASGOW

**Customer
Service Centre**

Tel. 0845 600 1490

Unit B East Point
13 Melford Road
Righead Ind Estate
Bellshill
Glasgow
ML4 3LR

GLASGOW CITY

45 Methil Street
Glasgow
G14 0AG

EDINBURGH

Unit 6D
Uphall Business Park
Loaning Hill,
Broxburn
West Lothian
EH52 5NT

MIDLANDS & THE NORTH

BARNSELEY

Unit 3
The Recovery Centre
Wakefield Rd
Barnsley
S71 1NU

BIRMINGHAM

**Customer
Service Centre**

Tel. 0845 600 1492

Willenhall Road
Darlaston
Wednesbury
West Midlands
WS10 8JG

BLACKBURN

New Trees Garage
Myerscough Road
Mellor Brook,
Blackburn
BB2 7LB

DURHAM

**Customer
Service Centre**

Tel. 0845 600 1496

Damson Way
Dragon Ville
Industrial Estate
Durham
DH1 2YN

LEEDS

Tel. 0845 600 1491

Old Run Road
Unit 1, Blackburn
Works, Hunslet
Leeds
LS10 2AA

LEICESTER

Unit 10-11
Arkwright Hill Farm
Lutterworth Road
(A426) Nr Cosby,
LE9 1RH

LIVERPOOL

Knowsley Industrial
Estate, Yardley Road
Kirkby, Liverpool
L33 7SS

NORTH WALES

Castle Close
Hawarden Industrial
Park, Hawarden,
Deeside
CH5 3QZ

NOTTINGHAM

Unit 21
Hazelford Way
Newstead
NG15 0DQ

SALFORD

2-4 Worrall Street
Salford, Manchester
M5 4TH

SCUNTHORPE

7 Atkinson Way
Foxhill Industrial
Estate, Scunthorpe,
DN15 8QJ

STOCKTON ON TEES

1 Hurricane Court
Stockton-on-Tees
TS18 3TL

TEBAY

Unit 1, The Sidings
Tebay, Penrith
CA10 3XR

TELFORD

8 Halesfield Road
Madeley, Telford
TF7 4PL

Location

WARRINGTON

**Customer
Service Centre**

Tel. 0845 600 1491

Unit D, Appleton
Industrial Park
Barleycastle Lane
Appleton Thorn
Warrington
WA4 4QT

WELLINGBOROUGH

Sidegate Lane
Wellingborough
Northants
NN8 1RN

SOUTH WEST & SOUTH WALES

AVONMOUTH

Victoria Road
Avonmouth
Bristol
BS11 9DB

DIDCOT

Hawksworth
Industrial Estate
Didcot, Oxfordshire
OX11 7HR

BRISTOL

**Customer
Service Centre**

Tel. 0845 600 1494

Cumberland House
Ashton Gate
Marsh Road,
Bristol
BS3 2NA

CARDIFF

Tel. 0845 600 1494

Castle Works
East Moors Road
Cardiff
CF24 5NN

LISKEARD

**Customer
Service Centre**

Tel. 0845 600 1495

Moorswater Industrial
Estate, Liskeard
Cornwall
PL14 4LB

SWANSEA

Unit 8 RVB Park
Carnffrwd Way
Enterprise Park
Swansea
SA6 8QD

SOUTHAMPTON

Claylands Road
Industrial Estate
Bishops Waltham
SO32 1BH

TAUNTON

Venture Way
Priorswood Industrial
Estate, Taunton
Somerset
TA2 8DE

SOUTH EAST

BRENTWOOD

Childerditch
Industrial Park
Childerditch Hall Drive,
Brentwood
CM13 3HD

KENT

Plot 1, Thameside
Terminal, Cliffe
Nr Rochester
Kent
ME3 7SU

LONDON EAST

**Customer
Service Centre**

Tel. 0845 600 1493

6 Oliver Road
West Thurrock
Essex
RM20 3ED

LONDON EAST

Plot 4, Riverside Ind
Estate, Oliver Close
West Thurrock
RM20 3EE

LONDON WEST

Wallingford Road
Uxbridge
UB8 2FR

LONDON WEST

West London
Industrial Park
Iver Lane, Cowley,
Uxbridge
UB8 2JG

LUTON

**Customer
Service Centre**

Tel. 01582 578074

Unit 12 Dencora Way
Sundon Park Ind
Estate, Luton,
LU3 3HP

NORWICH

Rookery Farm
Silver Street,
Besthorpe
Norwich
NR17 2LD

PETERBOROUGH

Skylift House
Newark Road,
Peterborough
PE1 5YD

Your safety, our priority.

At Nationwide Platforms, safety is always our number one priority.

That's why every single step we take to serve you has been designed with your welfare and wellbeing in mind.

We'd like to invite you to join our safety journey and see why you can always trust our products and services to provide the safeguard you need.



**YOUR SAFETY
OUR PRIORITY**




Regulations

Knowing your requirements

If you're working at height, it's important to understand the legislation and regulations which apply to you.

The Work at Height Regulations (2005) apply to all work at height where there is a risk of a fall liable to cause personal injury. These regulations are a key starting point for anyone responsible for individuals completing, supervising or planning work at height.

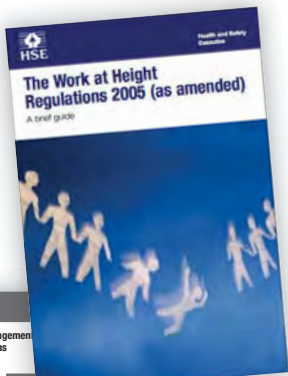

Scan the QR code or visit our website to learn more about the Work at Height Regulations (2005) & the legislation designed to keep you & your employees safe.

0345 745 0000



To help you work efficiently and safely at height Nationwide Platforms has a range of in depth guidance notes to aid understanding and implementation of best practice in the work place.

These useful and informative guides are available on line for you to download.



Scan the QR code or
visit our website to
download documents.

Equipment Selection

Considerations in selecting the right equipment for your task.

Before you get started, it's essential you make sure you have the right training to work safely and legally. See page 12 to learn more about our training services.

1

Height & Outreach

Do I need to reach a height straight up or do I need to reach up and then over?

For vertical access, scissor lifts may be best. When working over racking and shelving, mast booms are ideal. When working over obstacles, articulated booms provide a versatile solution.

2

Environment

Will I be working indoors or outdoors?

Use a zero emission electric machine indoors, and in general a diesel machine outdoors. For versatility, consider a dual fuel unit.

3

Terrain

What are the ground conditions I'll be working on?

If you're working indoors, consider non-marking tyres. On rough terrain select a four wheel drive option and select outriggers on sloping ground.

To help you find the ideal machine for your next job; visit our website and use our New to Platforms selector or call us on 0345 745 0000.

4

Access

Are there any access restrictions to entering the working environment?

Indoors, will machines pass through doorways and lift shafts? Does the site have plant weight restrictions?

5

Working height

How far up and how far out do I need to reach?

Always check the working envelope diagrams to ensure the outreach required can be achieved at the height(s) you need to carry out your task. Also consider that maximum working heights are assumed as 2m above the platform height (feet level).

6

Hire duration

How long do I need a machine for?

Self drive and other vehicle mounted platforms may suit short projects. We offer machine hires from one day to many years, as well as equipment for outright purchase.

Training



Training Courses

With more IPAF instructors, training centres and experience in delivering courses than anyone else, you can rely on us to get you trained and ready to work safely on your next project.

Our IPAF Operator courses are available to complete at training centres across the UK and can even be held on your own site.

IPAF Operator Courses

1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training



Training

Our complete range of training courses are ideal for anyone looking for advanced or specialist training.

Our additional range of training for powered access users includes:

IPAF MEWPs for Managers

The essential one day course for individuals managing, supervising or planning work at height

MEWPs for Managers

The essential one-day course for managers and supervisors



We also offer a complete range of courses accredited and approved by:



City & Guilds

PASMA



GREENCROSS TRAINING

CITB construction skills



Learn more about our complete range of training courses by viewing or downloading our full training guide.



Indemnity

PowerGuard

All our machines and equipment is hired out under the Construction Plant Hire Association Model Conditions for hiring of plant (July 2011). These terms and conditions place the responsibility on the hirer for any loss or damage of the equipment hired.

With the cost of loss and damage potentially running into thousands of pounds, PowerGuard offers a peace of mind indemnity to our hire customers.

Two levels of PowerGuard are available:

Gold (damage only) and **Platinum** (damage and loss).*

Protect yourself against costs of machine damage or loss



For more information on the advantages of our PowerGuard scheme or to add PowerGuard to your account, contact us on **0845 745 0000**.

Service & Hire Options

Whatever you're looking to achieve, we're proud to offer you a range of flexible hire & maintenance options.

Long term hire

In addition to our daily, weekly and monthly hire options, we can also offer long term agreements ideal for ongoing maintenance tasks and large projects.

Suitable for:

- Warehouse and logistics applications
- Long term maintenance and refurbishment projects
- Day to day facilities management tasks in retail, office, commercial and arena settings

Technical & maintenance services

In addition to providing adaptable maintenance packages for short and long term hires, we can also offer you technical support in managing your own fleet requirements.

For professional advice & guidance in selecting the most suitable solution for your needs contact us today

0345 745 0000


nationwideplatforms.co.uk

Equipment Sales

The UK's widest selection of new and used access platforms is available to buy now from Nationwide Platforms.

Whether you're seeking a unit from our leading fleet or looking for a brand new model direct from the manufacturer, we have the resources, expertise and know-how to find your perfect solution. We are also refurbishing units out of the fleet.

What's more, we also offer a range of finance and servicing packages.

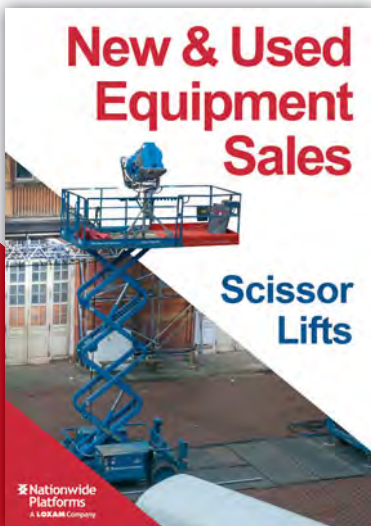

**New & Used
Equipment
Sales**

**Scissor
Lifts**

Nationwide
Platforms
A LOKAM Company



Booms

**For
Sale**



Trucks

**For
Sale**



Scan the QR code or visit our website to learn more about our latest models on sale and find out more about purchasing access equipment or call: 0808 100 3604

Low Level Access



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk

Low Level Access

- More than 1,000 units available to hire across the UK
- Working heights up to 9.5m
- Lightweight models from 180kg
- Non-marking tyres for use on finished floors

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**



Working Height 3.5m

Closed Length	0.98m
Closed Height	1.55m
Closed Width	0.75m
Platform Size	0.72m x 0.60m
Max SWL	150kg
Weight	180kg

Alternative machines

NANO


Manufacturer

POWER TOWERS

Indoor use only



Working Envelope

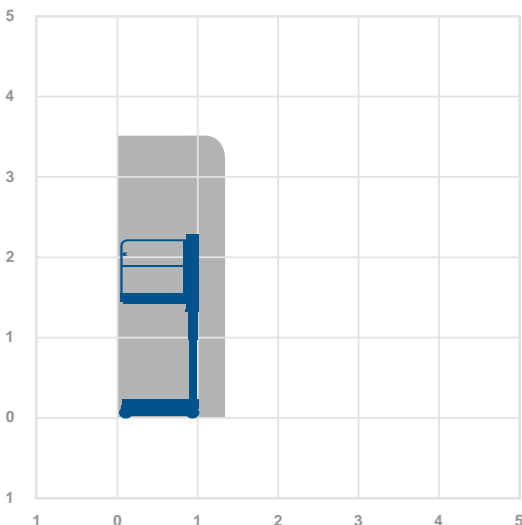

3.5m

We're also pleased to offer wind rated Pecolift models designed for use outdoors. Contact us today to learn more.

Working Height 4.5m

Closed Length	1.195m
Closed Height	1.56m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Max SWL	200kg
Weight	285kg

Alternative machines

Nano SP


Manufacturer

POWER TOWERS

Indoor use only



4.5m

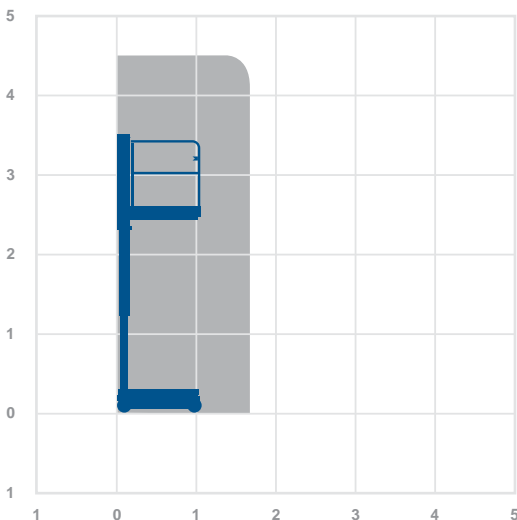Working Envelope**0345 745 0000****nationwideplatforms.co.uk**

Working Height 4.5m

Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	1.5m
Max SWL	200kg
Weight	506kg

Alternative machines


NANO
NANO SP+

Manufacturer

POWER TOWERS



Working Envelope

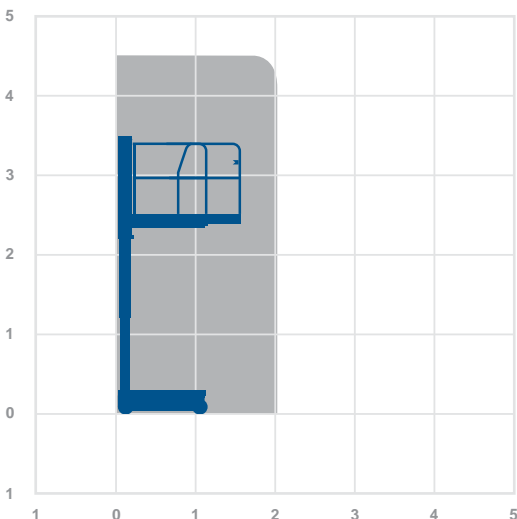

Your safety is always our priority.
Scan the QR code or visit our website to
learn more about our unique safety journey.



Working Height 4.5m

Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	2.0m
Max SWL	200kg
Weight	540kg

Alternative machines

NANO
NANO SP


Manufacturer

POWER TOWERS



4.5m

Working Envelope

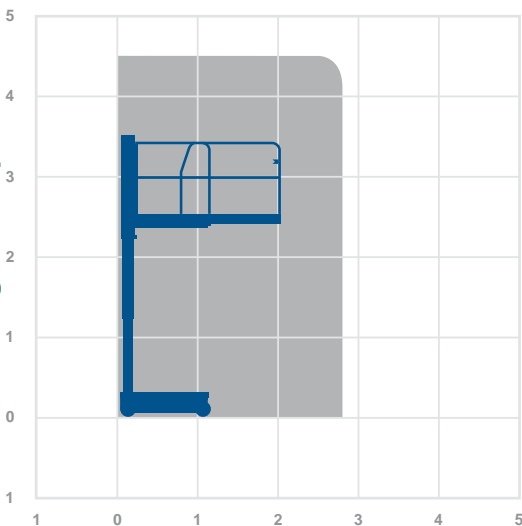

0345 745 0000

nationwideplatforms.co.uk

Working Height 5.1m

Closed Length	1.6m
Closed Height	1.92m
Closed Width	0.78m
Platform Size	1.52m x 0.65m
Max SWL	250kg
Weight	342kg

Alternative machines

NANO
NANO SP


Manufacturer

POWER TOWERS

Indoor use only



Working Envelope

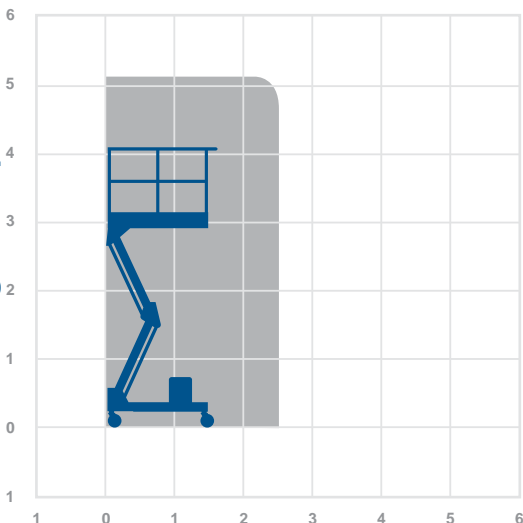

5.1m

Working Height 5.48m

Closed Length	1.37m
Closed Height	1.79m
Closed Width	0.77m
Platform Size	0.93m x 0.69m
Max SWL	227kg
Weight	782kg

Alternative machines

GR12
GR15


Manufacturer

Skyjack



5.48m

Working Envelope

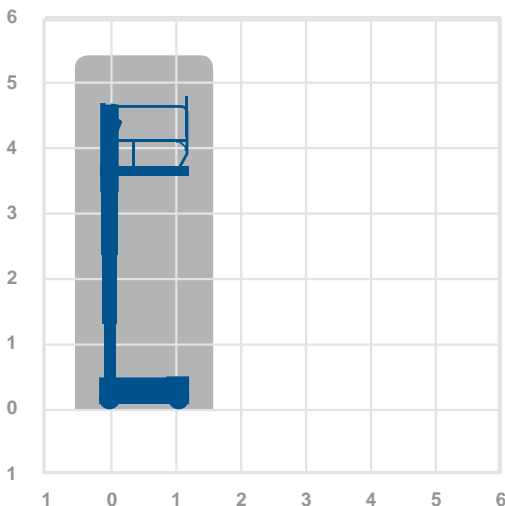

0345 745 0000

nationwideplatforms.co.uk


Working Height 5.58m

Closed Length	1.35m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.89m x 0.75m
Platform Length - deck extended	1.35m
Max SWL	227kg
Weight	862kg

Alternative machinesNANO SP
GR15**Manufacturer**

Genie

Indoor use only

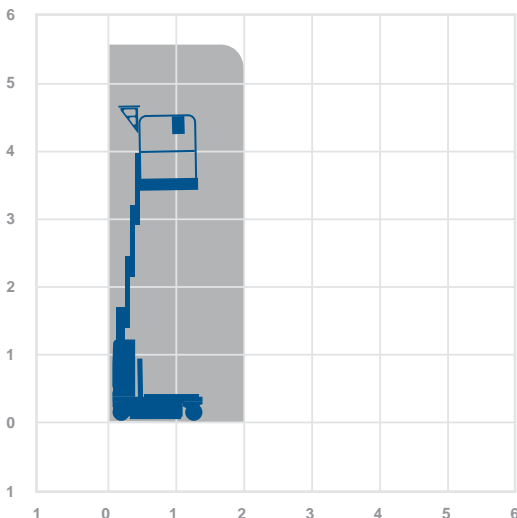**Working Envelope**

5.58m

1230ES

low level

Working Height 5.66m

Closed Length	1.36m
Closed Height	1.65m
Closed Width	0.76m
Platform Size	0.68m x 1.25m
Max SWL	230kg
Weight	790kg

Alternative machines

SJ16
SJ12
GR15
GR12

Manufacturer


JLG

Indoor use only



5.66m

Working Envelope

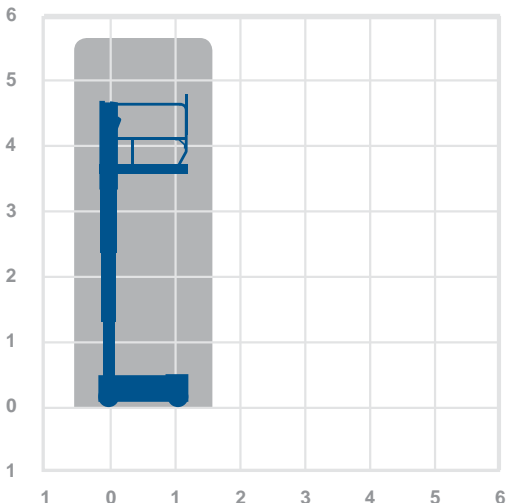

0345 745 0000

nationwideplatforms.co.uk

Working Height 6.62m

Closed Length	1.45m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.94m x 0.75m
Platform Length – deck extended	1.4m
Max SWL	227kg
Weight	1141kg

Alternative machines

GR20
GR12
NANO SP


Manufacturer

Genie

Indoor use only



Working Envelope

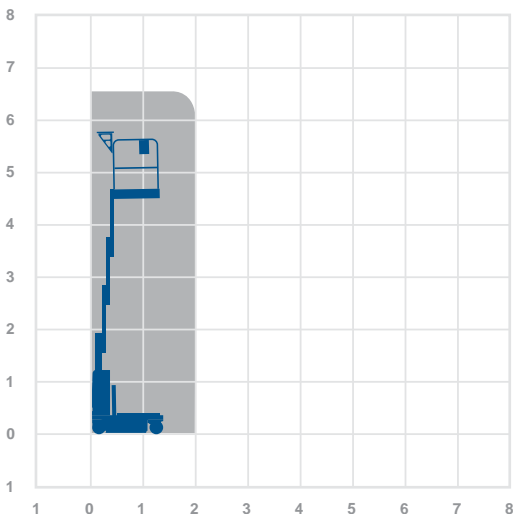

6.62m

Scan the QR code or visit our website to view the latest models on sale and find out more about purchasing access equipment.



Working Height 6.75m

Closed Length	1.37m
Closed Height	1.79m
Closed Width	0.77m
Platform Size	0.69m x 0.85m
Max SWL	227kg
Weight	971kg

Alternative machines

GR15
GR20
1230ES

Manufacturer


Skyjack

Indoor use only



6.75m

Working Envelope

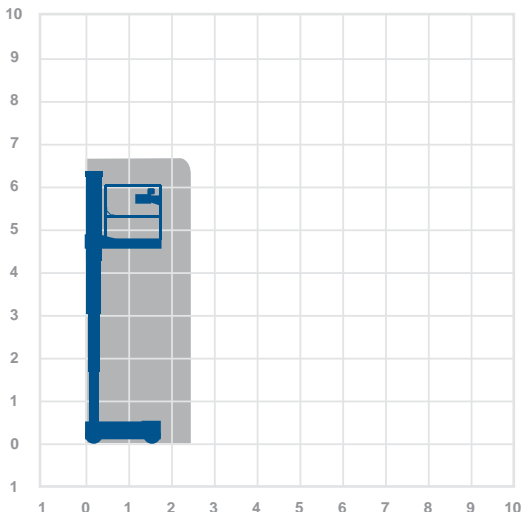

0345 745 0000

nationwideplatforms.co.uk

Working Height 7.85m

Closed Length	1.35m
Closed Height	1.98m
Closed Width	0.8m
Platform Size	0.89m x 0.75m
Platform Length – deck extended	1.4m
Max SWL	159kg
Weight	1264kg

Alternative machines

GR15
GS20
3219


Manufacturer

Genie

Indoor use only



Working Envelope

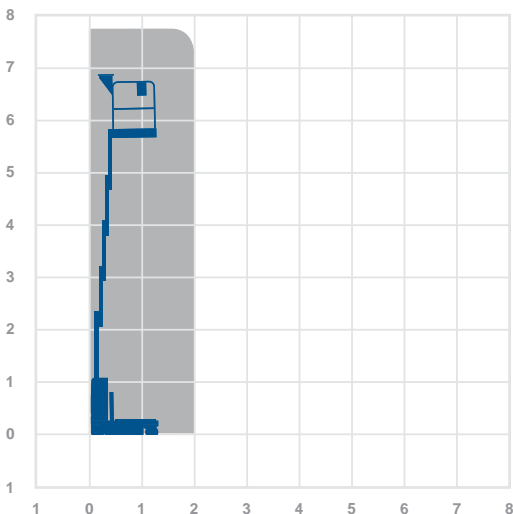

7.85m

Working Height 8.12m

Closed Length	1.27m
Closed Height	1.98m
Closed Width	0.74m
Platform Size	1.14m x 0.66m
Max SWL	159kg
Weight	347kg

Alternative machines

GP25

Manufacturer


Genie

Indoor use only

8.12m



Working Envelope

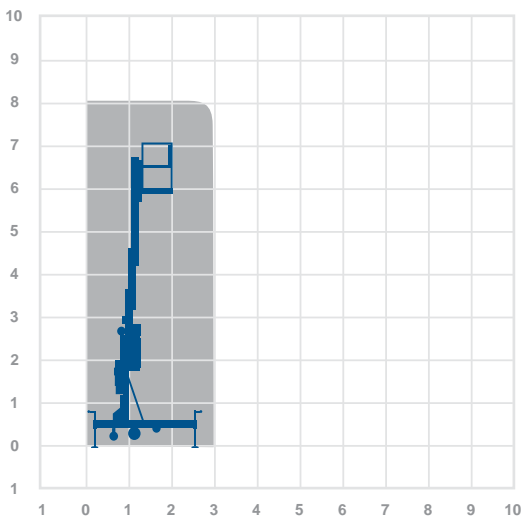

You can find the latest promotions, competitions and news from Nationwide Platforms by following us on our social media pages.

Working Height 9.54m

Closed Length	1.31m
Closed Height	1.98m
Closed Width	0.74m
Platform Size	1.14m x 0.66m
Max SWL	159kg
Weight	330kg

Alternative machines

GP20


Manufacturer

Genie

Indoor use only



Working Envelope

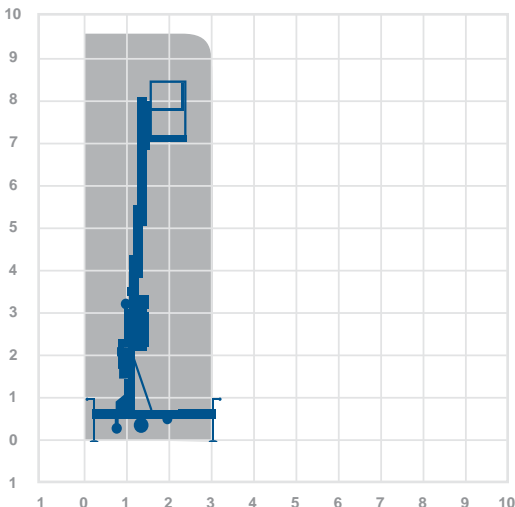



0345 745 0000

nationwideplatforms.co.uk

Scissor Lifts



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk

33

Scissor Lifts

- More than 7,200 units available to hire across the UK
- Working heights from 7m to 34m
- Lightweight and compact machines
- Direct drive electric machines for greater efficiency
- Double deck and rough terrain
- Variety of power options
- Narrow aisle machines for access to confined areas
- Non-marking tyre option for work on finished floors
- Models with 1,134kg SWL
- Lightweight models from 1,269kg
- Power to platform available

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**



Working Height 6.4m

Closed Length	1.83m
Closed Height	2.03m
Stowed Height (guardrails lowered)	1.73m
Closed Width	0.81m
Platform Size	1.63m x 0.74m
Platform Length (deck extended)	2.54m
Max SWL	272kg
Weight	1269kg

Alternative machines


3215
3219
GS1932

Manufacturer

Genie



Working Envelope

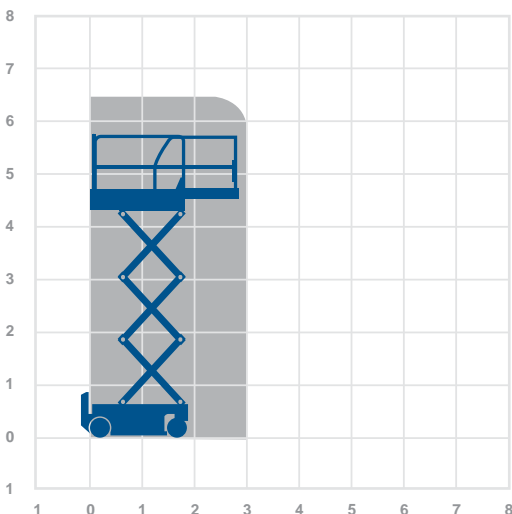

6.4m

Working Height 7.77m

Closed Length	1.9m
Closed Height	1.98m
Stowed Height (guardrails lowered)	1.98m
Closed Width	0.79m
Platform Size	0.74m x 1.72m
Platform Length (deck extended)	2.59m
Max SWL	230kg
Weight	1520g

Alternative machines

3220
GS1932
GS20


Manufacturer

Haulotte



7.77m

Working Envelope

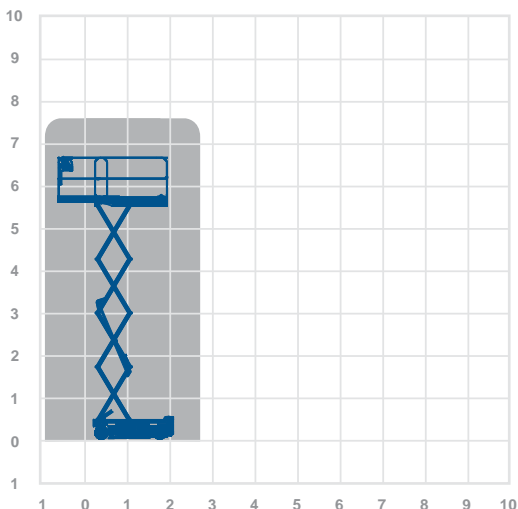

0345 745 0000

nationwideplatforms.co.uk

Working Height 7.8m

Closed Length	1.78m
Closed Height	2.11m
Stowed Height	1.64m
(guardrails lowered)	
Closed Width	0.81m
Platform Size	1.63m x 0.71m
Platform Length	2.53m
(deck extended)	
Max SWL	227kg
Weight	1312kg

Alternative machines


GS1932
GS20

Manufacturer

SkyJack



Working Envelope

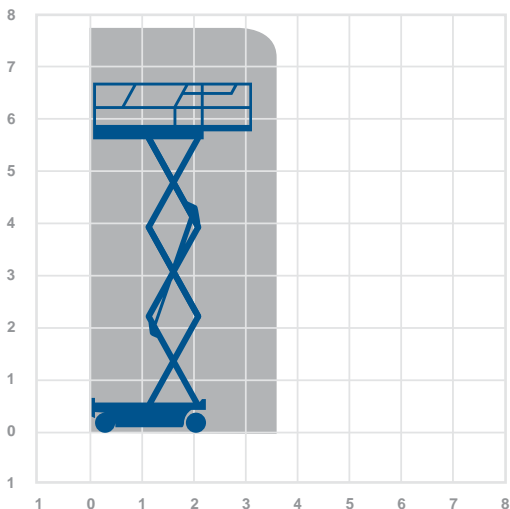

7.8m

Working Height 7.8m

Closed Length	1.82m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.76m
Closed Width	0.81m
Platform Size	1.64m x 0.74m
Platform Length (deck extended)	2.54m
Max SWL	227kg
Weight	1503kg

Alternative machines

3219
GS20
3220


Manufacturer

Genie



7.8m

Working Envelope

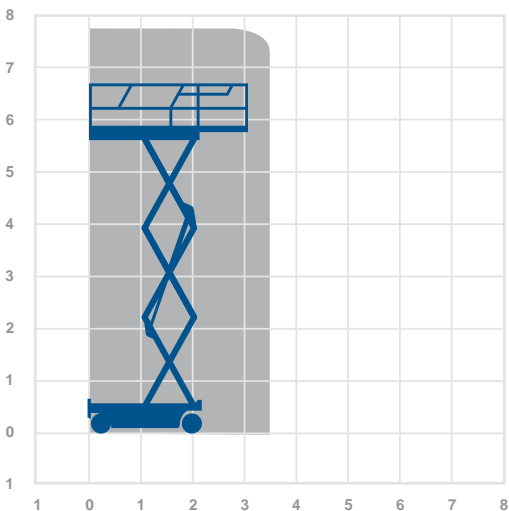

0345 745 0000

nationwideplatforms.co.uk

Working Height 7.92m

Closed Length	2.45m
Closed Height	2.1m
Stowed Height (guardrails lowered)	1.75m
Closed Width	0.81m
Platform Size	2.21m x 0.7m
Platform Length (deck extended)	3.2m
Max SWL	363kg
Weight	1559kg

Alternative machines


3220
2030ES

Manufacturer

Genie



Working Envelope

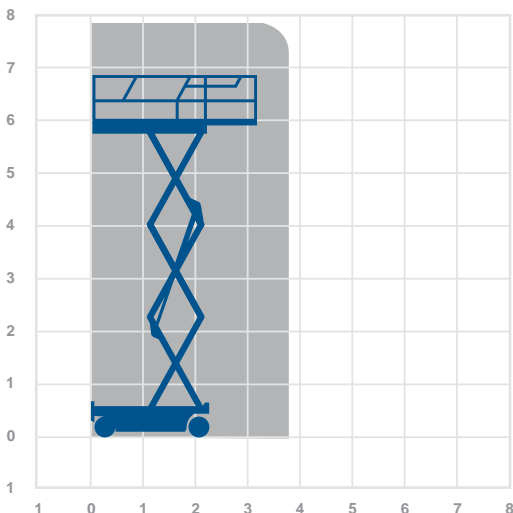

7.92m

3220

scissors

Working Height 8.1m

Closed Length	2.32m
Closed Height	2.08m
Stowed Height (guardrails lowered)	1.73m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.04m
Max SWL	408kg
Weight	1594kg

Alternative machines

GS20
2030ES


Manufacturer

SkyJack



8.1m

Working Envelope

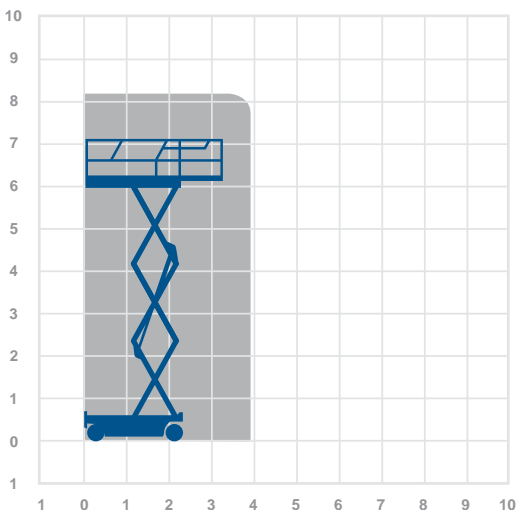

Learn more about our complete range of training courses by viewing or downloading our full training guide.

Working Height 8.2m

Closed Length	2.49m
Closed Height	2.0m
Stowed Height (guardrails lowered)	1.13m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	350kg
Weight	1655kg

Alternative machines


GS26
GS2632
3226

Manufacturer

Haulotte



Working Envelope

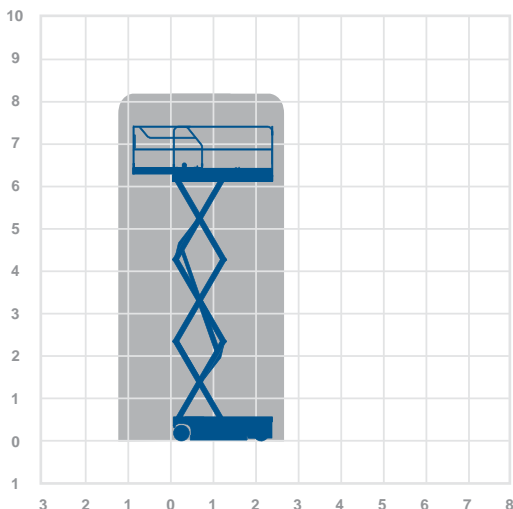

8.2m

Working Height 9.75m

Closed Length	2.45m
Closed Height	2.17m
Stowed Height (guardrails lowered)	1.99m
Closed Width	1.17m
Platform Size	2.21m x 0.94m
Platform Length (deck extended)	3.2m
Max SWL	454kg
Weight	2107kg

Alternative machines

4626


Manufacturer

Genie



9.75m

Working Envelope

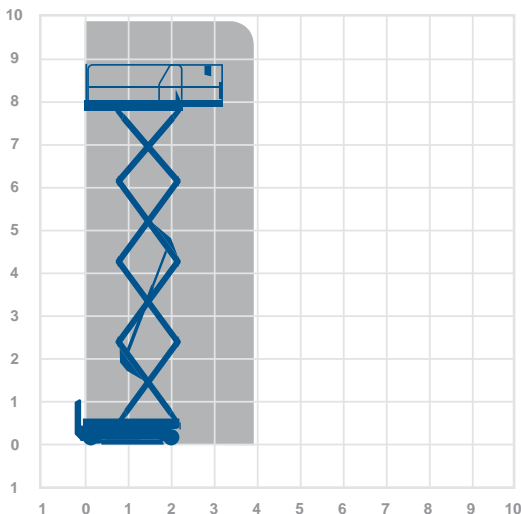

0345 745 0000

nationwideplatforms.co.uk

Working Height 9.9m

Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	4.5m
Max SWL	680kg
Weight	3768kg

Alternative machines


GS26D-O
6826D

Manufacturer

Genie



Working Envelope

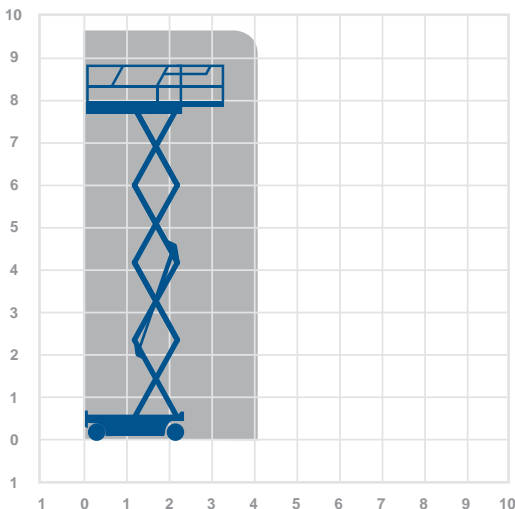

9.9m

 **Nationwide Platforms**

A **LOXAM** Company

Working Height 9.9m

Closed Length	2.31m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.79m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	454kg
Weight	2130kg

Alternative machines


GS26

Manufacturer

SkyJack



9.9m

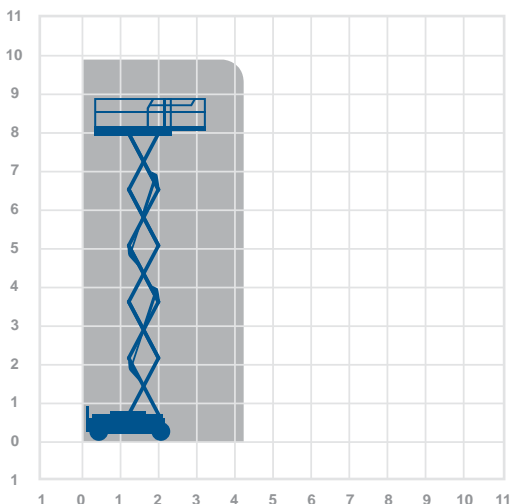Working Envelope**0345 745 0000****nationwideplatforms.co.uk**

6826D

scissors

Working Height 9.92m

Closed Length	3.12m
Closed Height	2.37m
Stowed Height (guardrails lowered)	1.61m
Closed Width	1.72m
Platform Size	2.44m x 1.42m
Platform Length (deck extended)	3.94m
Max SWL	567kg
Weight	3305kg

Alternative machines


GS26D
GS26D-O

Manufacturer

SkyJack



Working Envelope

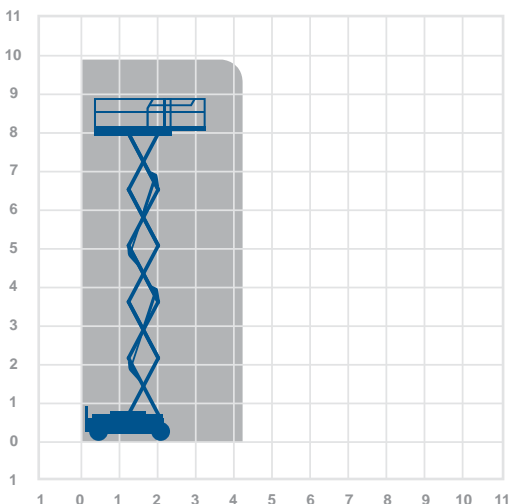

9.92m

Scan the QR code or visit our website to learn more about the Work at Height Regulations (2005) and the legislation designed to keep you and your employees safe.



Working Height 9.92m

Closed Length	2.67m
Closed Height	2.35m
Stowed Height (guardrails lowered)	1.7m
Closed Width	1.73m
Platform Size	2.51m x 1.55m
Platform Length (deck extended)	3.96m
Max SWL	567kg
Weight	3455kg

Alternative machines

GS26D
6826D


Manufacturer

Genie



9.92m

Working Envelope

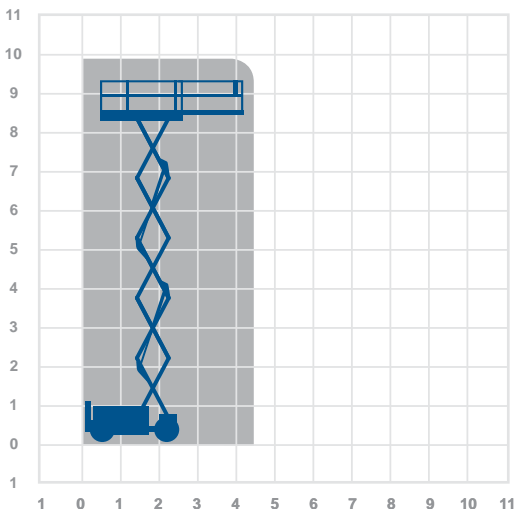

0345 745 0000

nationwideplatforms.co.uk

Working Height 9.92m

Closed Length	2.32m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.23m
Max SWL	227kg
Weight	1890kg

Alternative machines

GS2632


Manufacturer

SkyJack

Indoor use only



Working Envelope

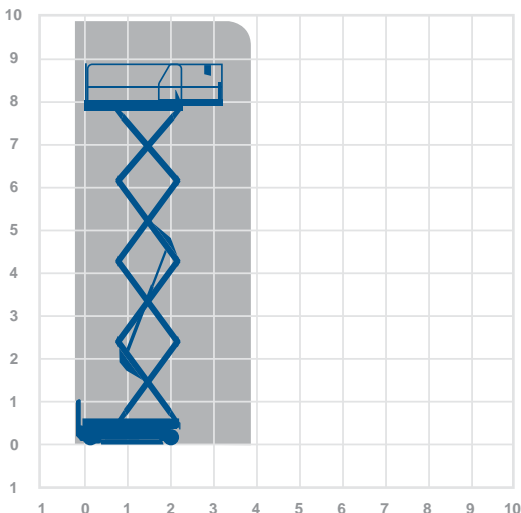

9.92m

A **LOXAM** Company

Working Height 9.92m

Closed Length	2.44m
Closed Height	2.26m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.26m x 0.79m
Platform Length (deck extended)	3.18m
Max SWL	227kg
Weight	1956kg

Alternative machines

3226
2630


Manufacturer

Genie

Indoor use only



Working Envelope

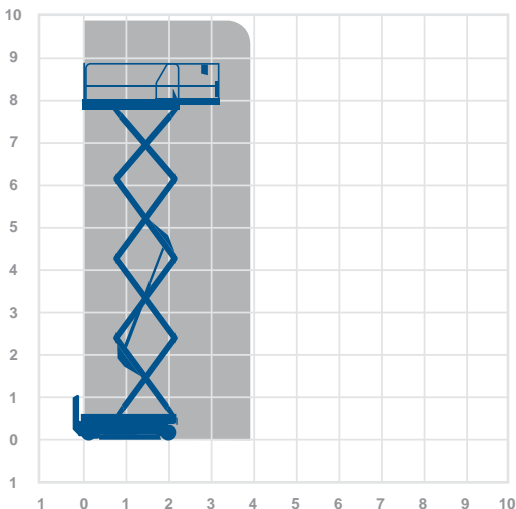

0345 745 0000

nationwideplatforms.co.uk


Working Height 10.0m

Closed Length	2.49m
Closed Height	2.18m
Stowed Height (guardrails lowered)	1.32m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	230kg
Weight	2190kg

Alternative machinesGS2632
3226**Manufacturer**

Haulotte

Indoor use only

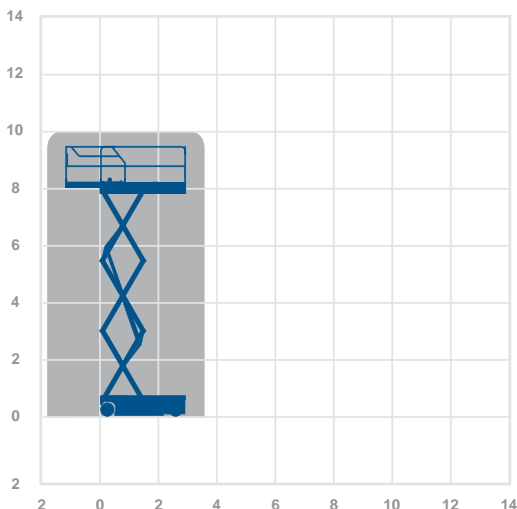**Working Envelope**

10.0m

Working Height 10.15m

Closed Length	2.31m
Closed Height	2.14m
Stowed Height (guardrails lowered)	1.28m
Closed Width	1.2m
Platform Size	2.31m x 1.2m
Platform Length (deck extended)	3.23m
Max SWL	450kg
Weight	2330kg

Alternative machines

GS2632
3226
COM10N


Manufacturer

Haulotte



10.15m

Working Envelope

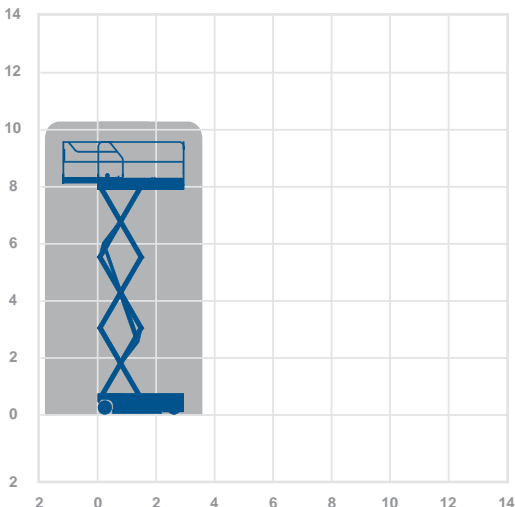

0345 745 0000

nationwideplatforms.co.uk

Working Height 10.3m


Closed Length	3.17m
Closed Height	2.44m
Stowed Height (guardrails lowered)	1.59m
Closed Width	1.78m
Platform Size	2.45m x 1.45m
Platform Length (deck extended)	3.7m
Max SWL	565kg
Weight	3520kg

Alternative machines

GS26D
6826D

Manufacturer

Haulotte

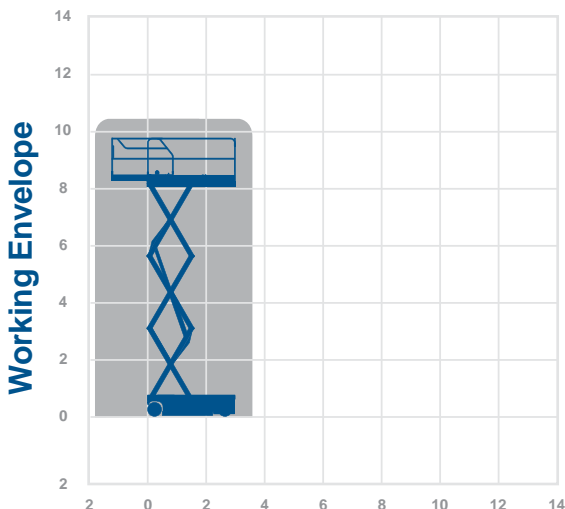

10.3m

6832D

scissors

Working Height 11.75m

Closed Length	3.12m
Closed Height	2.51m
Stowed Height (guardrails lowered)	1.75m
Closed Width	1.72m
Platform Size	2.44m x 1.42m
Platform Length (deck extended)	3.94m
Max SWL	454kg
Weight	3655kg

Alternative machines

GS32D
GS32D-O


Manufacturer

SkyJack



11.75m

Working Envelope

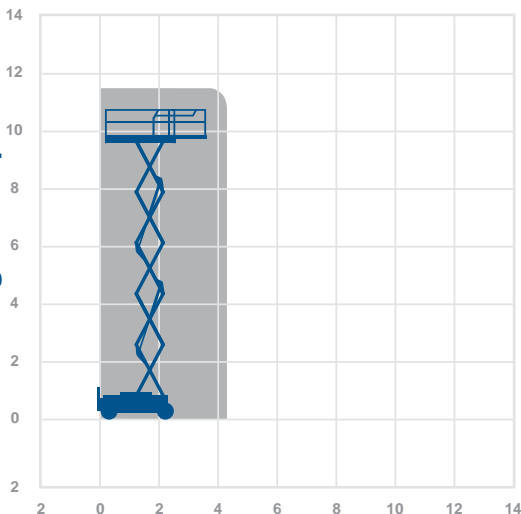

0345 745 0000

nationwideplatforms.co.uk

Working Height 11.75m

Closed Length	2.31m
Closed Height	2.24m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	317kg
Weight	2300kg


Alternative machines

GS32

3246

Manufacturer

SkyJack

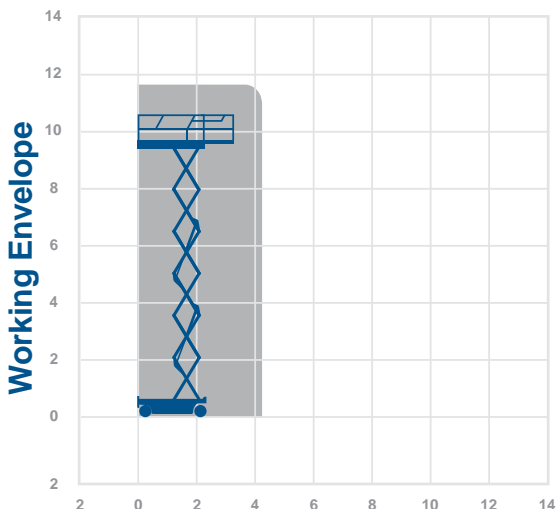

11.75m

Working Height 11.75m

Closed Length	2.43m
Closed Height	2.3m
Stowed Height (guardrails lowered)	1.8m
Closed Width	1.17m
Platform Size	2.26m x 1.16m
Platform Length (deck extended)	3.25m
Max SWL	318kg
Weight	2796kg

Alternative machines

4632


3246

Manufacturer

Genie



11.75m

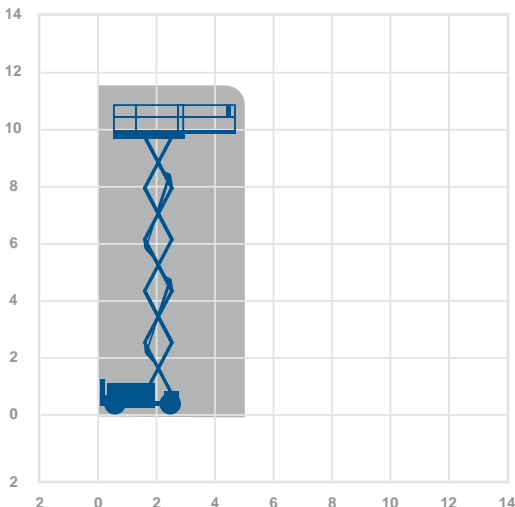Working Envelope**0345 745 0000****nationwideplatforms.co.uk**

Working Height 11.75m

Closed Length	2.44m
Closed Height	2.44m
Stowed Height (guardrails lowered)	2.03m
Closed Width	0.81m
Platform Size	2.26m x 0.81m
Platform Length (deck extended)	3.33m
Max SWL	227kg
Weight	2352kg


Alternative
machines

GS32

Manufacturer

Genie

Indoor use only

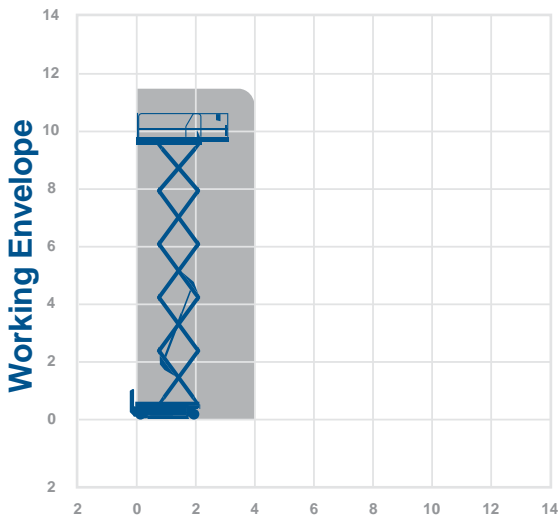

11.75m

Working Height 11.75m

Closed Length	3.35m
Closed Height	2.51m
Stowed Height (guardrails lowered)	1.75m
Closed Width	1.76m
Platform Size	1.42m x 2.44m
Platform Length (deck extended)	3.96m
Max SWL	454kg
Weight	3844kg

Alternative machines


4069ERT

Manufacturer

SkyJack



11.75m

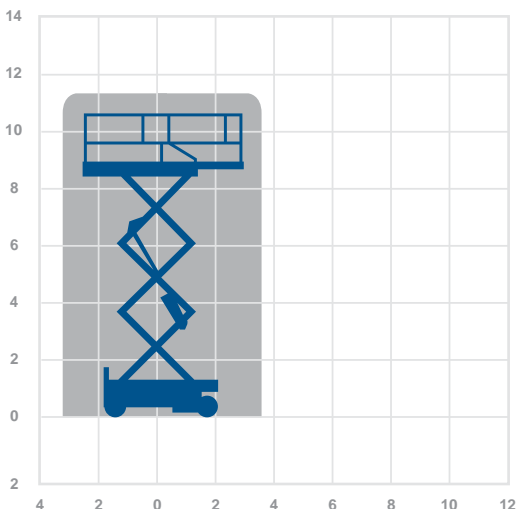Working Envelope**0345 745 0000****nationwideplatforms.co.uk**

Working Height 11.8m


Closed Length	2.67m
Closed Height	2.45m
Stowed Height (guardrails lowered)	1.83m
Closed Width	1.73m
Platform Size	2.51m x 1.55m
Platform Length (deck extended)	3.96m
Max SWL	454kg
Weight	4115kg

Alternative
machines

6832D

Manufacturer

Genie

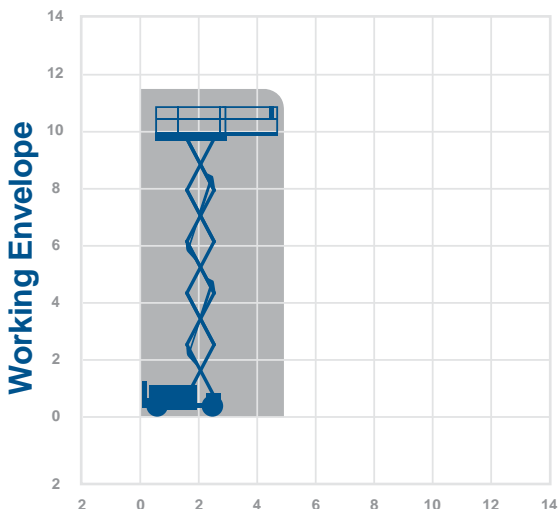

11.8m

Working Height 11.96m

Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	4.5m
Max SWL	454kg
Weight	3949kg

Alternative machines

6832D


Manufacturer

Genie



11.96m

Working Envelope

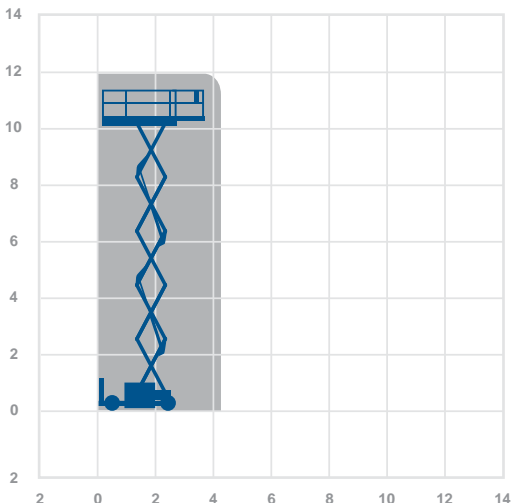

0345 745 0000


nationwideplatforms.co.uk

Working Height 12.0m

Closed Length	2.49m
Closed Height	2.39m
Stowed Height (guardrails lowered)	1.53m
Closed Width	1.2m
Platform Size	1.2m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	300kg
Weight	2470g

Alternative machinesGS32
4632**Manufacturer**

Haulotte

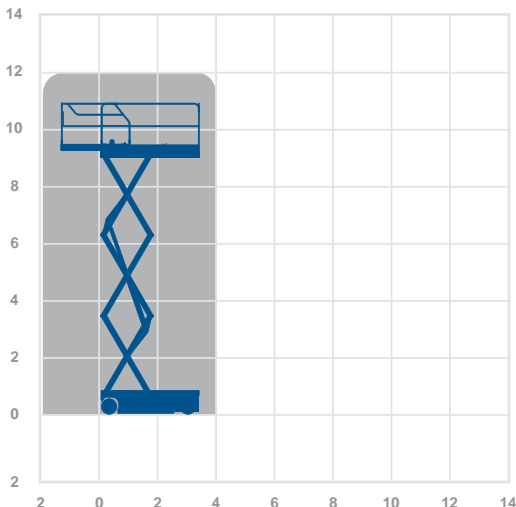**Working Envelope**

12.0m

GS33

scissors

Working Height 12.06m

Closed Length	4.88m
Closed Height	2.68m
Stowed Height (guardrails lowered)	2.0m
Closed Width	2.13m
Platform Size	3.89m x 1.83m
Platform Length (deck extended)	6.57m
Max SWL	1134kg
Weight	7520kg

Alternative machines

GS3390RT
GS43
6832D
GS3369RT


Manufacturer

Genie



12.06m

Working Envelope

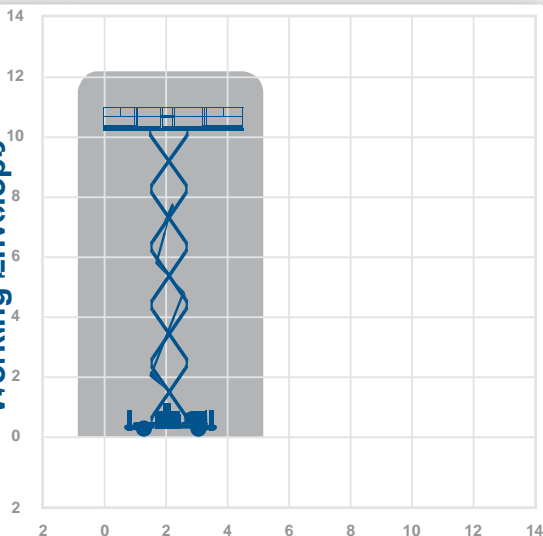

One day of powered access training, years of working safely at height. Call today and get trained with Nationwide Platforms. Call: 0345 745 0000

Working Height 12.06m

Closed Length	4.88m
Closed Height	2.71m
Stowed Height (guardrails lowered)	2.03m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	1134kg
Weight	6890kg

Alternative machines


GS33
GS43
6832D
GS3369RT

Manufacturer

Genie



Working Envelope

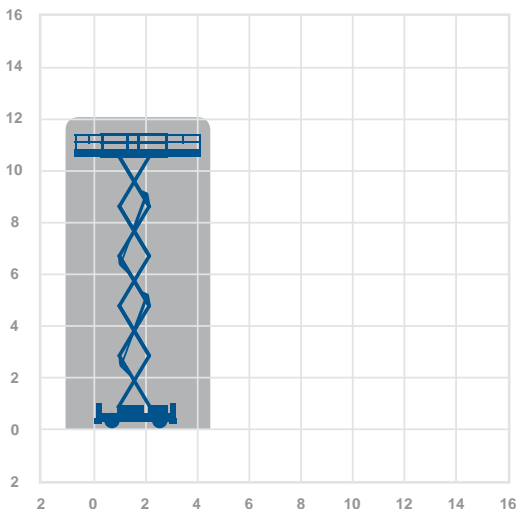

12.06m

Working Height 12.06m

Closed Length	4.88m
Closed Height	2.71m
Stowed Height (guardrails lowered)	2.03m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	1134kg
Weight	6826kg

Alternative machines


GS43G
GS53G

Manufacturer

Genie



Working Envelope

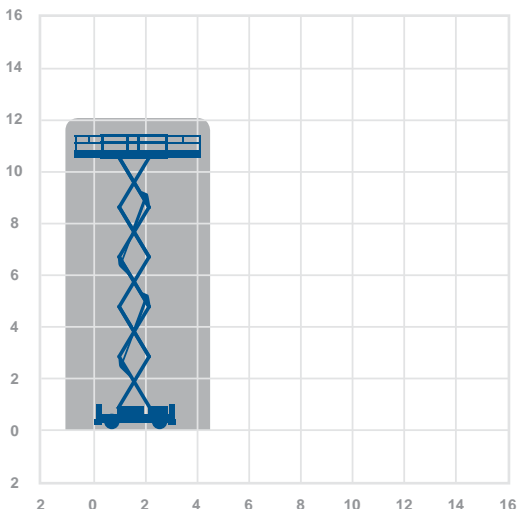

0345 745 0000

nationwideplatforms.co.uk



 **Nationwide Platforms**
A **LOXAM** Company

Working Height 12.06m

Closed Length	3.17m
Closed Height	2.56m
Stowed Height (guardrails lowered)	1.7m
Closed Width	1.78m
Platform Size	1.78m x 3.7m
Platform Length (deck extended)	3.7m
Max SWL	450kg
Weight	4110kg

Alternative machines

GS3369RT
GS32D-O


Manufacturer

Haulotte



12.06m

Working Envelope

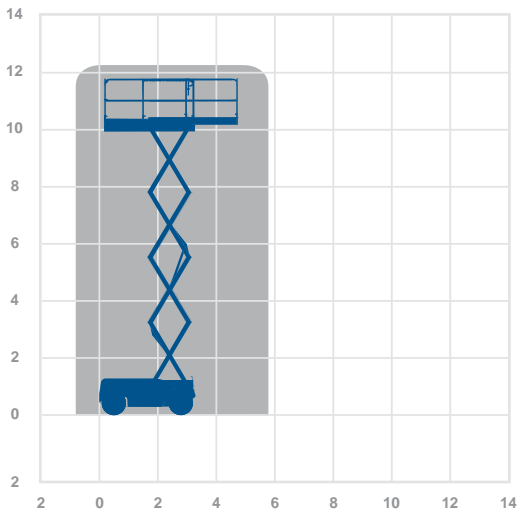

0345 745 0000

nationwideplatforms.co.uk

Working Height 13.7m

Closed Length	2.44m
Closed Height	2.54m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.19m
Platform Size	2.26m x 1.15m
Platform Length (deck extended)	3.36m
Max SWL	350kg
Weight	3221kg


Alternative machines

COM14
S142-12
S152-12

Manufacturer

Genie

Indoor use only

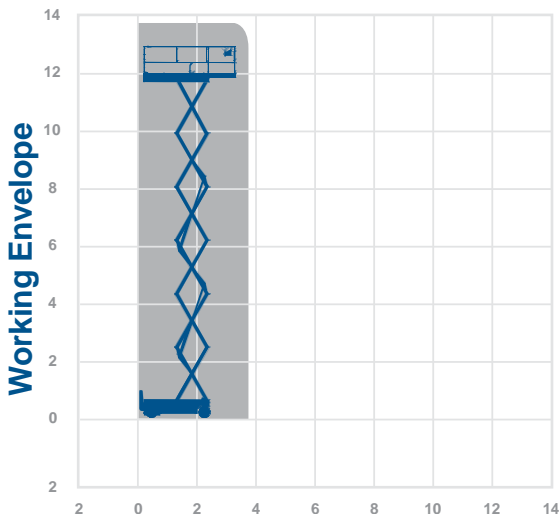

13.7m

Working Height 13.8m

Closed Length	2.74m
Closed Height	2.5m
Stowed Height (guardrails lowered)	2.08m
Closed Width	1.2m
Platform Size	2.3m x 1.2m
Platform Length (deck extended)	3.22m
Max SWL	350kg
Weight	3175kg

Alternative machines

LL15N
S142-12
S152-12

Manufacturer


Haulotte

Indoor use only



13.8m

Working Envelope

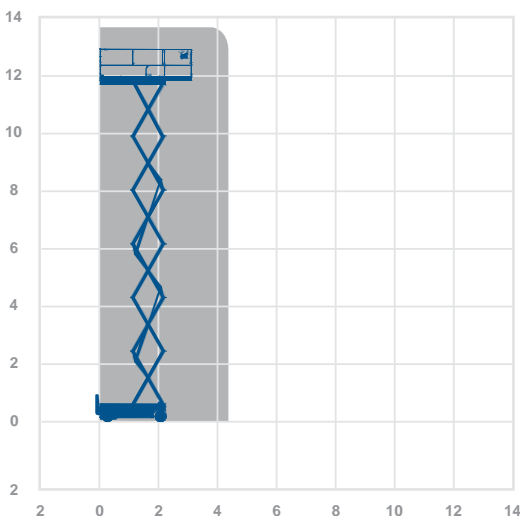

0345 745 0000

nationwideplatforms.co.uk

Working Height 14.12m


Closed Length	2.79m
Closed Height	2.74m
Stowed Height (guardrails lowered)	2.08m
Closed Width	1.75m
Platform Size	1.60m x 2.79m
Platform Length (deck extended)	4.31m
Max SWL	363kg
Weight	5200g

Alternative machines

M4069
GS4069E
4069ERT

Manufacturer

Genie

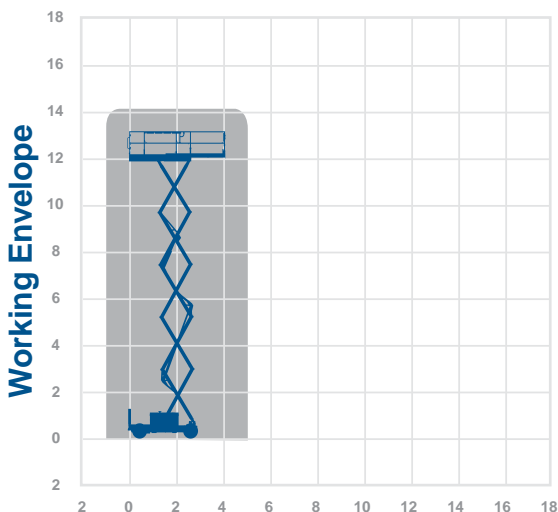

14.12m

Working Height 14.19m

Closed Length	3.1m
Closed Height	2.83m
Stowed Height (guardrails lowered)	2.01m
Closed Width	1.75m
Platform Size	2.92m x 1.65m
Platform Length (deck extended)	3.83m
Max SWL	360kg
Weight	5700kg

Alternative machines

4069
4069-O


Manufacturer

JLG



14.19m

Working Envelope

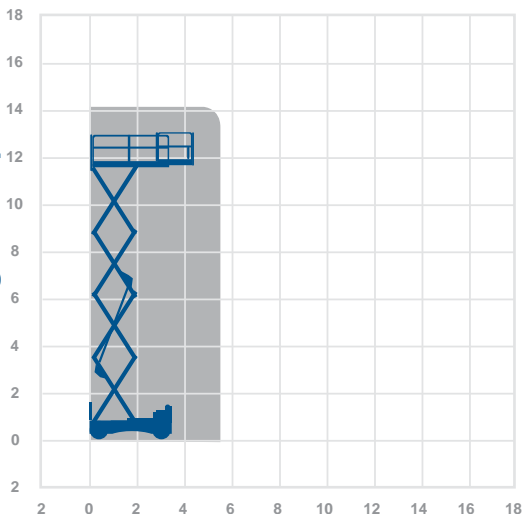

0345 745 0000

nationwideplatforms.co.uk

Working Height 14.2m

Closed Length	2.71m
Closed Height	2.76m
Stowed Height (guardrails lowered)	1.98m
Closed Width	1.2m
Platform Size	2.5m x 1.2m
Platform Length (deck extended)	3.7m
Max SWL	350kg
Weight	3400kg

Alternative machines

S152-12
COM14
GS4047


Manufacturer

HAB

Indoor use only



Working Envelope

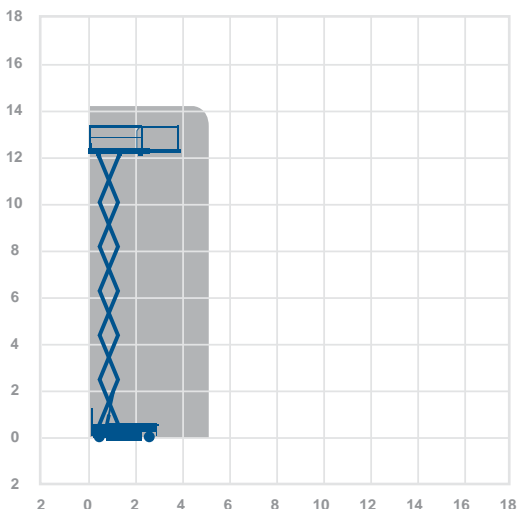

14.2m

Working Height 14.5m


Closed Length	4.5m
Closed Height	2.8m
Stowed Height (guardrails lowered)	2.0m
Closed Width	2.3m
Platform Size	4.30m x 1.90m
Platform Length (deck extended)	7.2m
Max SWL	681kg
Weight	6715kg

Alternative machines

8841
GS43

Manufacturer

SkyJack

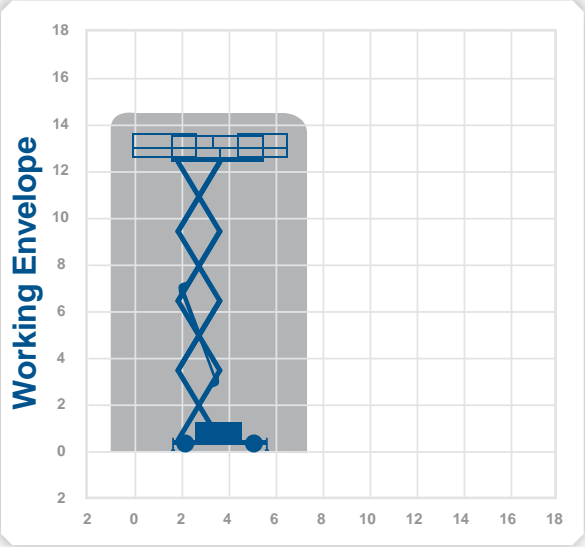

0345 745 0000

nationwideplatforms.co.uk

8841


scissors

Working Height 14.5m

Closed Length	3.49m
Closed Height	2.9m
Stowed Height (guardrails lowered)	2.22m
Closed Width	2.21m
Platform Size	3.51m x 1.76m
Platform Length (deck extended)	4.71m
Max SWL	680kg
Weight	5289kg

Alternative machines9241
GS43**Manufacturer**

SkyJack

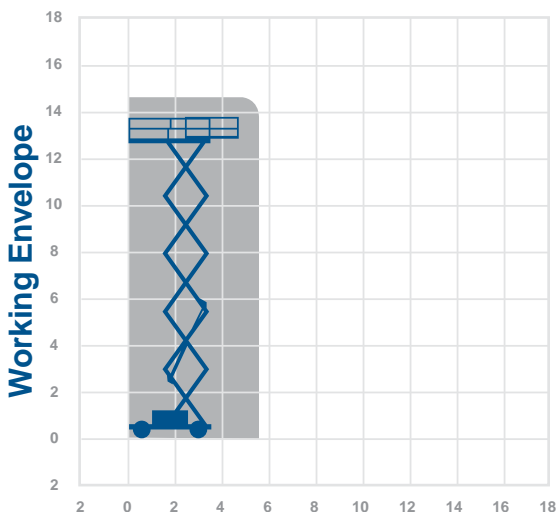

14.5m

Working Height 15.0m

Closed Length	5.3m
Closed Height	2.77m
Stowed Height (guardrails lowered)	1.91m
Closed Width	2.25m
Platform Size	1.89m x 5.3m
Platform Length (deck extended)	7.3m
Max SWL	500kg
Weight	6470kg

Alternative machines

GS43


Manufacturer

Haulotte



15.0m

Working Envelope

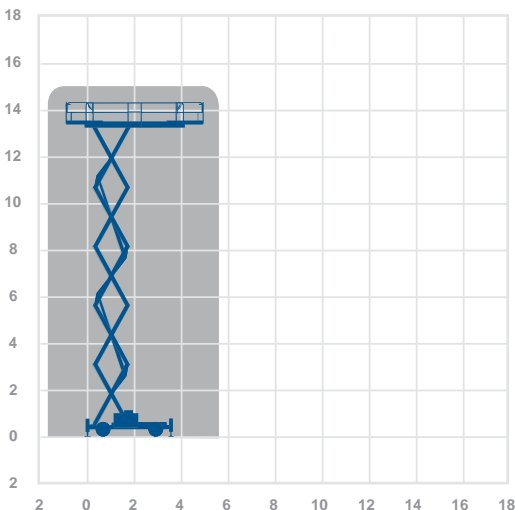

0345 745 0000

nationwideplatforms.co.uk

Working Height 15.1m


Closed Length	4.88m
Closed Height	2.93m
Stowed Height (guardrails lowered)	2.25m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	7323kg

Alternative machines

8841
9241
GS53

Manufacturer

Genie

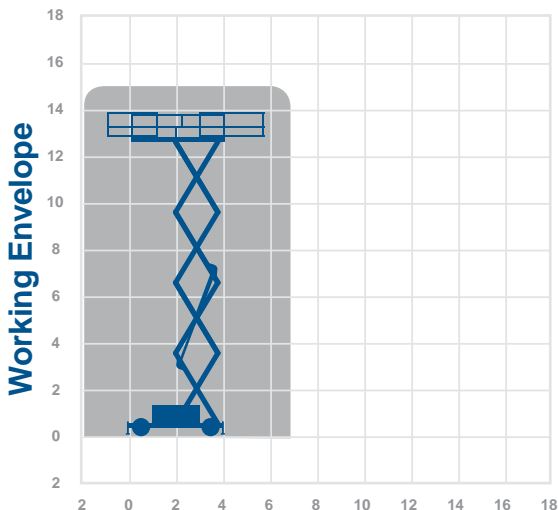

15.1m

Working Height 15.1m

Closed Length	4.88m
Closed Height	2.93m
Stowed Height (guardrails lowered)	2.25m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	7323kg

Alternative machines

GS53G


Manufacturer

Genie



15.1m

Working Envelope

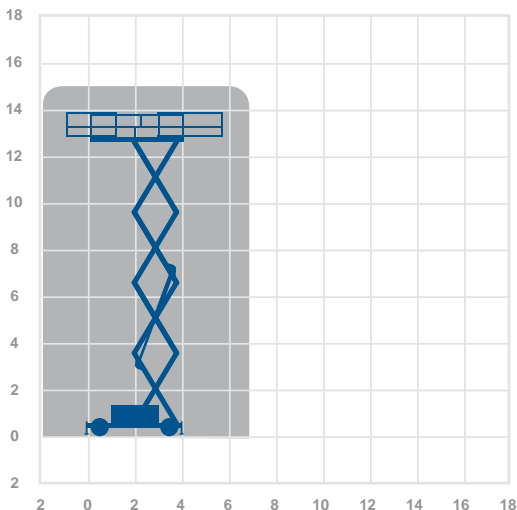

0345 745 0000

nationwideplatforms.co.uk



 **Nationwide Platforms**
A **LOXAM** Company

S152-12

scissors

Working Height 15.2m

Closed Length	3.35m
Closed Height	3.0m
Stowed Height (guardrails lowered)	2.25m
Closed Width	1.19m
Platform Size	3.04m x 1.18m
Platform Length (deck extended)	4.24m
Max SWL	500kg
Weight	4700kg


Alternative machines

LL15N
GS4047
COM14
S142-12

Manufacturer

HAB


Indoor use only

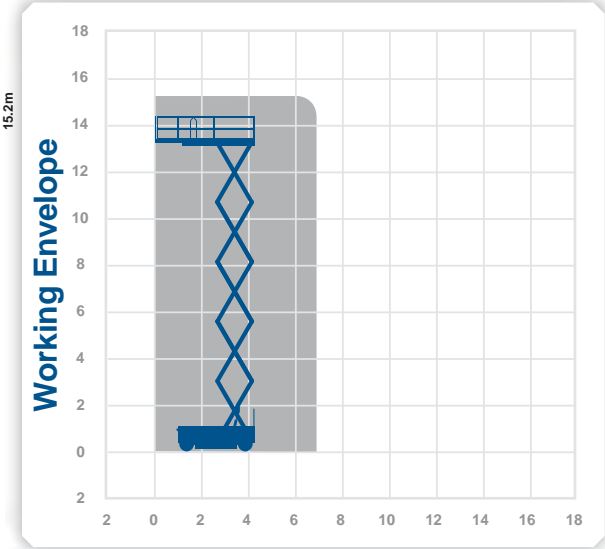

Sign up for our seasonal newsletters and we'll keep you up to date with an exclusive digest of our headline news, upcoming events and more!

Closed Length	4.47m
Closed Height	3.16m
Stowed Height (guardrails lowered)	2.29m
Closed Width	2.34m
Platform Size	4.27m x 1.88m
Platform Length (deck extended)	7.2m
Max SWL	681kg
Weight	7395kg

SkyJack

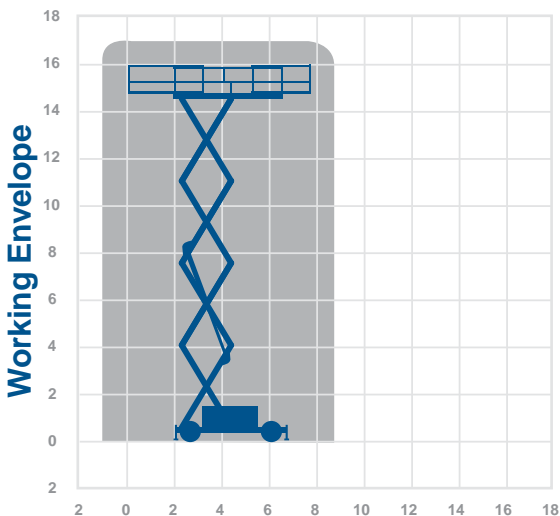

Working Height 17.3m

Closed Length	4.12m
Closed Height	3.3m
Stowed Height (guardrails lowered)	2.55m
Closed Width	1.22m
Platform Size	3.9m x 1.2m
Platform Length (deck extended)	5.4m
Max SWL	500kg
Weight	7600kg

Alternative machines

S152-12
S175-12
165-12
LL17E

Manufacturer


Liftflux

Indoor use only



17.3m

Working Envelope

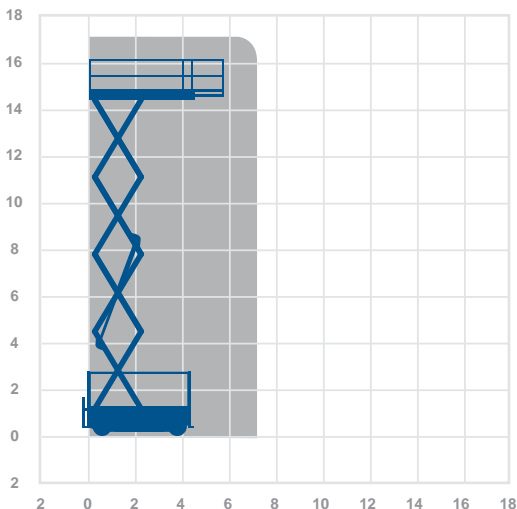

0345 745 0000

nationwideplatforms.co.uk

Working Height 17.5m

Closed Length	3.34m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.38m
Closed Width	1.19m
Platform Size	3.04m x 1.18m
Platform Length (deck extended)	4.25m
Max SWL	500kg
Weight	5350kg


Alternative machines

LL15N
S175-12
165-12

Manufacturer

HAB

Indoor use only

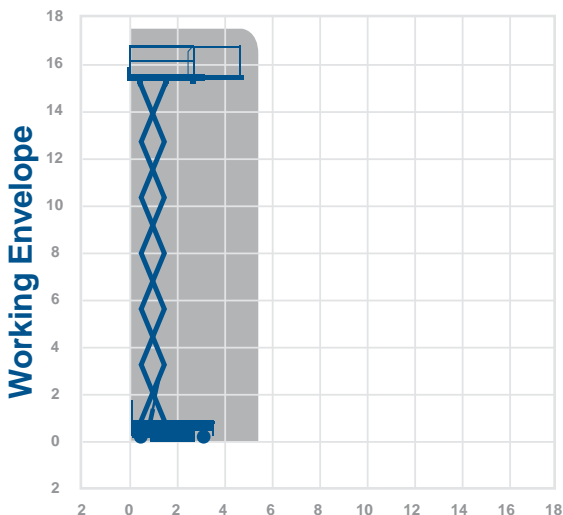

17.5m

Working Height 18.0m

Closed Length	5.3m
Closed Height	2.99m
Stowed Height (guardrails lowered)	2.11m
Closed Width	2.25m
Platform Size	1.89m x 5.3m
Platform Length (deck extended)	7.3m
Max SWL	500kg
Weight	7360g

Alternative machines

GS53


Manufacturer

Haulotte



18.0m

Working Envelope

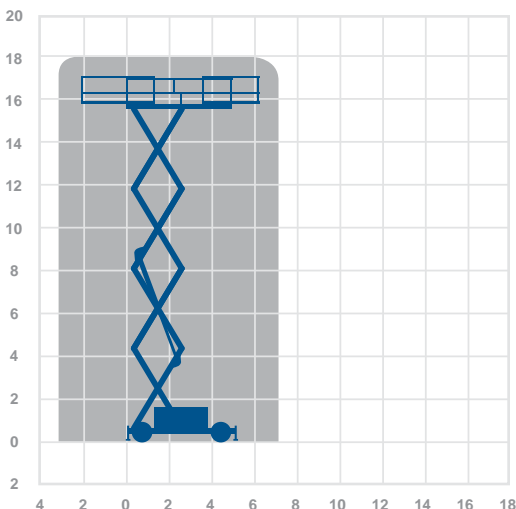

0345 745 0000

nationwideplatforms.co.uk

Working Height 18.15m


Closed Length	4.88m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.47m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	8050kg

Alternative machines

LL20X
9250X
9250

Manufacturer

Genie

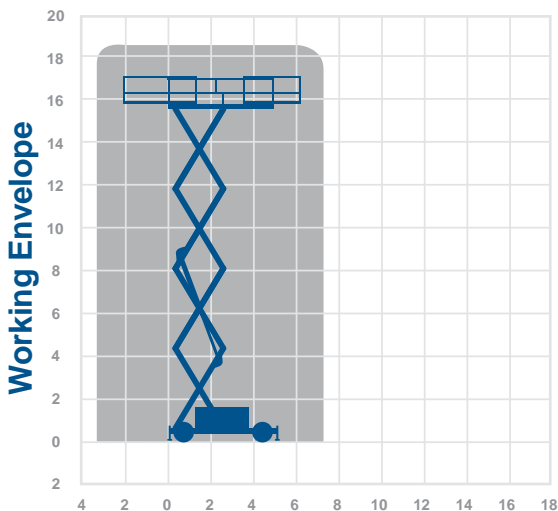

18.15m

Working Height 18.2m

Closed Length	3.98m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.47m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	9541kg

Alternative machines

GS43G


Manufacturer

Genie



18.2m

Working Envelope

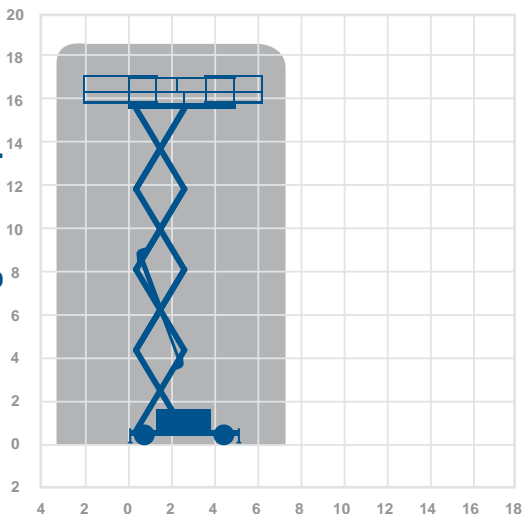

0345 745 0000

nationwideplatforms.co.uk

Working Height 18.5m

Closed Length	3.74m
Closed Height	3.4m
Stowed Height (guardrails lowered)	2.65m
Closed Width	1.2m
Platform Size	3.38m x 1.16m
Platform Length (deck extended)	4.88m
Max SWL	500kg
Weight	7985kg

Alternative machines

LL15N
S175-12
180-12
LL15N


Manufacturer

Holland Lift

Indoor use only



Working Envelope

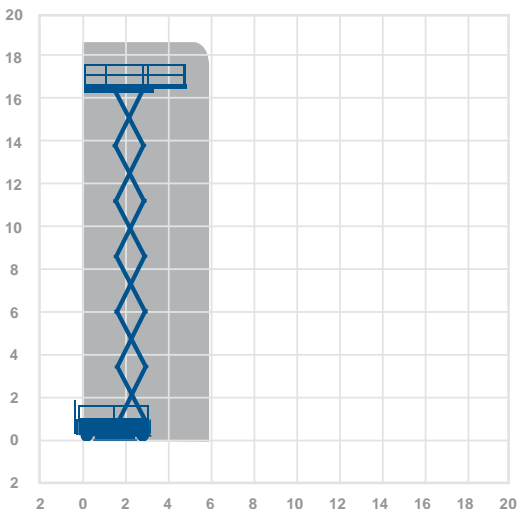

18.5m

Learn more about our complete range of training courses by viewing or downloading our full training guide.





0345 745 0000

nationwideplatforms.co.uk

Working Height 21.4m

Closed Length	3.74m
Closed Height	3.74m
Stowed Height (guardrails lowered)	3.01m
Closed Width	1.20m
Platform Size	3.38m x 1.16m
Platform Length (deck extended)	4.88m
Max SWL	500kg
Weight	9120kg


Alternative machines

SL180N

Manufacturer

Holland Lift

Indoor use only

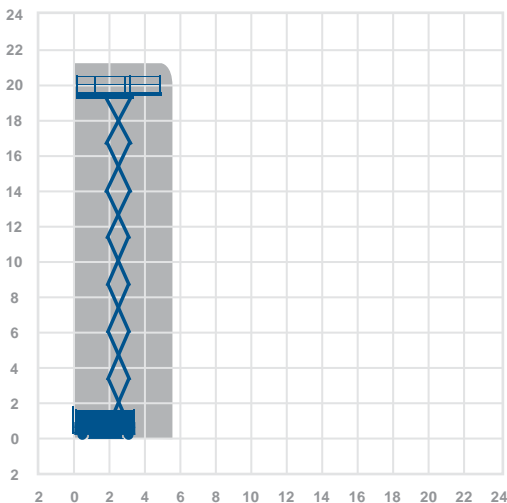**Working Envelope**

21.4m

Working Height 21.7m

Closed Length	4.84m
Closed Height	3.65m
Stowed Height (guardrails lowered)	2.88m
Closed Width	2.44m
Platform Size	2.30m x 4.50m
Platform Length (deck extended)	7.0m
Max SWL	750kg
Weight	13900g

Alternative machines

HL220D
HL235D
S225
LL20X
SL210
SL245


Manufacturer

Hollandlift

21.7m



Working Envelope

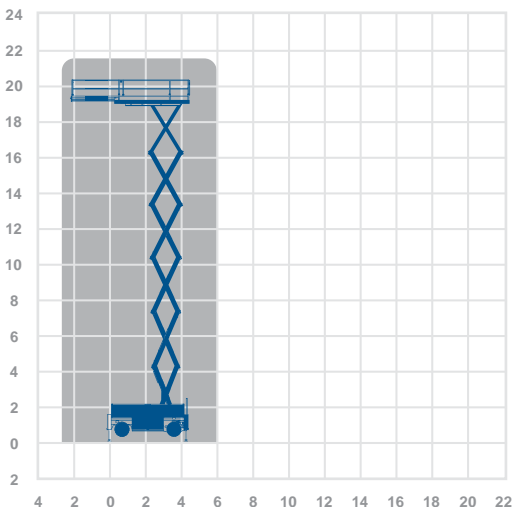

0345 745 0000

nationwideplatforms.co.uk

Working Height 21.9m

Closed Length	4.84m
Closed Height	3.65m
Stowed Height (guardrails lowered)	2.88m
Closed Width	2.44m
Platform Size	4.50m X 2.30m
Platform Length (deck extended)	7.0m
Max SWL	750kg
Weight	12140kg

Alternative machines


LL20X
LL26X
HL235D
SL210

Manufacturer

Holland Lift



Working Envelope

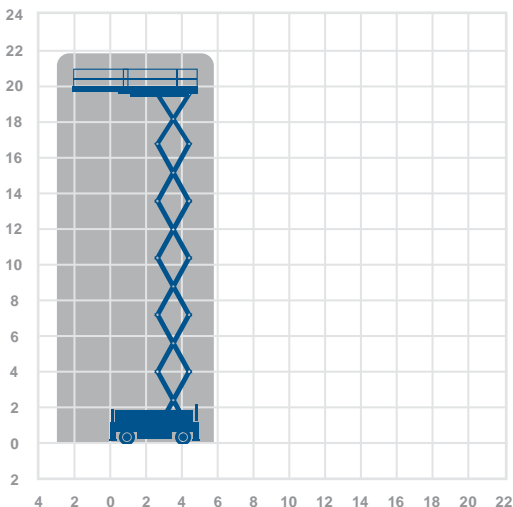

21.9m

Working Height 22.5m

Closed Length	4.84m
Closed Height	3.72m
Stowed Height (guardrails lowered)	2.88m
Closed Width	2.39m
Platform Size	4.5m x 2.36m
Platform Length (deck extended)	7.2m
Max SWL	750kg
Weight	11000kg


Alternative machines

LL20X
LL26X
HL220D
HL235D

Manufacturer

HAB

22.5m

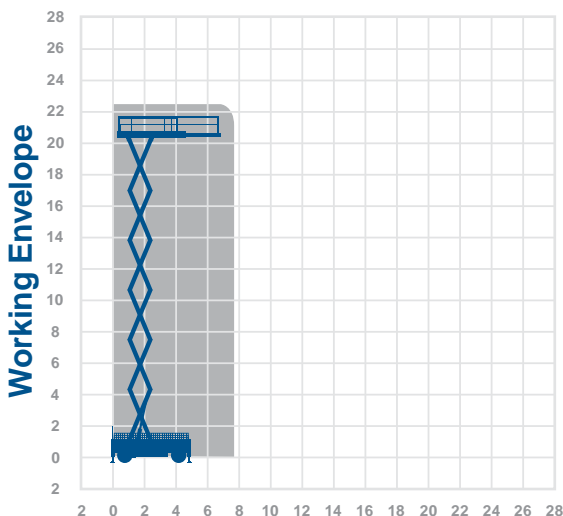

0345 745 0000

nationwideplatforms.co.uk

Working Height 23.0m


Closed Length	5.75m
Closed Height	4.1m
Stowed Height (guardrails lowered)	3.2m
Closed Width	2.5m
Platform Size	5.35m x 2.50m
Platform Length (deck extended)	7.55m
Max SWL	1000kg
Weight	15000kg

Alternative machines

LL20X
HL220D
HL235D
S225-24

Manufacturer

Liftlux

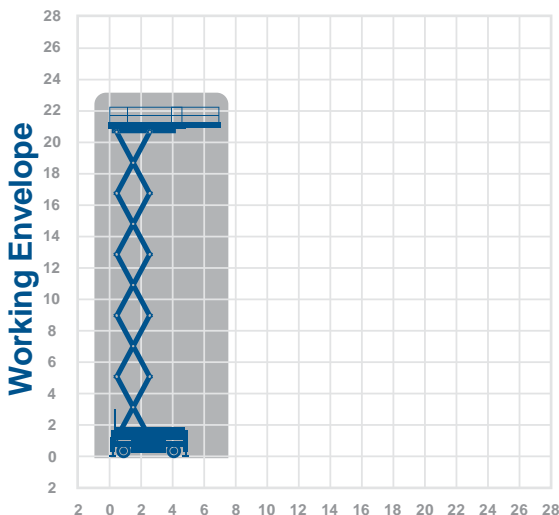

Working Height 23.2m

Closed Length	5.75m
Closed Height	4.01m
Stowed Height (guardrails lowered)	3.1m
Closed Width	2.49m
Platform Size	5.22m x 2.40m
Platform Length (deck extended)	7.32m
Max SWL	1000kg
Weight	18100kg


Alternative machines

LL20X
S225-24
SL210
HL220D

Manufacturer

Holland Lift

23.2m

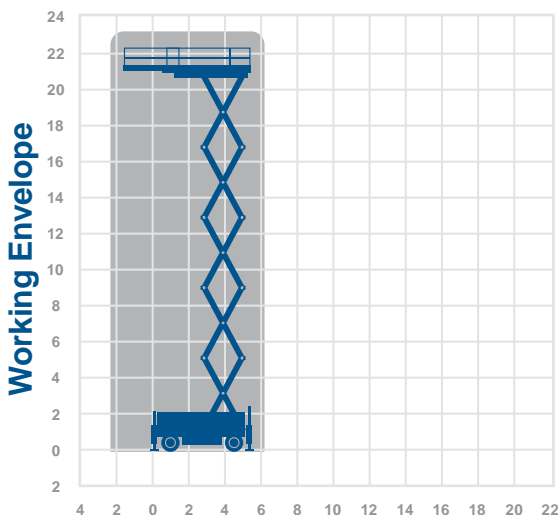

0345 745 0000

nationwideplatforms.co.uk

M250

scissors

Working Height 27.0m


Closed Length	6.57m
Closed Height	3.89m
Stowed Height (guardrails lowered)	3.13m
Closed Width	2.65m
Platform Size	6.15m x 2.5m
Platform Length (deck extended)	8.25m
Max SWL	1000kg
Weight	21910kg

Alternative
machines

LL26X

Manufacturer

Holland Lift

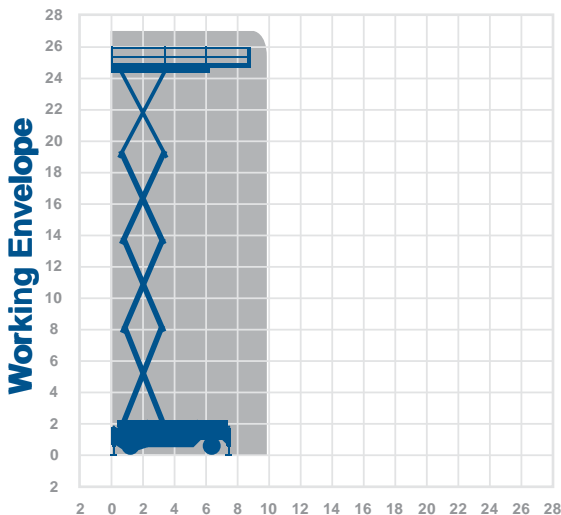

Scan the QR code or visit our website
to learn more about the Work at Height
Regulations (2005) and the legislation
designed to keep you and your
employees safe.



27.0m

Working Height 27.2m


Closed Length	6.57m
Closed Height	3.89m
Stowed Height (guardrails lowered)	3.13m
Closed Width	2.5m
Platform Size	2.35m x 6.15m
Platform Length (deck extended)	8.25m
Max SWL	1000kg
Weight	25100kg

Alternative machines

M250
LL26X
S280

Manufacturer

Hollandlift

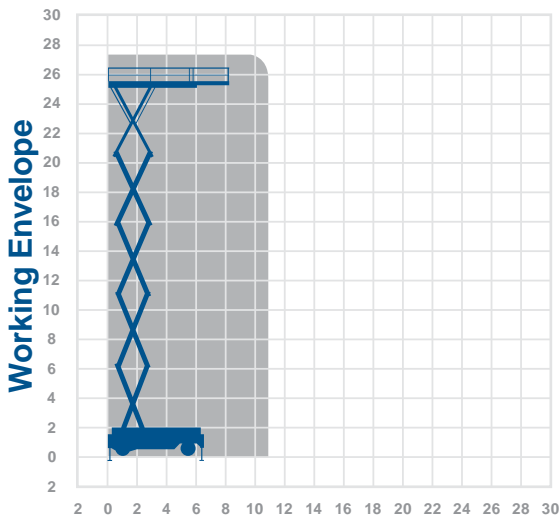

0345 745 0000

nationwideplatforms.co.uk

Working Height 28.0m

Closed Length	5.96m
Closed Height	4.1m
Stowed Height (guardrails lowered)	3.4m
Closed Width	2.5m
Platform Size	5.48m x 2.44m
Platform Length (deck extended)	7.57m
Max SWL	750kg
Weight	18000kg


Alternative machines

LL26X

Manufacturer

HAB

28.0m

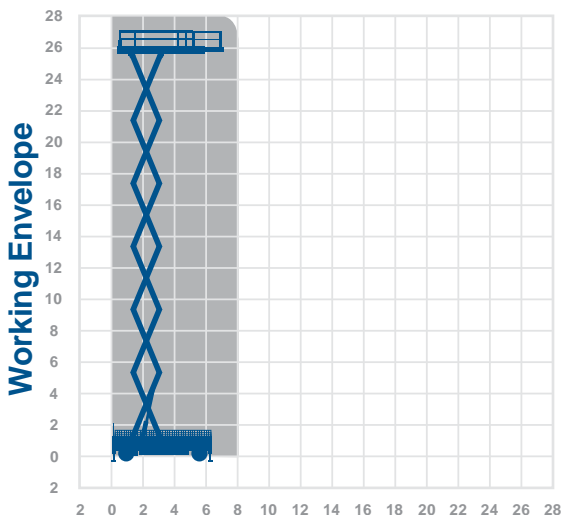

Working Height 28.3m


Closed Length	7.15m
Closed Height	4.2m
Stowed Height (guardrails lowered)	3.1m
Closed Width	2.5m
Platform Size	6.7m x 2.5m
Platform Length (deck extended)	9.8m
Max SWL	1000kg
Weight	25000kg

Alternative machines

M250
SL245
S280-25

Manufacturer

Liftlux

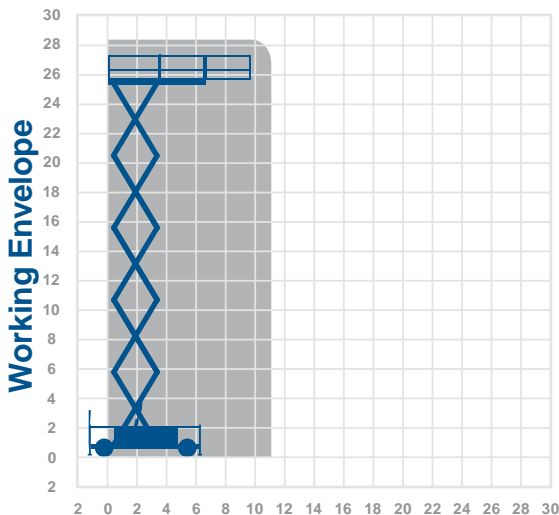

0345 745 0000

nationwideplatforms.co.uk

Working Height 33.5m


Closed Length	7.02m
Closed Height	3.63m
Stowed Height (guardrails lowered)	2.87m
Closed Width	2.98m
Platform Size	6.66m x 2.80m
Platform Length (deck extended)	9.66m
Max SWL	1000kg
Weight	31350kg

Alternative machines
S280-25
LL26X

Manufacturer
Holland Lift



Working Envelope

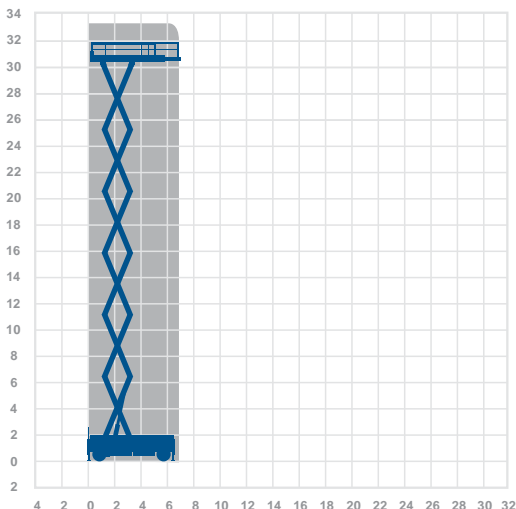

Working at height or supporting those who are? Find the solutions you need by visiting our website for information on our hire fleet, training services, safety innovations and more!





0345 745 0000

nationwideplatforms.co.uk

Boom Lifts



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk

97

Boom Lifts

- More than 6,100 units available to hire across the UK
- Working heights from 10m to 56m
- Variety of power options
- Narrow aisle machines
- Telescopic or articulating action
- Rough terrain tyre option
- Non-marking tyres for use on finished floors

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**



Working Height 10.0m Horizontal Outreach 3.0m

Closed Length	2.62m
Closed Height	1.99m
Closed Width	1.0m
Platform Size	0.9m x 0.7m
Rotation	360°
Max SWL	200kg
Weight	2760kg

Alternative machines


Star10 A

Manufacturer

Haulotte



Working Envelope

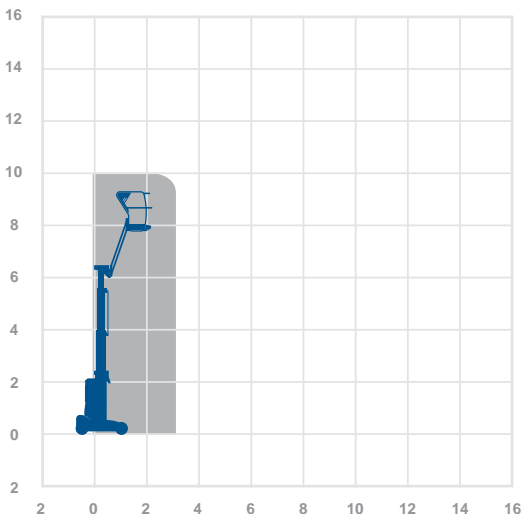

10.0m
3.0m



0345 745 0000

nationwideplatforms.co.uk

Working Height 10.0m Horizontal Outreach 3.0m

Closed Length	2.7m
Closed Height	1.99m
Closed Width	1.0m
Platform Size	0.98m x 0.78
Rotation	345°
Max SWL	200kg
Weight	2677kg

Alternative machines

Star10


Manufacturer

Haulotte

fitted with
manufacturers
secondary guarding
as standard



Working Envelope

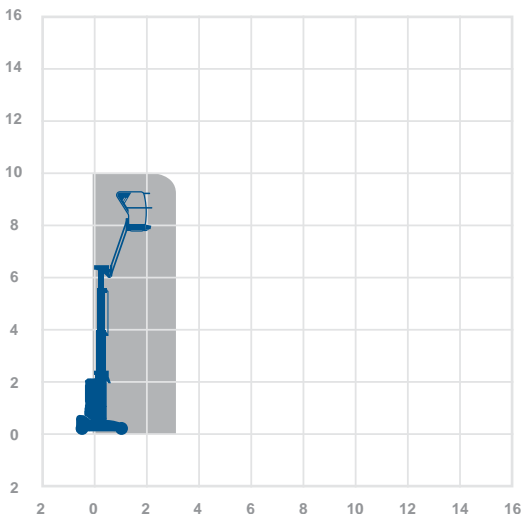

10.0m
3.0m

Working Height 10.1m Horizontal Outreach 3.38m

Closed Length	2.82m
Closed Height	1.99m
Closed Width	0.99m
Platform Size	0.90m x 0.70m
Rotation	360°
Max SWL	200kg
Weight	2980kg

Alternative machines


Star10
Star10A
Toucan12E+

Manufacturer

JLG



Working Envelope

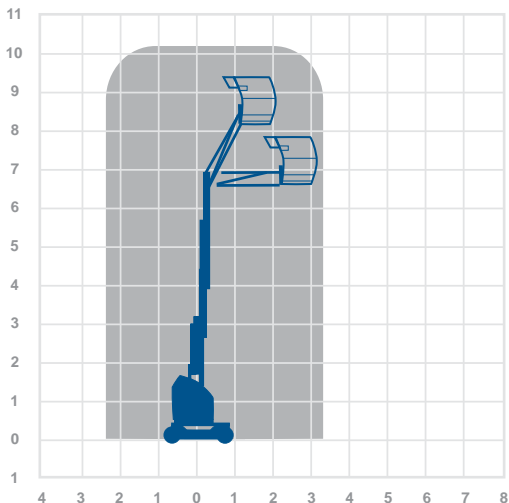

0345 745 0000

nationwideplatforms.co.uk

Working Height 10.89m Horizontal Outreach 6.25m


Closed Length	5.31m
Closed Height	2.0m
Closed Width	1.19m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6450kg

Alternative machines

30JP
30J
40NJ
G30N

Manufacturer

Genie

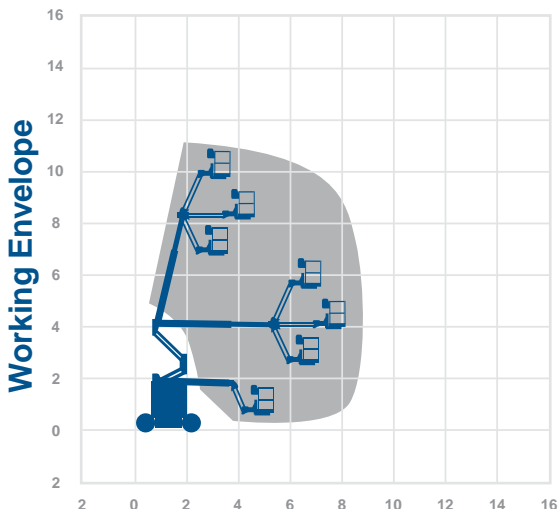

Working Height 11.0m

Horizontal Outreach 6.4m

Closed Length	5.2m
Closed Height	2.0m
Closed Width	1.2m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6577kg

Alternative machines


30JP
Z30N

Manufacturer

Genie



Working Envelope

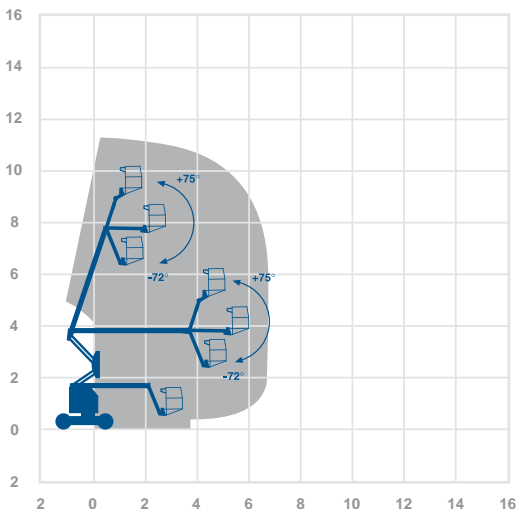

0345 745 0000

nationwideplatforms.co.uk

Working Height 11.14m

Horizontal Outreach 6.25m

Closed Length	5.59m
Closed Height	2.0m
Closed Width	1.22m
Platform Size	1.22m x 0.76m
Rotation	140°
Max SWL	227kg
Weight	6849kg

Alternative machines

G30N

Z30N


30J

Manufacturer

JLG



Working Envelope

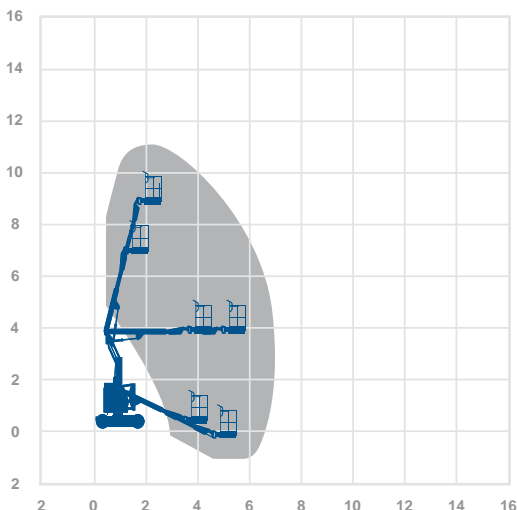

6.25m 11.14m

 **Nationwide Platforms**

A **LOXAM** Company

Working Height 11.68m

Horizontal Outreach 6.94m

Closed Length	5.36m
Closed Height	1.99m
Closed Width	1.2m
Platform Size	1.14m x 0.80m
Rotation	355°
Max SWL	250kg
Weight	7065kg

Alternative machines


G30N
Z30N
30JP

Manufacturer

Haulotte



Working Envelope

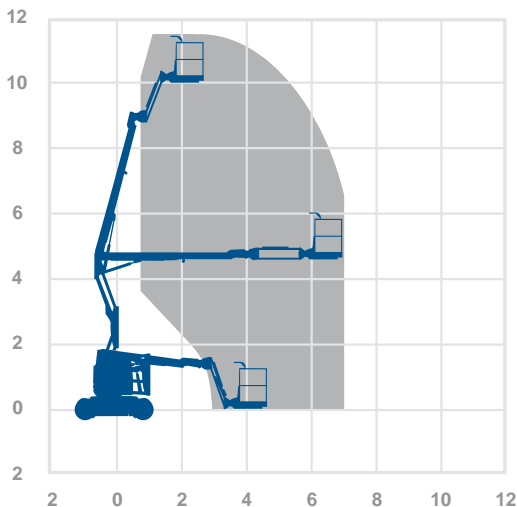

0345 745 0000

nationwideplatforms.co.uk

Working Height 12.0m

Horizontal Outreach 5.57m


Closed Length	4.17m
Closed Height	1.98m
Closed Width	1.5m
Platform Size	1.16m x 0.76m
Rotation	400°
Max SWL	200kg
Weight	3665kg

Alternative machines

HR12NB
HR12NBS

Manufacturer

Genie

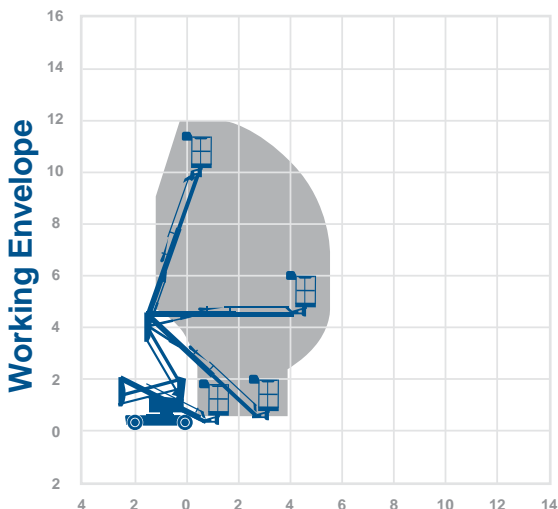

Working Height 12.2m Horizontal Outreach 6.1m

Closed Length	4.1m
Closed Height	1.9m
Closed Width	1.5m
Platform Size	1.10m x 0.65m
Rotation	360°
Max SWL	200kg
Weight	3060kg


Alternative machines

40NJ
HR15NB
HR12NB

Manufacturer

Niftylift

fitted with
manufacturers
secondary guarding
as standard

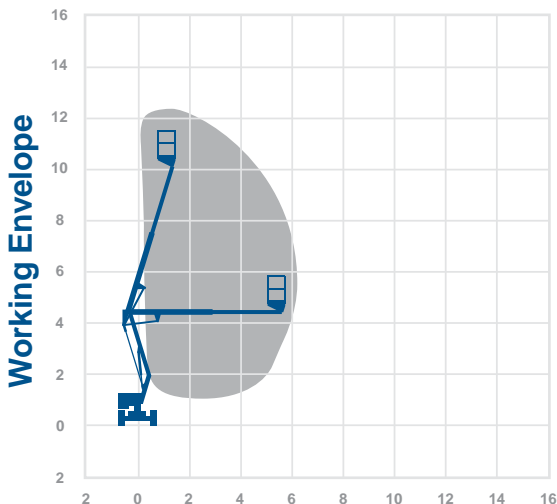

0345 745 0000

nationwideplatforms.co.uk

Working Height 12.52m

Horizontal Outreach 6.78m


Closed Length	5.72m
Closed Height	2.0m
Closed Width	1.47m
Platform Size	1.42m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	5171kg

Alternative machines

HR12NB
Z33
G34E
HR12NB

Manufacturer

Genie

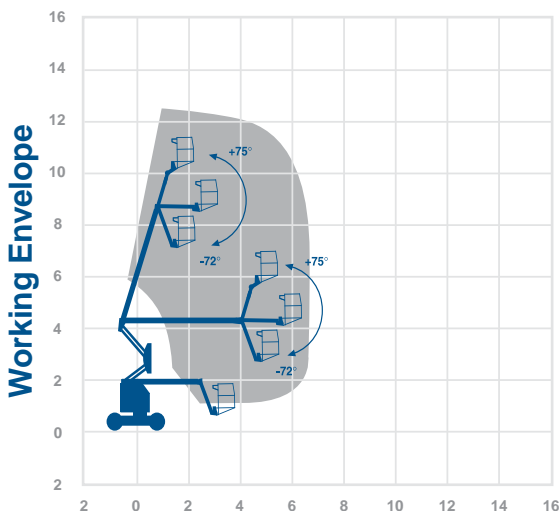

6.78m
12.52m


Working Height 12.65m
Horizontal Outreach 6.05m

Manufacturer
JLG

Closed Length	3.65m
Closed Height	1.99m
Closed Width	1.2m
Platform Size	1.05m x 0.70m
Rotation	345°
Max SWL	200kg
Weight	4900kg



Working Envelope

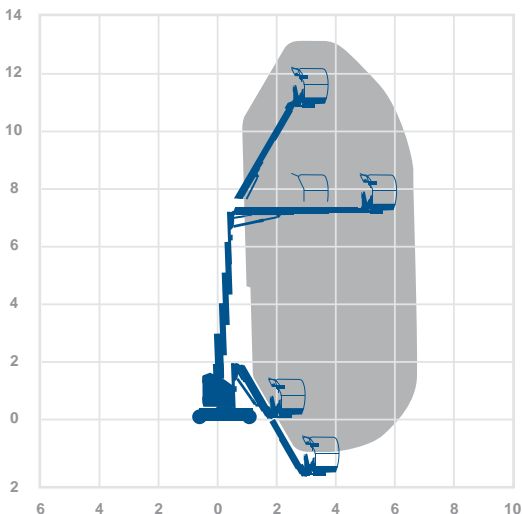

0345 745 0000

nationwideplatforms.co.uk

Working Height 12.62m Horizontal Outreach 6.78m


Closed Length	5.66m
Closed Height	2.06m
Closed Width	1.85m
Platform Size	1.42m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	4929kg

Alternative machines

G34D

Manufacturer

Genie

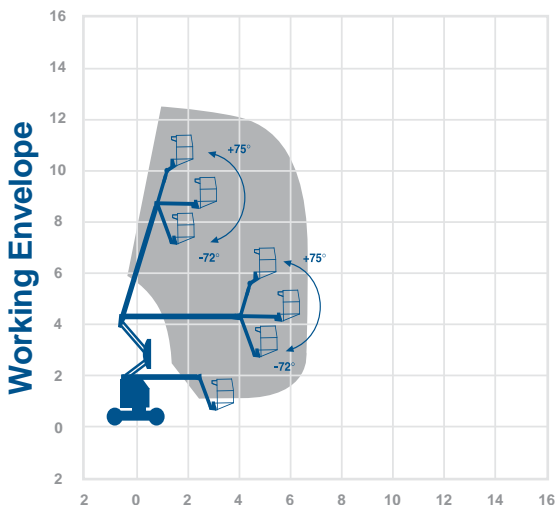

Nationwide Platforms

A **LOXAM** Company

40NJ

booms

Working Height 14.19m Horizontal Outreach 6.83m

Closed Length	6.71m
Closed Height	1.97m
Closed Width	1.5m
Platform Size	1.22m x 0.76m
Rotation	360°
Max SWL	230kg
Weight	6759kg

Alternative machines

HR15NB
Z45BJ


Manufacturer

JLG



14.19m
6.83m

Working Envelope

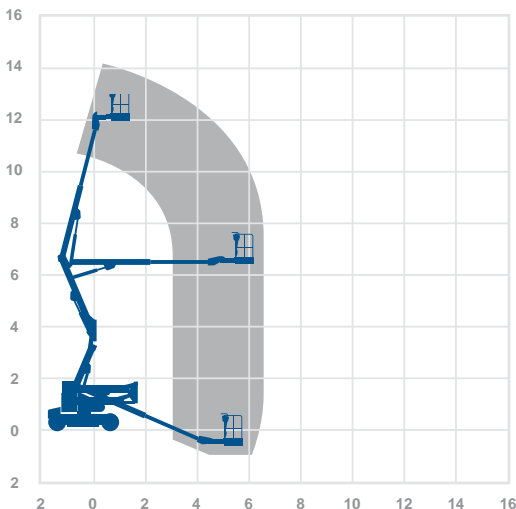

0345 745 0000

nationwideplatforms.co.uk

Working Height 14.2m Horizontal Outreach 8.0m


Closed Length	6.9m
Closed Height	2.9m
Closed Width	2.44m
Platform Size	6.7m x 2.28m
Rotation	180°
Max SWL	1800kg
Weight	11000kg

Alternative machines

TITAN60

Manufacturer

MEC

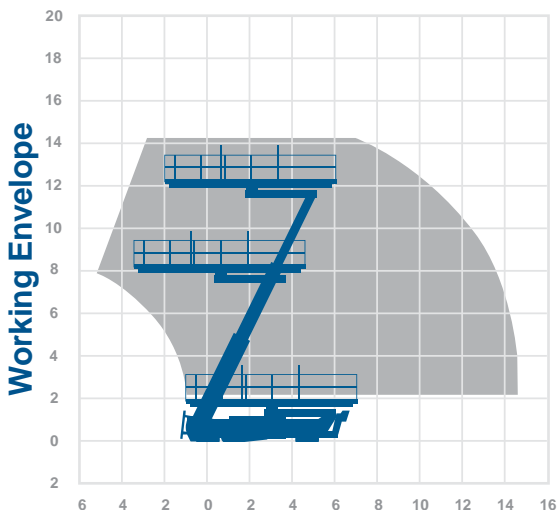

Working Height 14.87m

Horizontal Outreach 8.65m

Closed Length	6.65m
Closed Height	2.1m
Closed Width	1.52m
Platform Size	1.15m x 0.80m
Rotation	355°
Max SWL	230kg
Weight	7230kg

Alternative machines


HR15NBS
HR15NH

Manufacturer

Haulotte



Working Envelope

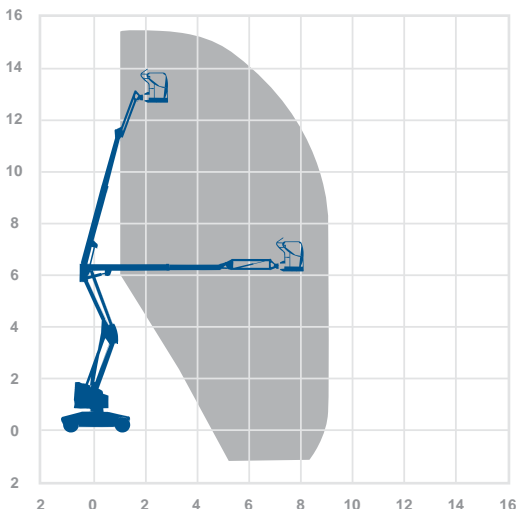

0345 745 0000

nationwideplatforms.co.uk

Working Height 15.4m Horizontal Outreach 9.6m

Closed Length	6.3m
Closed Height	2.1m
Closed Width	1.5m
Platform Size	1.5m x 0.7m
Rotation	360°
Max SWL	225kg
Weight	6680kg

Alternative machines

40NJ
Z45BJ
HR15NB

Manufacturer


Niftylift

fitted with
manufacturers
secondary guarding
as standard

Dual



Working Envelope

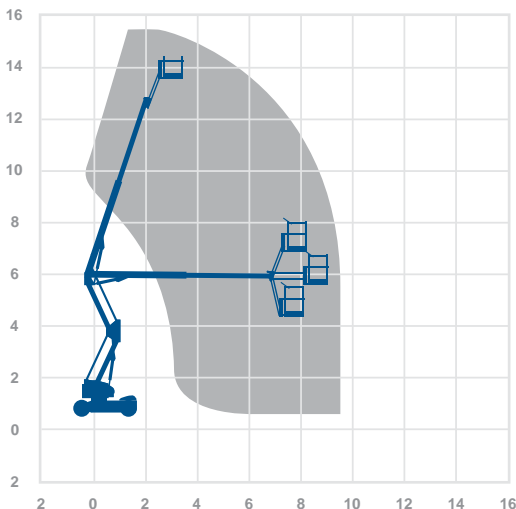

9.6m 15.4m

Working with materials at height?
Our videos explain how our
exclusive and award winning
safety innovations can save you
time and money.



Working Height 15.5m Horizontal Outreach 9.7m

Closed Length	6.4m
Closed Height	1.99m
Closed Width	1.5m
Platform Size	1.5m x 0.8m
Rotation	360°
Max SWL	225kg
Weight	7250kg

Alternative machines

HR15NBS


Manufacturer

Niftylift

fitted with
manufacturers
secondary guarding
as standard



Working Envelope

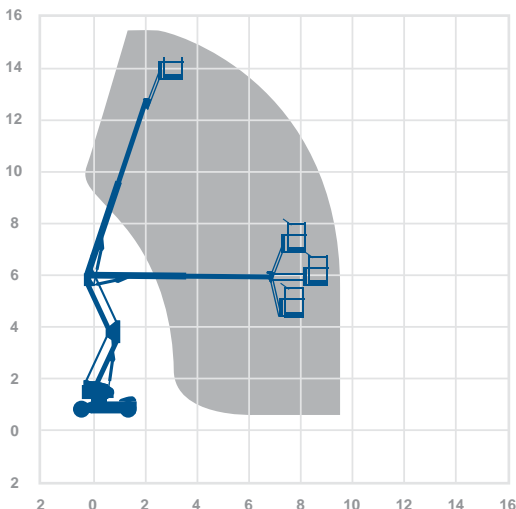

0345 745 0000

nationwideplatforms.co.uk

Working Height 15.69m
Horizontal Outreach 7.6m


Closed Length 6.78m
 Closed Height 2.08m
 Closed Width 2.23m
 Platform Size 1.82m x 0.76m
 Rotation 359°
 Max SWL 227kg
 Weight 6542kg (Air)
 6892kg (Foam Filled)

Alternative machines

Z45D
 Z45D-R
 Z4525DJX

Manufacturer

Genie

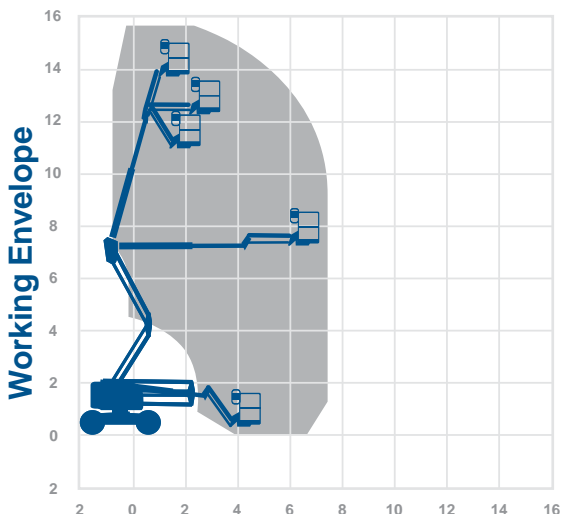

Working Height 15.7m Horizontal Outreach 9.4m

Closed Length	6.35m
Closed Height	2.1m
Closed Width	2m
Platform Size	1.80m x 0.65m
Rotation	360°
Max SWL	225kg
Weight	4600kg

Alternative machines

Z4525DJX
Z45DJX
45JSX
160ATJ


Manufacturer

Niftylift



15.7m
9.4m

Working Envelope

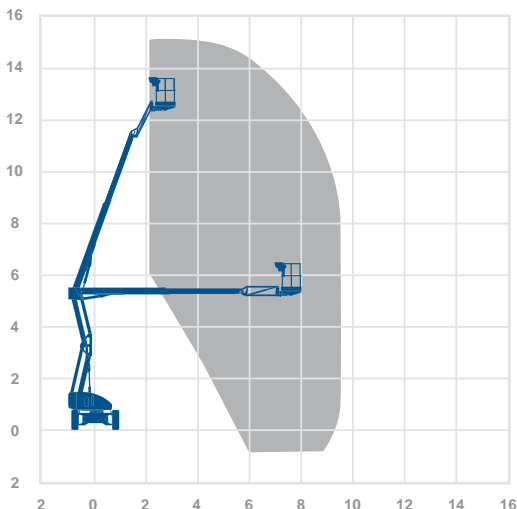

0345 745 0000

nationwideplatforms.co.uk

45MJ

booms

Working Height 15.72m Horizontal Outreach 7.24m


Closed Length	6.5m
Closed Height	2.01m
Closed Width	1.75m
Platform Size	1.52m x 0.76m
Rotation	360°
Max SWL	230kg
Weight	6532kg

Alternative machines

HR15NBS
Z45BJ
45MJP

Manufacturer

JLG

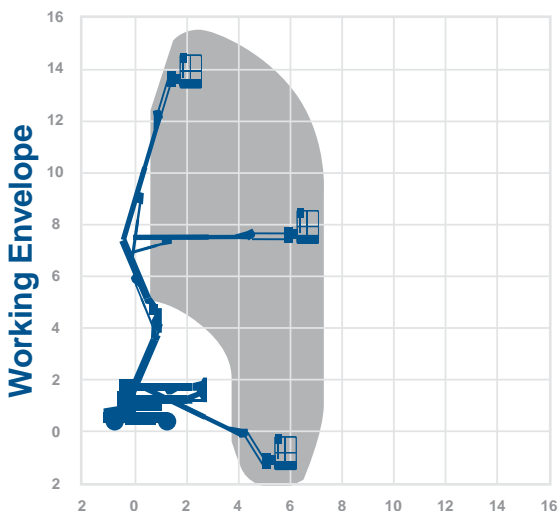


Working Height 15.72m

Horizontal Outreach 11.18m

Manufacturer
Genie

Closed Length	8.48m
Closed Height	2.49m
Closed Width	2.3m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	6709kg
Reach Below Ground	1.5m

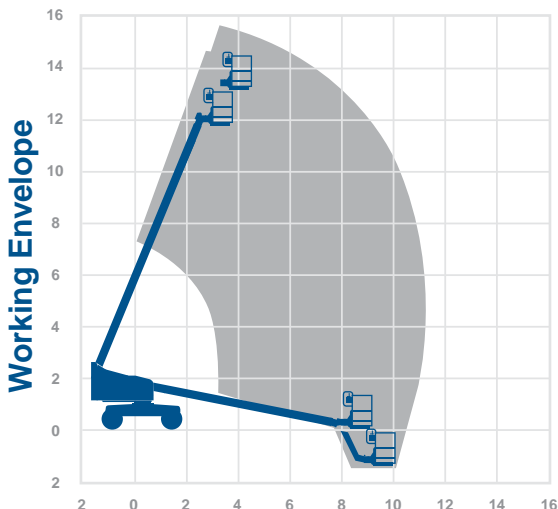

0345 745 0000

nationwideplatforms.co.uk

Working Height 15.72m

Horizontal Outreach 7.47m


Closed Length	6.58m
Closed Height	2.27m
Closed Width	2.35m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	230kg
Weight	7484kg

Alternative machines

HA16SPX
Z45DJX

Manufacturer

JLG

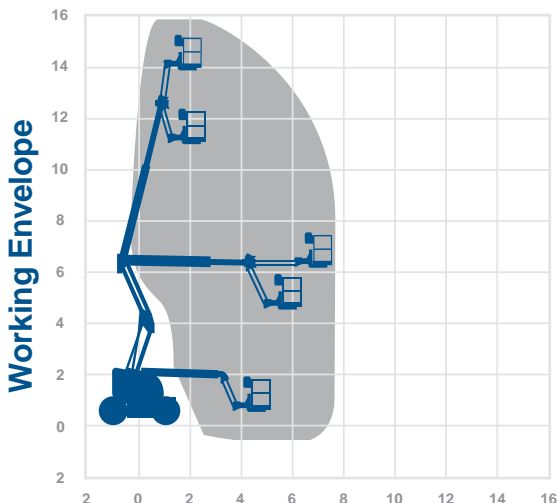



0345 745 0000

nationwideplatforms.co.uk

Working Height 15.86m
Horizontal Outreach 7.55m


Closed Length 6.66m
 Closed Height 2.25m
 Closed Width 2.29m
 Platform Size 1.83m x 0.76m
 Rotation 355°
 Max SWL 454kg
 Weight 6984kg

Alternative machines

Z45DJX
 45JSX
 HA16SPX

Manufacturer

Genie

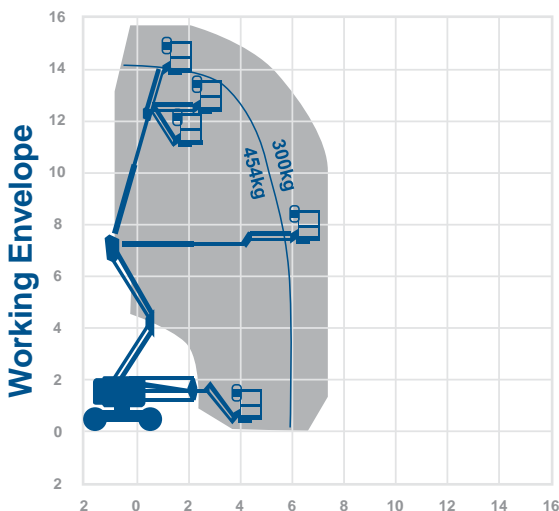

Working Height 15.94m Horizontal Outreach 7.65m


Closed Length	6.83m
Closed Height	2.0m
Closed Width	1.79m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7620kg

Alternative machines

Z45B
45MJ

Manufacturer

Genie

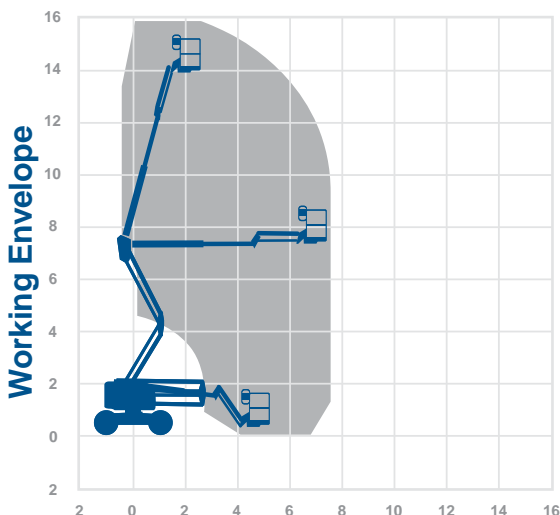

0345 745 0000

nationwideplatforms.co.uk



 **Nationwide Platforms**
A **LOXAM** Company

Working Height 16.0m

Horizontal Outreach 9.15m


Closed Length	6.95m
Closed Height	2.3m
Closed Width	2.3m
Platform Size	1.8m x 0.8m
Rotation	360°
Max SWL	230kg
Weight	6950kg

Alternative machines

Z4525DJX
45JSX
SJ46AJ

Manufacturer

Haulotte

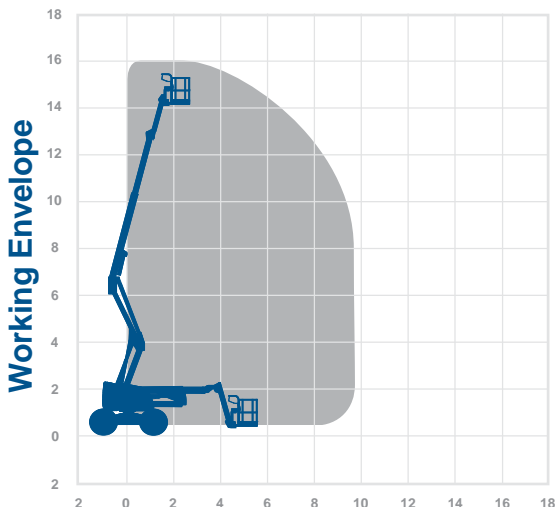

0345 745 0000

nationwideplatforms.co.uk

Working Height 16.0m
Horizontal Outreach 8.3m


Closed Length 6.75m
 Closed Height 2.3m
 Closed Width 2.3m
 Platform Size 1.83m x 0.8m
 Rotation 355°
 Max SWL 230kg
 Weight 6200kg

Alternative machines

Z4525DJX
 45JSX
 SJ46AJ

Manufacturer

Haulotte

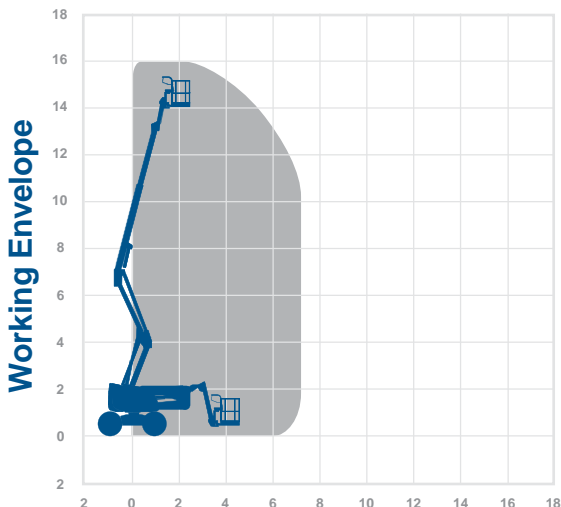

Working Height 16.05m
Horizontal Outreach 7.52m


Closed Length 6.65m
 Closed Height 2.13m
 Closed Width 2.29m
 Platform Size 1.83m x 0.76m
 Rotation 355°
 Max SWL 227kg
 Weight 6574kg

Alternative machines

Z45DJX
 45JSX

Manufacturer

Genie

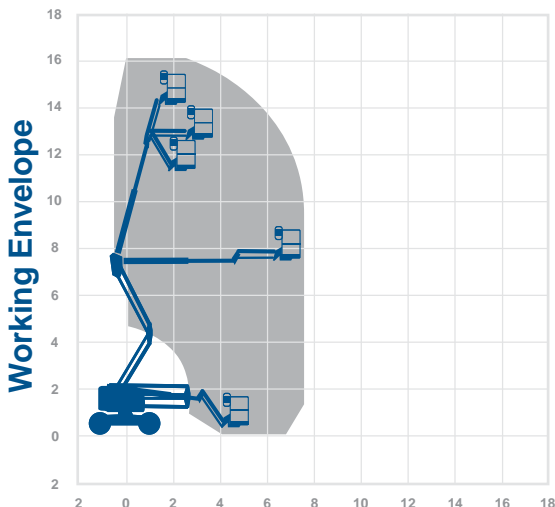

0345 745 0000

nationwideplatforms.co.uk

Working Height 16.1m
Horizontal Outreach 7.54m

Closed Length 6.5m
 Closed Height 2.07m
 Closed Width 2.29m
 Platform Size 1.83m x 0.76m
 Rotation 360°
 Max SWL 227kg
 Weight 6500kg

Alternative machines


Z4525DJX
 Z45DJX
 45JSX

Manufacturer

Skyjack



Working Envelope

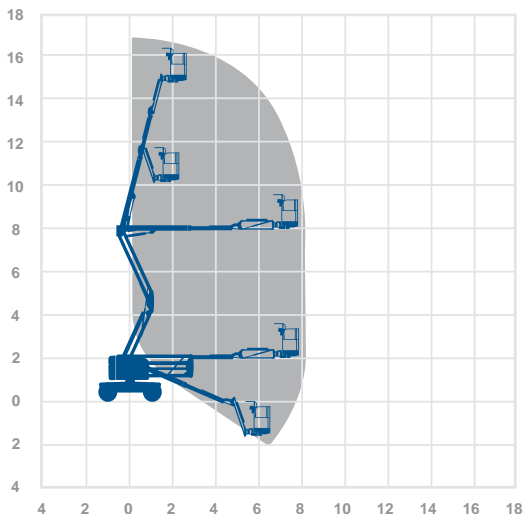

16.1m
 7.54m

Working Height 17.2m Horizontal Outreach 9.4m

Closed Length	6.35m
Closed Height	2.1m
Closed Width	2m
Platform Size	1.8m x 0.85m
Rotation	360°
Max SWL	225kg
Weight	5000kg

Alternative machines

HR21H


Manufacturer

Niftylift



17.2m
9.4m

Working Envelope

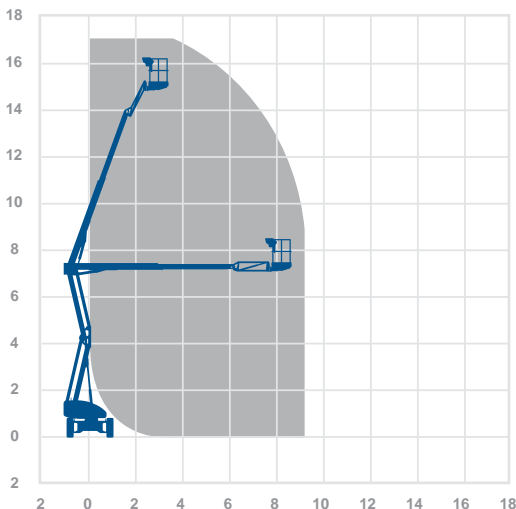

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.0m
Horizontal Outreach 14.6m
Outreach

Closed Length 7.0m
 Closed Height 3.4m
 Closed Width 2.6m
 Platform Size 6.7m x 2.28m
 Rotation 180°
 Max SWL 1350kg
 Weight 18000kg

Alternative machines

TITAN40

Manufacturer

MEC



RT⁴


S



MHA

IPAF 3b

Working Envelope

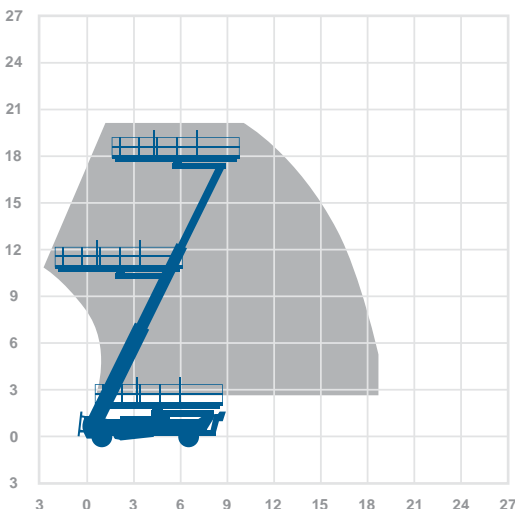

20.0m
14.6m

Working Height 20.16m
Horizontal Outreach 11.15m
Outreach


Closed Length	8.15m
Closed Height	2.54m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7756kg

Alternative machines

HR21H

Manufacturer

Genie

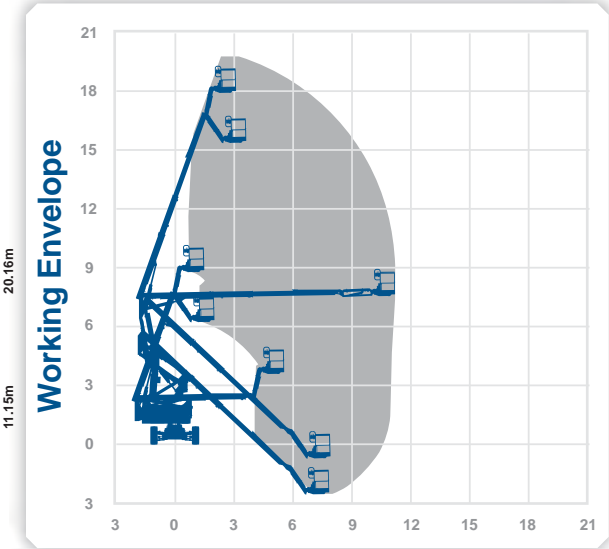

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.29m

Horizontal Outreach 12.12m


Closed Length	8.82m
Closed Height	2.56m
Closed Width	2.44m
Platform Size	1.83m x 0.91m
Rotation	180°
Max SWL	227kg
Weight	10650kg

Alternative machines

Z62
G60X
HR21D

Manufacturer

JLG

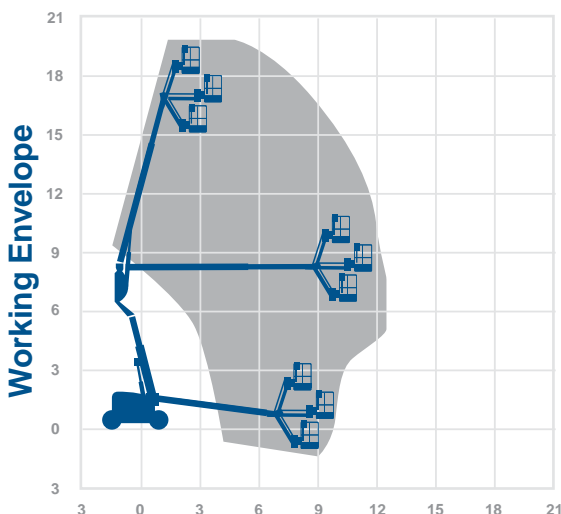

20.29m
12.12m

G60X

booms

Working Height 20.39m Horizontal Outreach 11.05m


Closed Length	8.15m
Closed Height	2.69m
Closed Width	2.46m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	10,025kg (Air) 10,765kg (Foam Filled)

Alternative machines

G60-R
HR21D
60HJX
Z62

Manufacturer

Genie

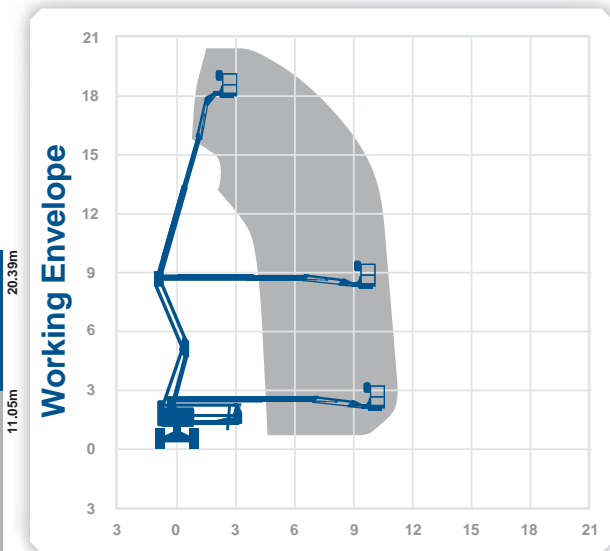

One day of powered access training, years of working safely at height. Call today and get trained with Nationwide Platforms.

Working Height 20.6m
Horizontal Outreach 12.2m


Closed Length 8.8m
Closed Height 2.51m
Closed Width 2.42m
Platform Size 1.83m x 0.80m
Rotation Continuous
Max SWL 230kg
Weight 9600kg

Alternative machines

G60X
HA260PX
HR21D

Manufacturer

Haulotte

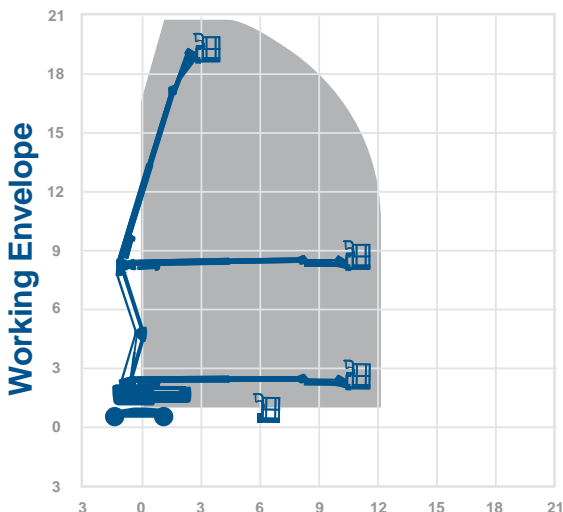

20.6m
12.2m

Working Height 20.65m Horizontal Outreach 13.5m


Closed Length	8.93m
Closed Height	2.67m
Closed Width	2.38m
Platform Size	1.8m x 0.8m
Rotation	360°
Max SWL	230kg
Weight	11710kg

Alternative machines

G60X

Manufacturer

Haulotte

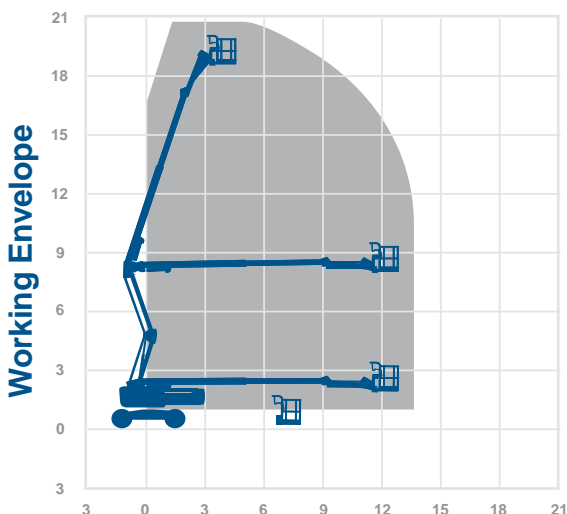

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.8m
Horizontal Outreach 12.5m


Closed Length 5.3m
Closed Height 2.15m
Closed Width 2.27m
Platform Size 1.80m x 0.85m
Rotation 360°
Max SWL 225kg
Weight 6220kg

Alternative machines

M60J
HR21H

Manufacturer

Niftylift

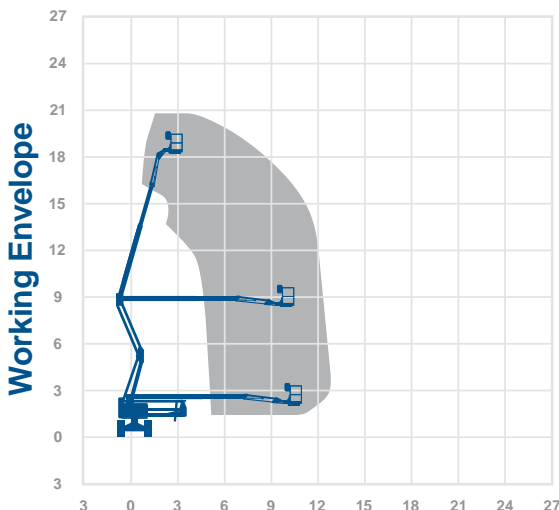

20.8m
12.5m

Working Height 20.8m Horizontal Outreach 12.5m

Closed Length	5.3m
Closed Height	2.15m
Closed Width	2.27m
Platform Size	1.80m x 0.85m
Rotation	360°
Max SWL	225kg
Weight	6500kg

Alternative machines

M60J
HR21B

Manufacturer


Niftylift

fitted with
manufacturers
secondary guarding
as standard



20.8m
12.5m

Working Envelope

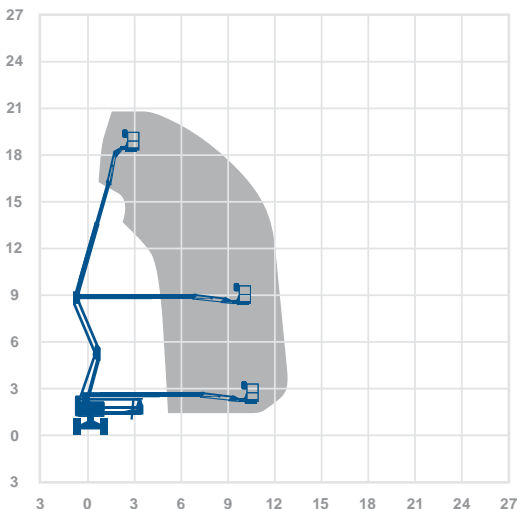

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.8m
Horizontal Outreach 12.5m

Closed Length 5.3m
Closed Height 2.15m
Closed Width 2.27m
Platform Size 1.8m x 0.85m
Rotation 360°
Max SWL 225kg
Weight 6220kg

Alternative machines


HA20PX
G60X

Manufacturer

Niftylift



Working Envelope

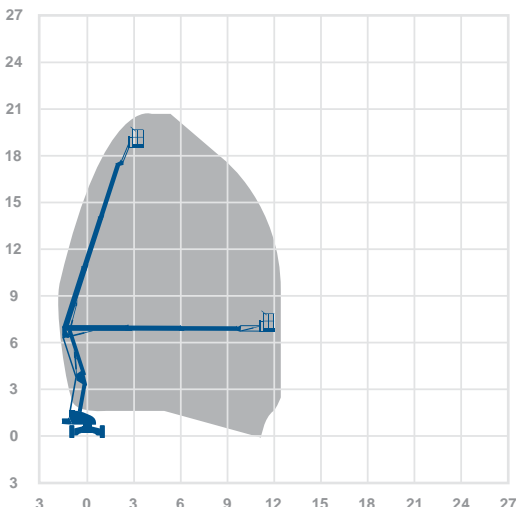

20.8m
12.5m

Working Height 20.87m

Horizontal Outreach 12.47m


Closed Length	9.25m
Closed Height	2.4m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	10766kg

Alternative machines

G60X
60AJX

Manufacturer

Genie

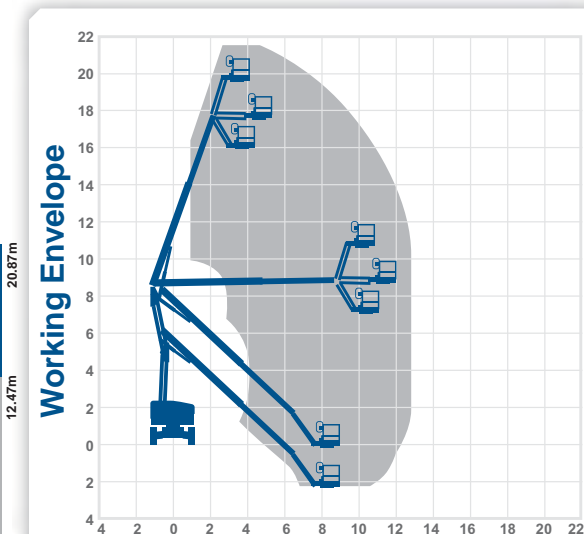

0345 745 0000

nationwideplatforms.co.uk

Working Height 21.8m
Horizontal Outreach 17.1m


Closed Length 9.5m
 Closed Height 2.72m
 Closed Width 2.5m
 Platform Size 1.83m x 0.76m
 Rotation Continuous
 Max SWL 227kg
 Weight 10102kg
 Reach Below Ground 2.71m

Alternative machines

G65X
 66JX

Manufacturer

Genie

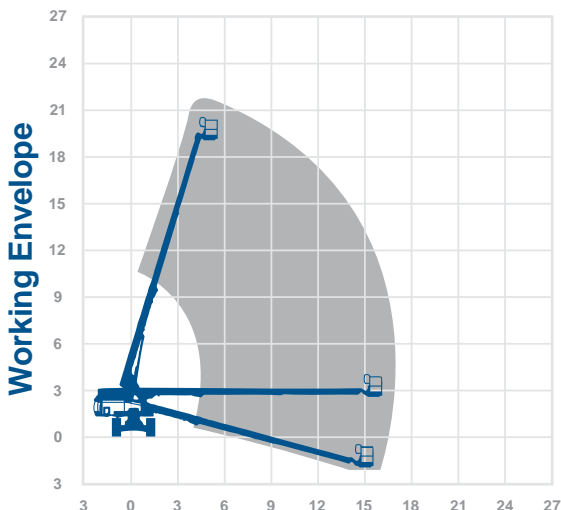

66JX

booms

Working Height 22.12m Horizontal Outreach 17.3m

Closed Length	10.21m
Closed Height	2.56m
Closed Width	2.43m
Platform Size	1.83m x 0.91m
Rotation	180°
Max SWL	227kg
Weight	13500kg

Alternative machines

S65X
G65
G65X

Manufacturer

JLG



RT⁴


S



IPAF
3b

17.3m 22.12m

Working Envelope

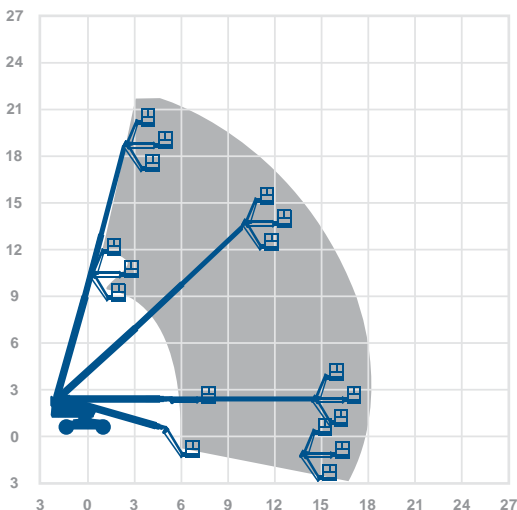

Your powered access solution is just a few clicks away. To find the right machine for your project, visit our website and follow our step by step 'New to Platforms' guide.

Working Height 22.5m
Horizontal Outreach 18.3m


Closed Length 10.4m
 Closed Height 2.7m
 Closed Width 2.47m
 Platform Size 2.44m x 0.91m
 Rotation Continuous
 Max SWL 230kg
 Weight 13400kg
 Reach Below Ground 4m

Alternative machines

S65X
 66JX

Manufacturer

Haulotte

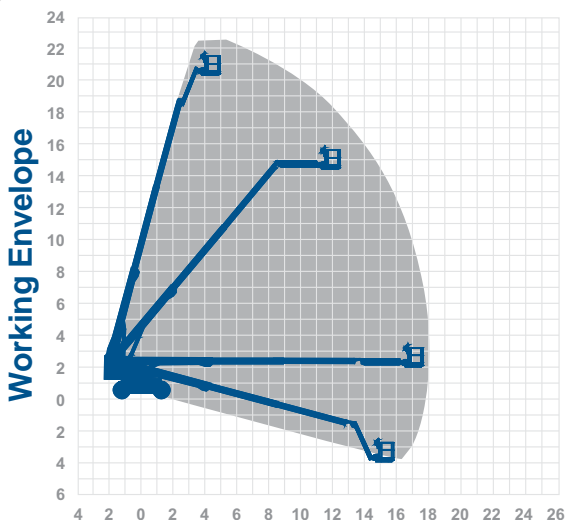

18.3m 22.5m

Z80

booms

Working Height 25.6m Horizontal Outreach 18.29m

Closed Length	11.27m
Closed Height	3.0m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	17010kg

Alternative machines


80JX

Manufacturer

Genie



Working Envelope

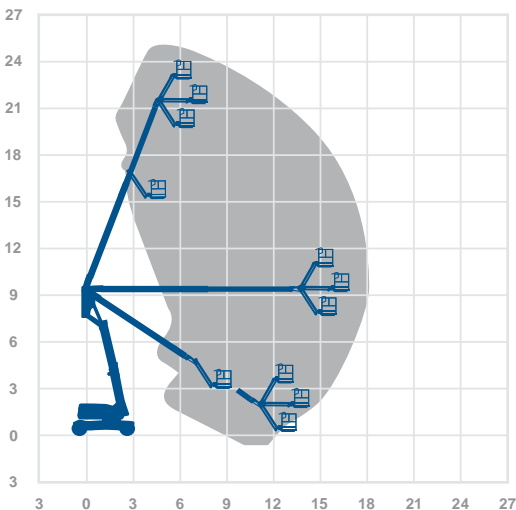

Learn more about our award-winning SkySiren® secondary guarding system by visiting the video gallery on our website.

Working Height 25.6m
Horizontal Outreach 16.2m

Closed Length 12.0m
 Closed Height 2.71m
 Closed Width 2.4m
 Platform Size 1.8m x 0.8m
 Rotation 360°
 Max SWL 230kg
 Weight 15890kg

Alternative machines


80JX
 Z80

Manufacturer

Haulotte



Working Envelope

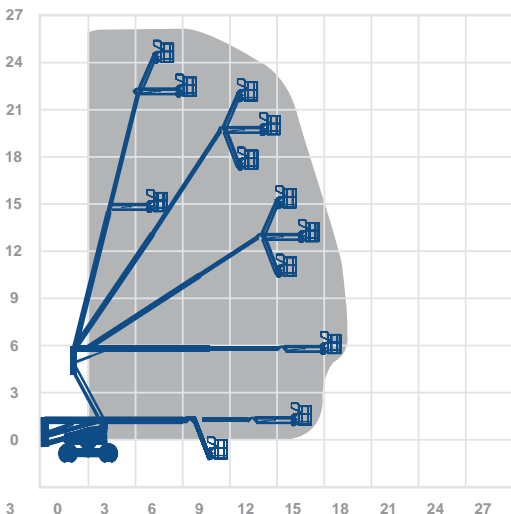

Nationwide Platforms

A **LOXAM** Company

80JX

booms

Working Height 26.38m Horizontal Outreach 15.74m

Closed Length	11.12m
Closed Height	3.0m
Closed Width	2.44m
Platform Size	1.83m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	15600kg

Alternative machines

Z80

Manufacturer

JLG




RT⁴

A



IPAF
3b

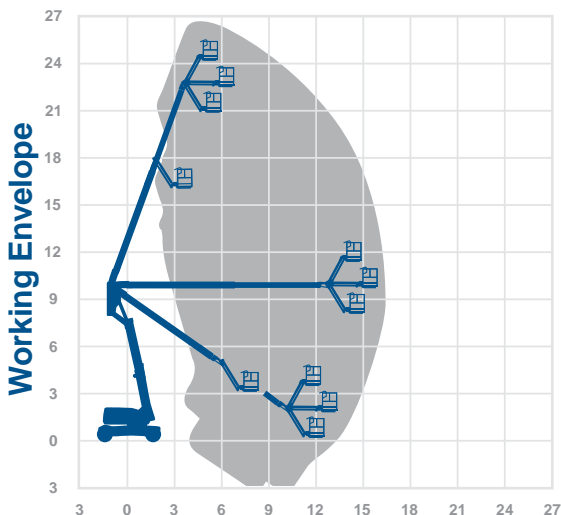

0345 745 0000

nationwideplatforms.co.uk



Image of our
Z135 taken by
Andrew Jones,
Onsite MEWP
Coordinator,
North Wales

Working Height 27.7m

Horizontal Outreach 23.4m


Closed Length	12.4m
Closed Height	2.8m
Closed Width	2.4m
Platform Size	1.8m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	16500kg
Reach Below Ground	2.89m
Operational Full Width	3.07m

Alternative machines

G85
860SJ

Manufacturer

Genie

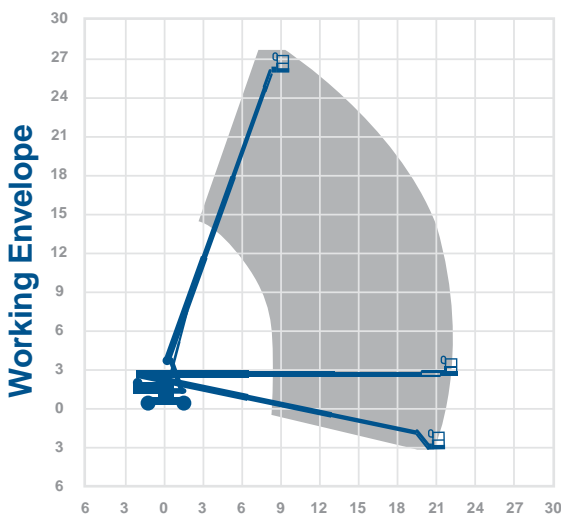

0345 745 0000

nationwideplatforms.co.uk

Working Height 27.9m

Horizontal Outreach 23.32m


Closed Length	12.4m
Closed Height	2.8m
Closed Width	2.5m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	17236kg
Reach Below Ground	2.89m

Alternative machines

860SJ
G85X

Manufacturer

Genie

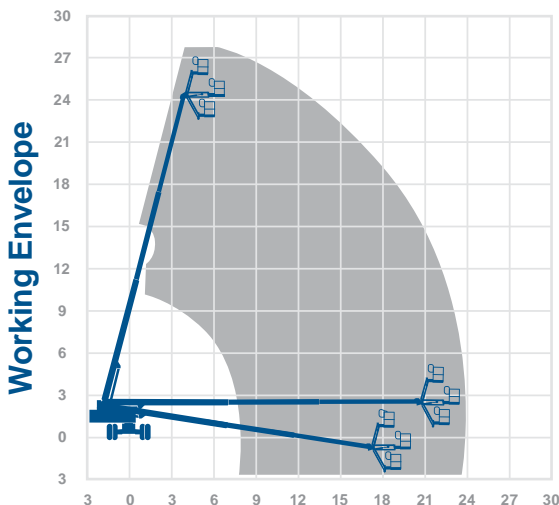

Working Height 28.0m Horizontal Outreach 19.0m

Closed Length	9.28m
Closed Height	2.7m
Closed Width	2.49m
Platform Size	2.4m x 0.9m
Rotation	360°
Max SWL	280kg
Weight	14700kg

Alternative machines

Z80
80J

Manufacturer

Niftylift

fitted with
manufacturers
secondary guarding
as standard



RT⁴


A



IPAF
3b

28.0m
19.0m

Working Envelope

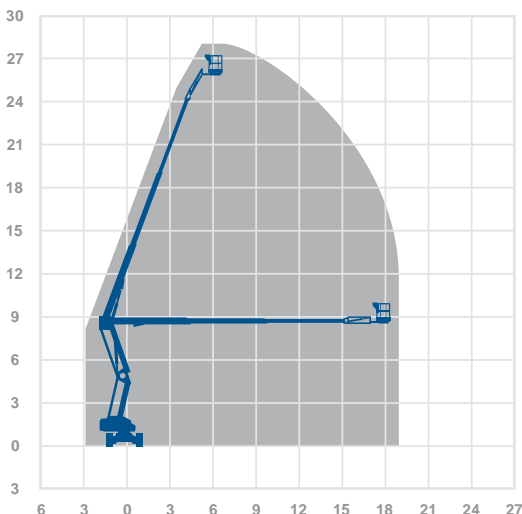

0345 745 0000

nationwideplatforms.co.uk

860SJ

booms

Working Height 28.21m Horizontal Outreach 22.86m

Closed Length	12.19m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	227kg
Weight	16511kg
Reach Below Ground	3.0m

Alternative machines


G85X

Manufacturer

JLG



Working Envelope

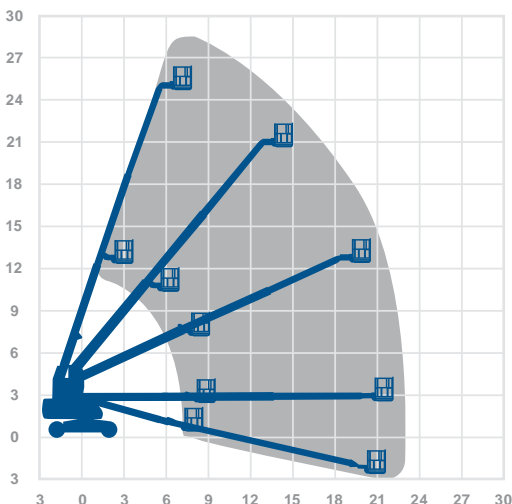

22.86m 28.21m

You can find the latest promotions, competitions and news from Nationwide Platforms by following us on our social media pages.



Working Height 31.8m

Horizontal Outreach 21.3m


Closed Length	11.16m
Closed Height	2.7m
Closed Width	2.5m
Platform Size (extended)	2.44(3.33)m 0.80m
Rotation	Continuous
Max SWL	250kg
Weight	20800kg
Reach Below Ground	4.0m

Alternative machines

1250AJP

Manufacturer

Haulotte

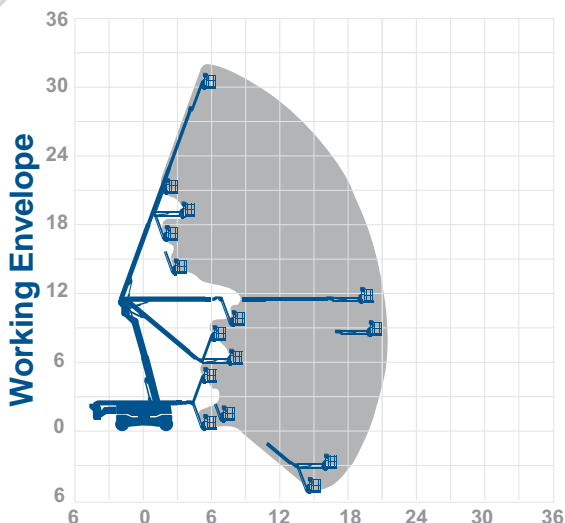

0345 745 0000

nationwideplatforms.co.uk

Working Height 38.73m
Horizontal Outreach 22.86m

Closed Length 10.64m
 Closed Height 3.05m
 Closed Width 2.49m
 Platform Size 2.44m x 0.91m
 Rotation Continuous
 Max SWL 230kg
 Weight 18500kg
 Operational Full Width 3.81m

Alternative machines


S125

Manufacturer

JLG



Working Envelope

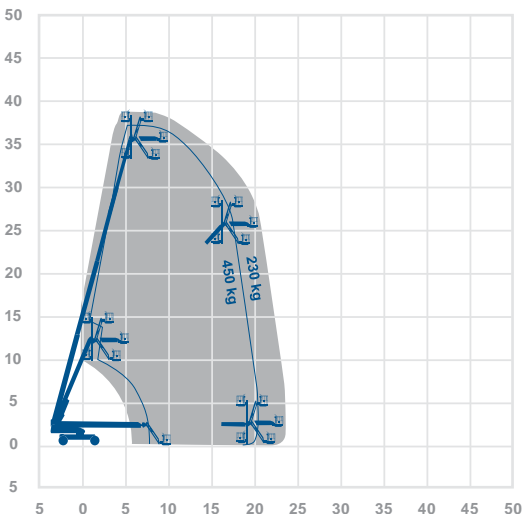

38.73m

22.86m

Nationwide Platforms

A **LOXAM** Company

1250AJP

booms

Working Height **40.1m** Horizontal Outreach **19.25m**

Closed Length	11.45m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	230kg
Weight	19958kg
Operational Full Width	3.81m

Alternative machines

1350SJP
Z135

Manufacturer


JLG

40.1m

19.25m



Working Envelope

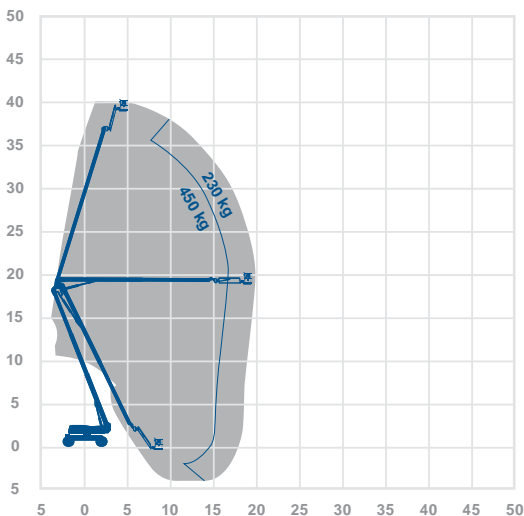

MAKING A
POSITIVE
IMPRESSION

As a business, we are more than the services we provide; we are committed to making a positive impression on the workplaces, environments, markets and communities we serve.

Working Height 40.15m

Horizontal Outreach 24.38m

Closed Length	14.25m
Closed Height	3.07m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	20248kg
Operational Full Width	3.35m

Alternative machines


1200SJP
1350SJP

Manufacturer

Genie



Working Envelope

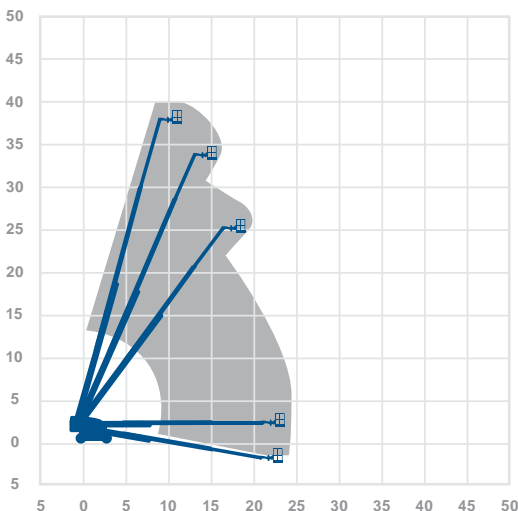

40.15m

24.38m

Working Height 41.5m

Horizontal Outreach 20.1m

Closed Length	13.1m
Closed Height	3.0m
Closed Width	2.53m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	23900kg
Reach Below Ground	1.5m
Operational Full Width	3.3m

Alternative machines

Z135
1250AJP

Manufacturer


Haulotte

41.5m

20.1m



Working Envelope

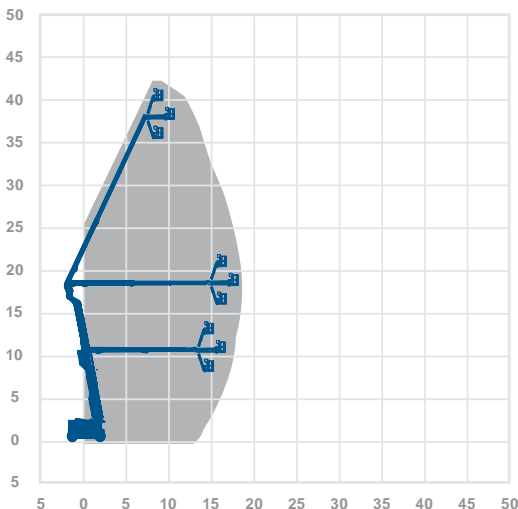

0345 745 0000

nationwideplatforms.co.uk

Working Height 43.15m

Horizontal Outreach 21.26m

Closed Length	12.93m
Closed Height	3.07m
Closed Width	2.46m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20366kg
Reach Below Ground	5.87m
Operational Full Width	3.94m

Alternative machines


1350SJP
1250AJP
ZX135

Manufacturer

Genie



Working Envelope

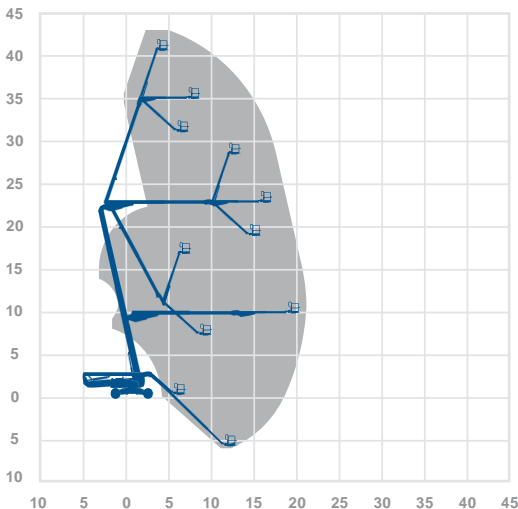

43.15m

21.26m

The UK Contractors Group has mandated IPAF PAL+ training for netters, steel erectors and their associated trades. Make sure your employees are compliant.



Working Height 43.15m Horizontal Outreach 21.26m

Closed Length	12.93m
Closed Height	3.09m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20502kg
Reach Below Ground	5.87m
Operational Full Width	5.03m

Alternative machines


Z135
1350SJP
1250AJP

Manufacturer

Genie

43.15m

21.26m

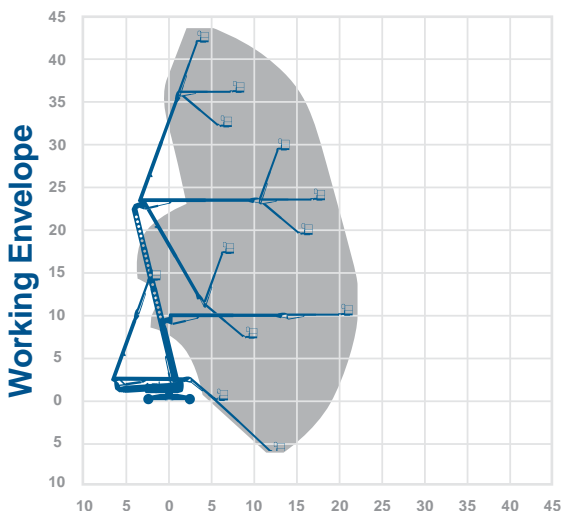

0345 745 0000


nationwideplatforms.co.uk

Working Height 43.15m
Horizontal Outreach 27.43m

Closed Length	19.76m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	454kg
Weight	21747kg
Reach Below Ground	6.0m
Operational Full Width	3.94m

Alternative machines
1350SJP

Manufacturer
Genie

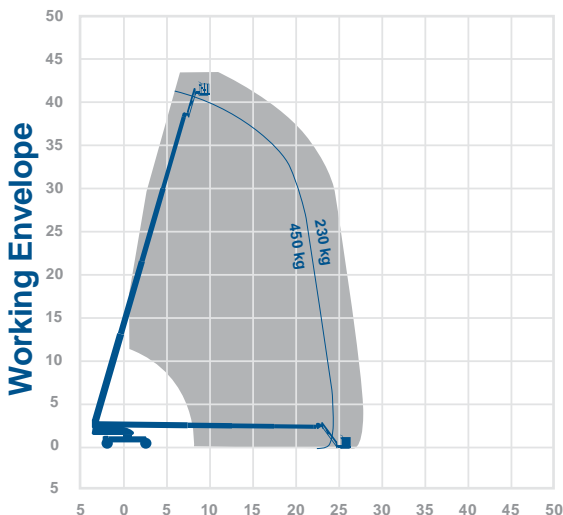

1350SJP

booms

Working Height 43.3m Horizontal Outreach 24.38m

Closed Length	11.86m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	230kg
Weight	20400kg
Operational Full Width	3.81m

Alternative machines


Z135
1200SJP
S125

Manufacturer

JLG

43.3m

24.38m

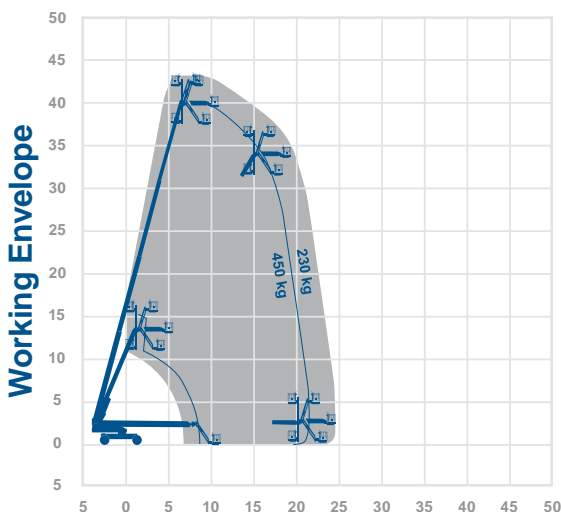

0345 745 0000

nationwideplatforms.co.uk

Working Height 48.02m
Horizontal Outreach 24.38m

Closed Length 16.18m
 Closed Height 3.05m
 Closed Width 2.49m
 Platform Size 2.44m x 0.91m
 Rotation Continuous
 Max SWL 340kg
 Weight 23236kg
 Reach Below Ground 0.91m
 Operational Full Width 5.03m

Alternative machines


SX180

Manufacturer

Genie



Working Envelope

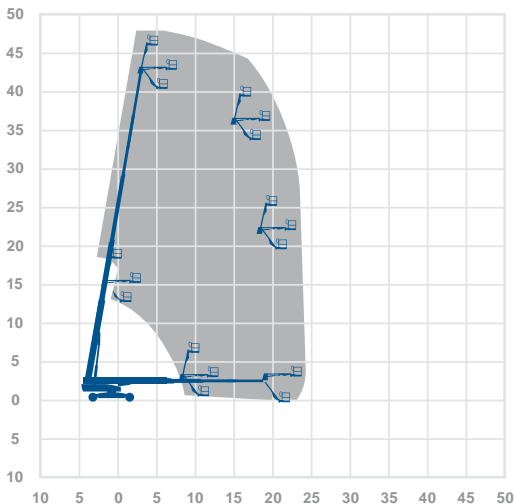

48.02m

24.38m

Working Height 48.15m


Horizontal Outreach 23.55m

Manufacturer
JLG

Closed Length	15.1m
Closed Height	3.1m
Closed Width	2.5m
Platform Size (extended)	2.44(5)m x 0.91m
Rotation	Continuous
Max SWL (extended)	450(270)kg
Weight	26127kg
Reach Below Ground	6.1m
Operational Full Width	5m



Working Envelope

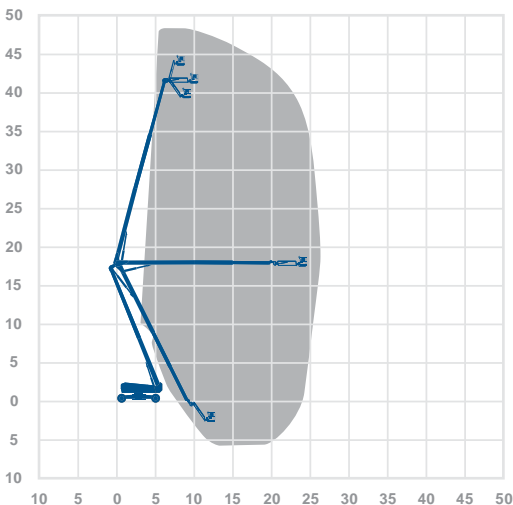

0345 745 0000

nationwideplatforms.co.uk

Working Height 56.86m


Horizontal Outreach 24.38m

Manufacturer
Genie

Closed Length	14.33m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	340kg
Weight	25095kg
Operational Full Width	5.03m



Working Envelope

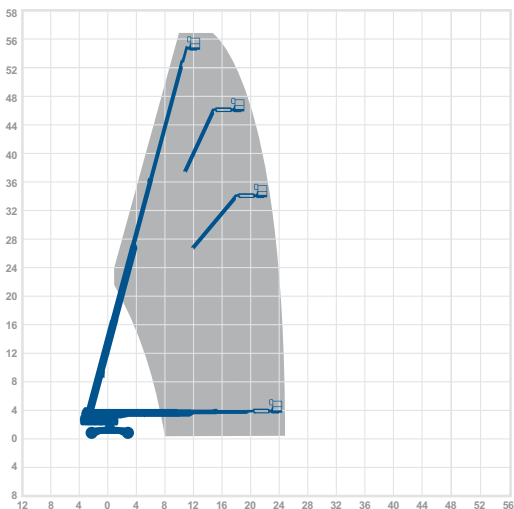



0345 745 0000

nationwideplatforms.co.uk

Van Mounted



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk

165

Van Mounted

- More than 290 units available to hire across the UK
- Versalift boom assemblies on most models
- All vehicles comply to EN280:2001 and are CE certified
- Dual roof mounted beacons/working lights
- Reverse alarms and night switches
- Steel bulkheads
- Internal racking, ply lining and hot and cold hand wash unit option available
- Tracker devices available as options on long term hires
- Operated or self-drive options available

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**



Working Height 13.0m Horizontal Outreach 7.0m

Max Horiz. Outreach (full SWL)	7.0m
Overall travel Length	6.74m
Overall travel Height	3.15m
Overall travel Width	2.2m
Platform/cage size	1.0m x 0.60m
Max SWL	200kg
Gross vehicle weight class	3500kg
Operational Full Width	2.45m
Minimum Operational width (straight down jacking)	As above

Alternative machines


V14E

Manufacturer

Versalift



Working Envelope

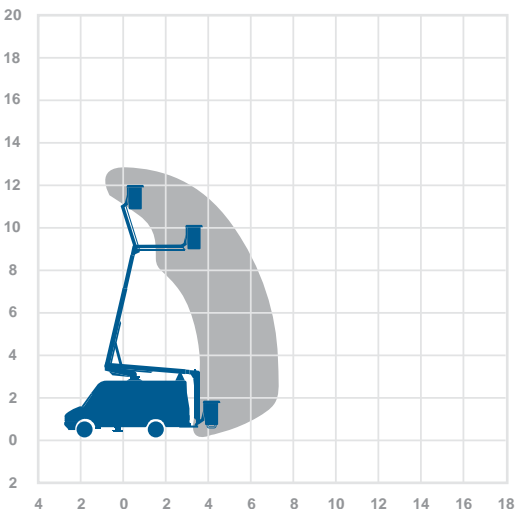

13.0m

7.0m

V14E

van mounts

Working Height 14.2m Horizontal Outreach 7.3m

Max Horiz. Outreach (full SWL)	7.3m
Overall travel Length	7.34m
Overall travel Height	3.8m
Overall travel Width	2.2m
Platform/cage size	1.0m x 0.6m
Max SWL	200kg
Gross vehicle weight class	5200kg
Operational Full Width	2.25m
Minimum Operational width (straight down jacking)	As above

Alternative machines

V16E

Manufacturer


Versalift

14.2m

7.3m



Working Envelope

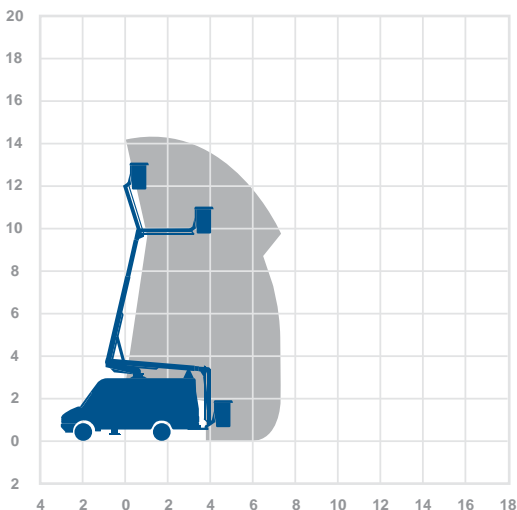

Sign up for our seasonal newsletters and we'll keep you up to date with an exclusive digest of our headline news, upcoming events and more!

Working Height 16.5m Horizontal Outreach 7.3m Outreach

Max Horiz. Outreach (full SWL)	7.3m
Overall travel Length	8.22m
Overall travel Height	4.0m
Overall travel Width	2.2m
Platform/cage size	1.0m x 0.6m
Max SWL	200kg
Gross vehicle weight class	6500kg
Operational Full Width	2.45m
Minimum Operational width (straight down jacking)	As above

Alternative machines


T16N
T17GS

Manufacturer

Versalift



Working Envelope

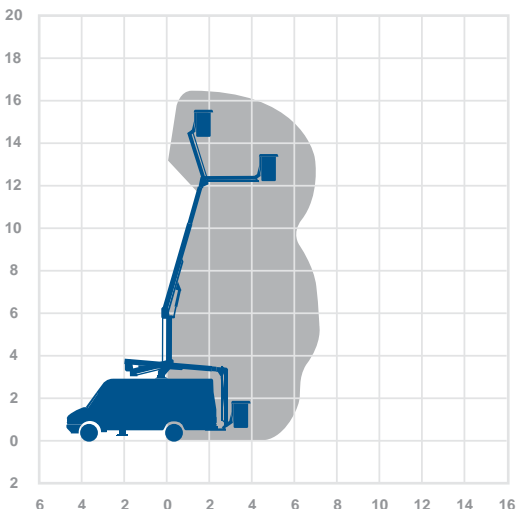



0345 745 0000

nationwideplatforms.co.uk

Truck Mounted

Truck Mounted



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk ¹⁷¹

Truck Mounted

- More than 300 units available to hire across the UK
- Working heights from 13m to 90m
- Self drive options up to 26m (3.5T and 7.5T chassis)
- All vehicles available with experienced IPAF trained operators
- Most cost effective method of access for short term hires
- Large fleet of 4 wheel drive machines – ideal for off road application
- Narrow jacking and zero tail swing models available
- Models with SWL of up to 700kg

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**




Working Height 13.3m Outreach 6.1m

Max Reach Below 0m	n/a
Overall Travel Length	4.7m
Overall Travel Height	2.6m
Overall Travel Width	2.0m
Platform Cage Size	1.0m X 0.6m
Max SWL	230kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.4m
Minimum Operational Width	2.4m
Point Load Front / Rear	20kN / 20kN

Manufacturer
Versalift



Working Envelope

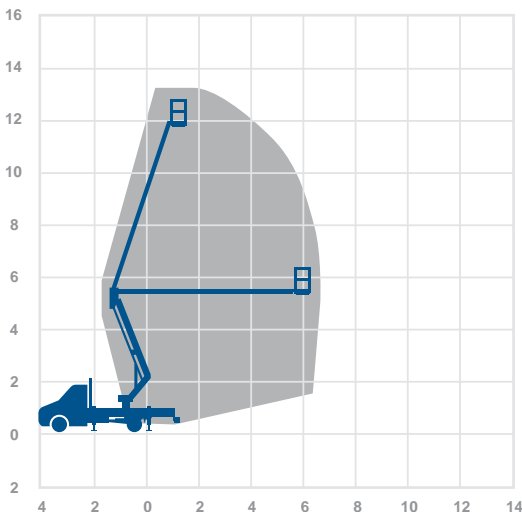

13.3m

6.1m


Working Height 14.0m Outreach 8.0m

Overall Travel Length	7.2m
Overall Travel Height	2.95m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	200kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.4m
Minimum Operational Width	2.4m
Point Load Front / Rear	28kN / 28kN

Manufacturer
GSR



Working Envelope

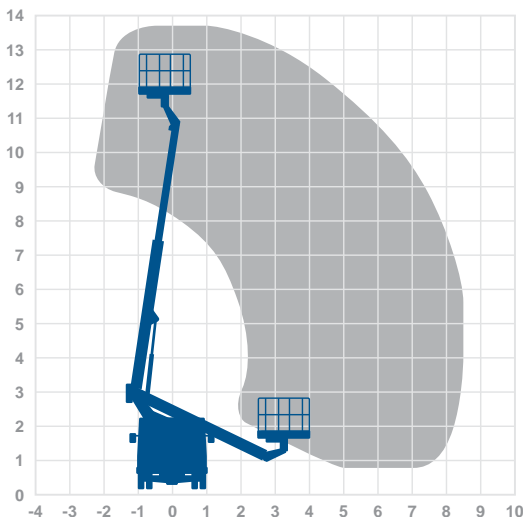

0345 745 0000

nationwideplatforms.co.uk

Working Height 17.2m Outreach 10.0m


Max Horiz. Outreach (full SWL)	8.0m
Overall Travel Length	7.2m
Overall Travel Height	3.7m
Overall Travel Width	2.5m
Platform Cage Size	1.0m x 0.6m
Max SWL	265kg
Gross Vehicle Weight	6500kg
Operational Full Width	2.4m
Minimum Operational Width	2.4m
Point Load Front / Rear	60kN / 60kN

Alternative
machines

T18AS

Manufacturer

GSR

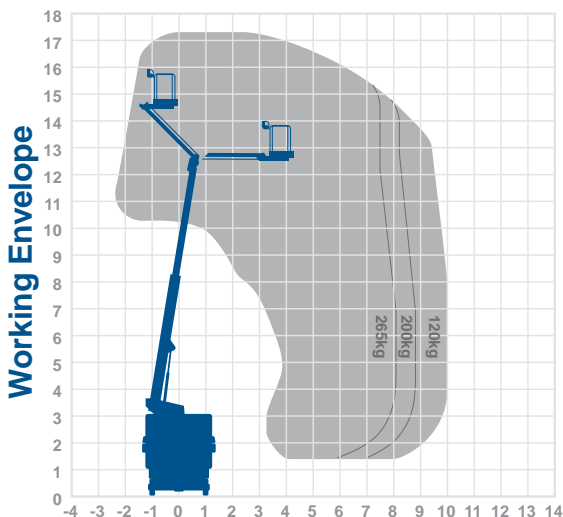

 **Nationwide Platforms**

A **LOXAM** Company



0345 745 0000

nationwideplatforms.co.uk

Working Height 17.1m Outreach 9.5m


Max Horiz. Outreach (full SWL)	6.7m
Overall Travel Length	7.1m
Overall Travel Height	2.95m
Overall Travel Width	2.2m
Platform Cage Size	1.4m x 0.7m
Max SWL	250kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.4m
Minimum Operational Width	2.4m
Point Load Front / Rear	28kN / 28kN

Alternative
machines

T18AS

Manufacturer

GSR

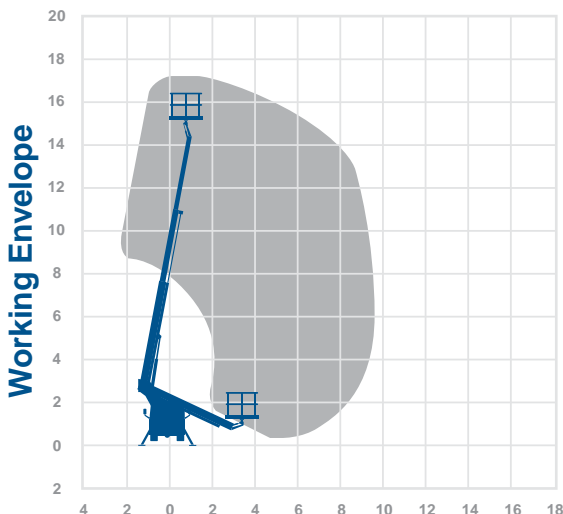

 **Nationwide Platforms**

A **LOXAM** Company

Working Height 18.0m Outreach 13.0m

Overall Travel Length	7.0m
Overall Travel Height	3.0m
Overall Travel Width	2.3m
Platform Cage Size	1.4m x 0.73m
Max SWL	230kg
Gross Vehicle Weight	3500kg
Operational Full Width	3.6m
Minimum Operational Width	2.3m
Point Load Front / Rear	28kN / 28kN

Alternative machines

T18ASH
T20M
T20HC
T20GS


Manufacturer

Ascendant



18.0m
13.0m

Working Envelope

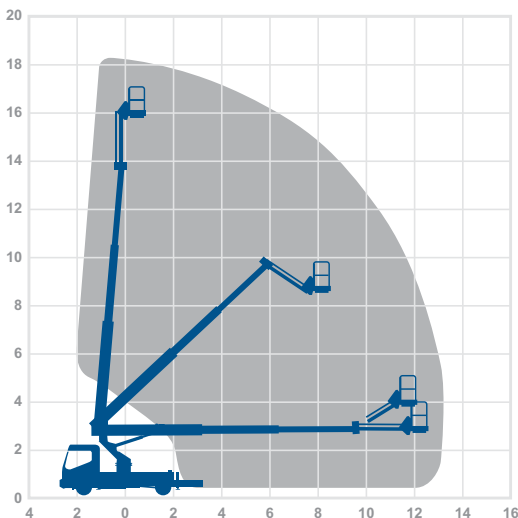

0345 745 0000

nationwideplatforms.co.uk

Working Height 18.0m Outreach 13.0m


Max Horiz. Outreach (full SWL)	13.0m
Overall Travel Length	7.0m
Overall Travel Height	3.0m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.73m
Max SWL	230kg
Gross Vehicle Weight	5000kg
Operational Full Width	3.8m
Minimum Operational Width	2.3m
Point Load Front / Rear	50kN / 50kN

Alternative
machines

T18AS

Manufacturer

Ascendant

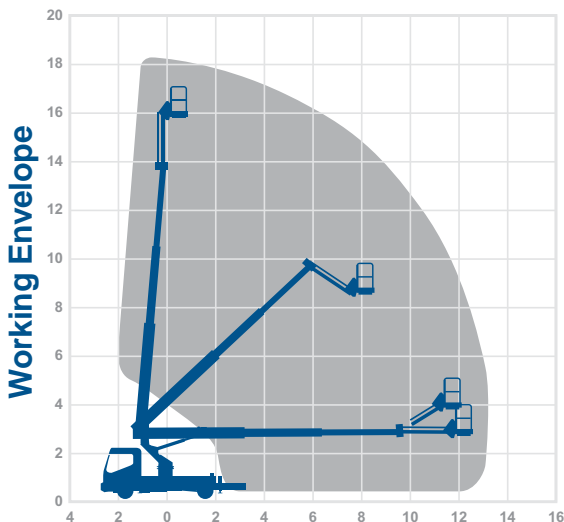

18.0m
13.0m

Working Height 20.0m Outreach 8.0m


Max Horiz. Outreach (full SWL)	8.0m
Max Reach Below 0m	n/a
Overall Travel Length	6.55m
Overall Travel Height	2.9m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	200kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.9m
Minimum Operational Width	2.9m
Point Load Front / Rear	28kN / 28kN

Alternative machines

T20M
T20HC
T21JC

Manufacturer

CTE

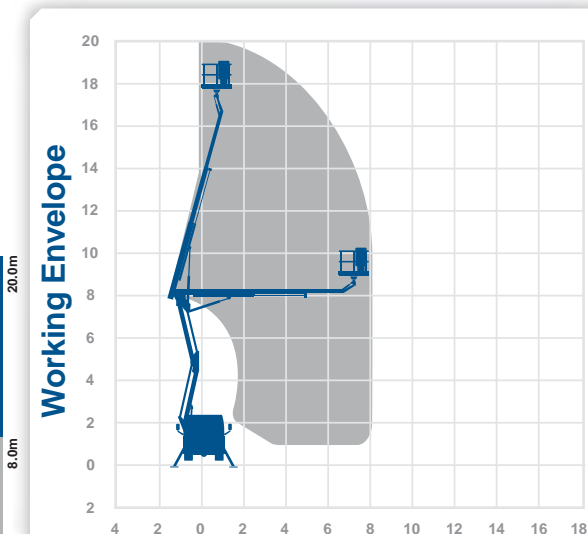

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.0m Outreach 9.0m


Overall Travel Length	6.76m
Overall Travel Height	2.5m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	300kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.93m
Minimum Operational Width	2.93m
Point Load Front / Rear	28kN / 28kN

Alternative
machines

T20M

Manufacturer

CTE

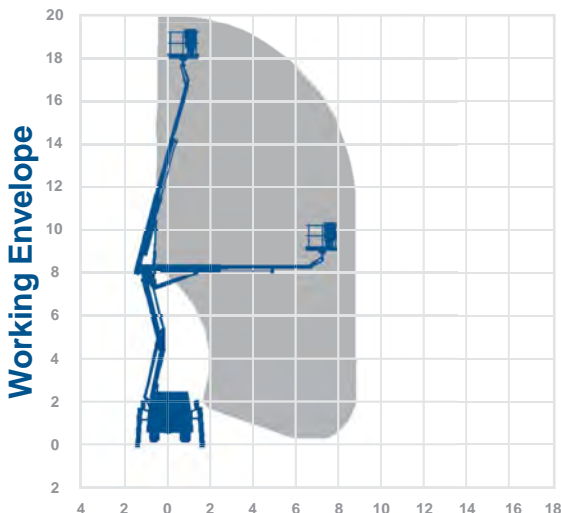

20.0m

9.0m

 **Nationwide Platforms**

A **LOXAM** Company

Working Height 20.0m Outreach 8.2m

Overall Travel Length	7.46m
Overall Travel Height	2.77m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	280kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.3m
Minimum Operational Width	2.3m
Point Load Front / Rear	25kN / 18kN

Alternative
machines

T21JC


Manufacturer

GSR



20.0m
8.2m

Working Envelope

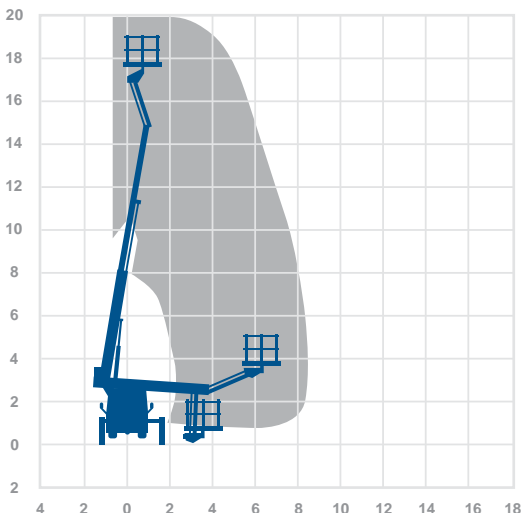

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.0m Outreach 11.0m (80kg)


Max Horiz. Outreach (full SWL)	8.6m
Max Reach Below 0m	2.0m
Overall Travel Length	7.65m
Overall Travel Height	3.0m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	250kg
Gross Vehicle Weight	3500kg
Operational Full Width	3.4m
Minimum Operational Width	2.5m
Point Load Front / Rear	30kN / 19kN

Alternative machines

T20C
T21JC

Manufacturer

Multitel

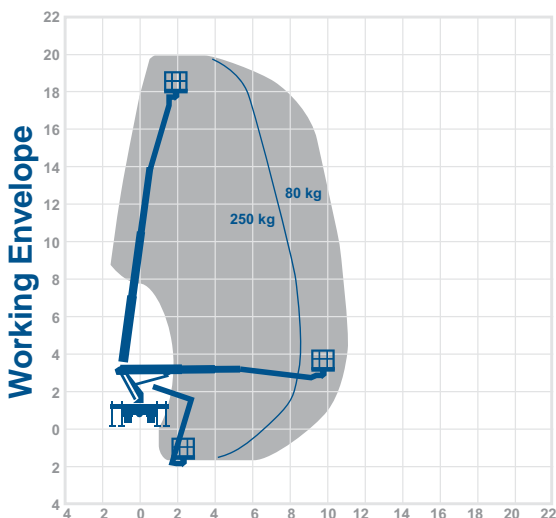

Working Height 21.0m Outreach 10.0m


Max Reach Below 0m	n/a
Overall Travel Length	6.8m
Overall Travel Height	2.6m
Overall Travel Width	2.1m
Platform Cage Size	1.4m x 0.7m
Max SWL	280kg
Gross Vehicle Weight	3500kg
Operational Full Width	2.9m
Minimum Operational Width	2.9m
Point Load Front / Rear	28kN / 28kN

Alternative machines

T20C
T20M

Manufacturer

CTE

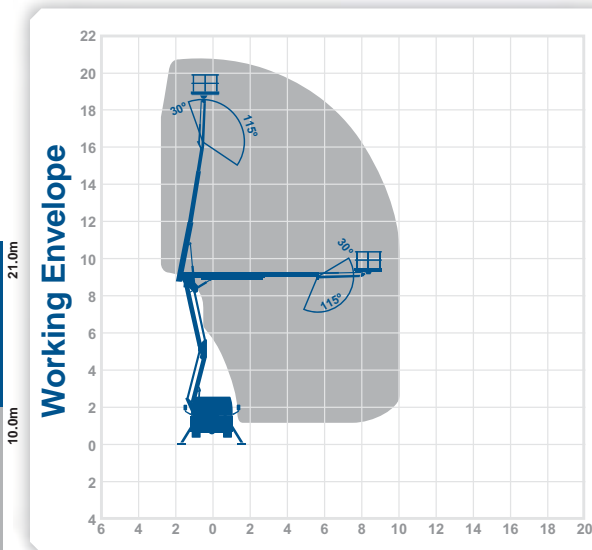

0345 745 0000

nationwideplatforms.co.uk

Working Height 22.0m Outreach 17.5m


Max Reach Below 0m	n/a
Overall Travel Length	9.2m
Overall Travel Height	3.5m
Overall Travel Width	2.4m
Platform Cage Size	1.8m x 1.1m
Max SWL*	280kg
Gross Vehicle Weight	7500kg
Operational Full Width	4.5m
Minimum Operational Width	2.5m
Point Load Front / Rear	60kN / 60kN

Alternative
machines

T22GS

Manufacturer

Ascendant

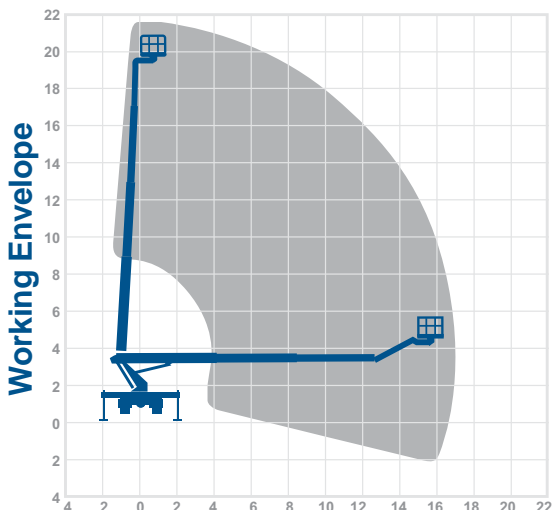

*Depending on load, angle of rotation and outrigger configuration.

Working Height 22.0m Outreach 17.7m

Max Reach Below 0m	n/a
Overall Travel Length	8.7m
Overall Travel Height	3.55m
Overall Travel Width	2.5m
Platform Cage Size	1.8m x 0.8m
Max SWL*	280kg
Gross Vehicle Weight	7500kg
Operational Full Width	4.5m
Minimum Operational Width	2.5m
Point Load Front / Rear	60kN / 60kN

Alternative
machines

T22AS


Manufacturer

GSR



22.0m
17.7m

Working Envelope

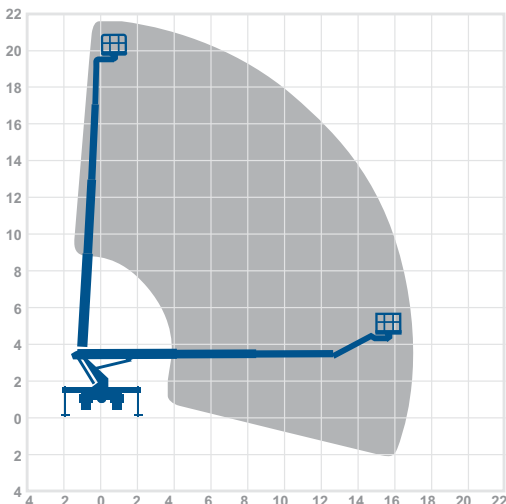

*Depending on load, angle of rotation and outrigger configuration.

0345 745 0000

nationwideplatforms.co.uk

Working Height 22.0m Outreach 17.7m


Max Reach Below 0m	n/a
Overall Travel Length	8.7m
Overall Travel Height	3.55m
Overall Travel Width	2.5m
Platform Cage Size	1.8m x 0.8m
Max SWL	280kg
Gross Vehicle Weight	8200kg
Operational Full Width	4.5m
Minimum Operational Width	2.5m
Point Load Front / Rear	60kN / 60kN

Alternative
machines

T22GS

Manufacturer

GSR

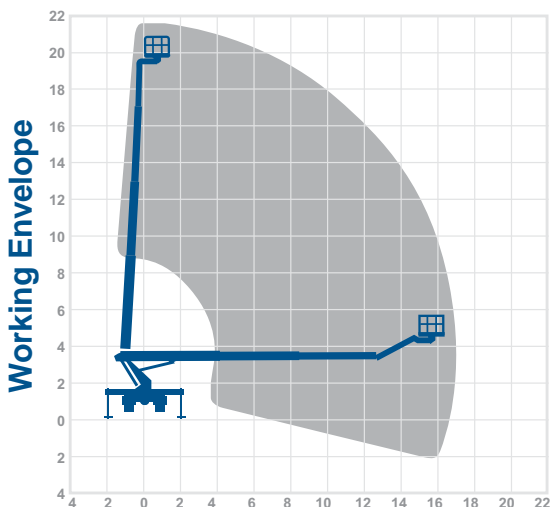

17.7m 22.0m

Working Height 26.0m Outreach 12.5m


Overall Travel Length	7.45m
Overall Travel Height	3.9m
Overall Travel Width	2.6m
Platform Cage Size	1.4m x 0.7m
Max SWL	230kg
Gross Vehicle Weight	14000kg
Operational Full Width	3.12m
Minimum Operational Width	3.12m
Point Load Front / Rear	140kN / 140kN

Alternative machines

T26WX
T26KX

Manufacturer

CTE

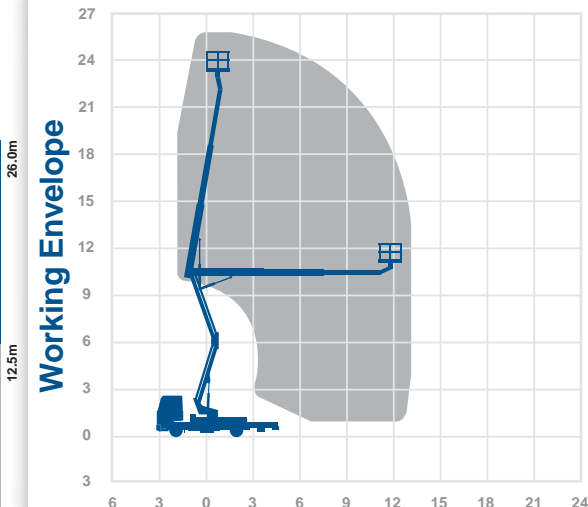

0345 745 0000

nationwideplatforms.co.uk

Working Height 26.0m Outreach 14.0m (280kg)


Max Horiz. Outreach (full SWL)	14.0m
Overall Travel Length	7.8m
Overall Travel Height	3.6m
Overall Travel Width	2.5m
Platform Cage Size	1.4m x 0.7m
Max SWL	280kg
Gross Vehicle Weight	7500kg
Operational Full Width	3.5m
Minimum Operational Width	3.5m
Point Load Front / Rear	60kN / 60kN

Alternative machines

T26C

Manufacturer

GSR

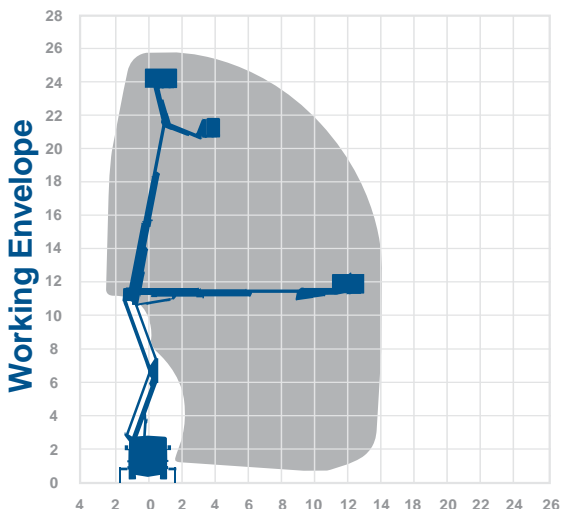

26.0m

14.0m

T27R

truck mounts

Working Height 27.0m Outreach** 21.0m (100kg)

Max Horiz. Outreach (full SWL)	16.0m
Max Reach Below 0m	n/a
Overall Travel Length	7.87m
Overall Travel Height	3.3m
Overall Travel Width	2.54m
Platform Cage Size	1.85m x 1.0m
Max SWL	320kg
Gross Vehicle Weight	7500kg
Operational Full Width	5.1m
Minimum Operational Width	2.5m
Point Load Front / Rear	72kN / 55kN

Alternative
machines


T26C

Manufacturer
Ruthman



27.0m
21.0m

Working Envelope

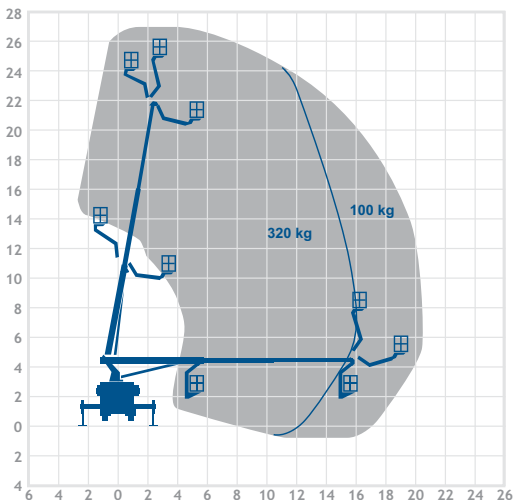

**Depending on load, angle of rotation and outrigger configuration.



The UK Contractors Group has mandated
IPAF PAL+ training for netters, steel erectors
and their associated trades.
Make sure your employees
are compliant.



Working Height **28.0m** Outreach** **21.3m** (100kg)


Max Horiz. Outreach (full SWL)	16.0m
Max Reach Below 0m	n/a
Overall Travel Length	8.12m
Overall Travel Height	3.8m
Overall Travel Width	2.5m
Platform Cage Size	1.7m x 0.86m
Max SWL	320kg
Gross Vehicle Weight	11000kg
Operational Full Width	3.8m
Minimum Operational Width	2.5m
Point Load Front / Rear	110kN / 50kN

Alternative
machines

T26CX

Manufacturer

Ruthman

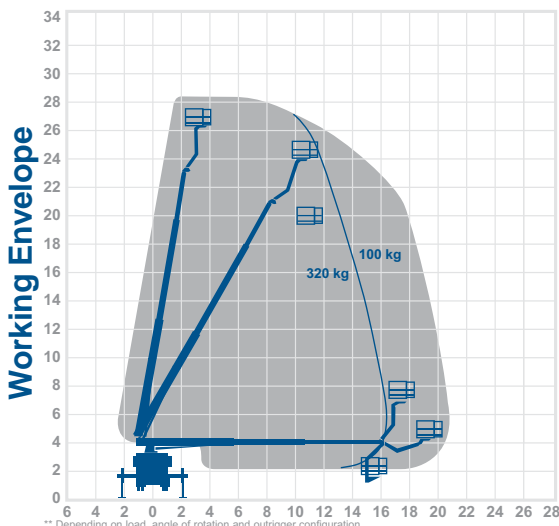

** Depending on load, angle of rotation and outrigger configuration.

 **Nationwide Platforms**

A **LOXAM** Company

Working Height **33.0m** Outreach** **21.2m** (100kg)


Max Horiz. Outreach (full SWL)	16.5m
Overall Travel Length	8.7m
Overall Travel Height	3.56m
Overall Travel Width	2.5m
Platform Cage Size	1.7m x 0.86m
Max SWL	320kg
Gross Vehicle Weight	7490kg
Operational Full Width	5.32m
Minimum Operational Width	2.53m
Point Load Front / Rear	56kN / 42kN

Alternative machines

T33RH

Manufacturer

Ruthman

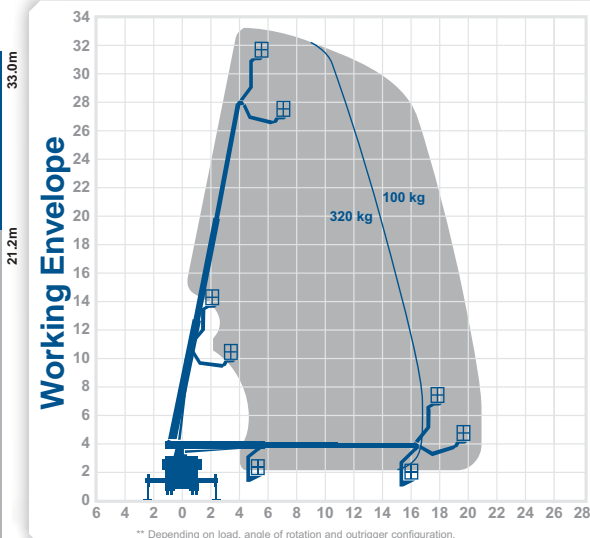

0345 745 0000

nationwideplatforms.co.uk

Working Height **33.0m**
Outreach** **21.2m** (100kg)


Max Horiz. Outreach (full SWL)	16.5m
Max Reach Below 0m	n/a
Overall Travel Length	8.7m
Overall Travel Height	3.56m
Overall Travel Width	2.5m
Platform Cage Size	1.7m x 0.86m
Max SWL	320kg
Gross Vehicle Weight	8600kg
Operational Full Width	5.32m
Minimum Operational Width	2.53m
Point Load Front / Rear	56kN / 42kN

Alternative machines

T37R
T38B

Manufacturer

Ruthman

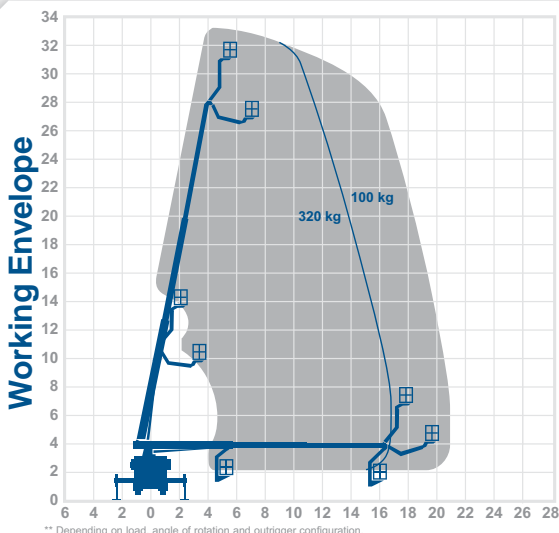

Working Height 37.0m Outreach** 26.0m (120kg)

Max Horiz. Outreach (full SWL)	21.0m
Max Reach Below 0m	6.5m
Overall Travel Length	10.0m
Overall Travel Height	3.6m
Overall Travel Width	2.5m
Platform Cage Size	2.3m x 1.05m
Max SWL	700kg
Gross Vehicle Weight	18000kg
Operational Full Width	6.2m
Minimum Operational Width	2.8m
Point Load Front / Rear	150kN / 150kN

Alternative
machines

T37R

Manufacturer


Bronto



37.0m

26.0m

Working Envelope

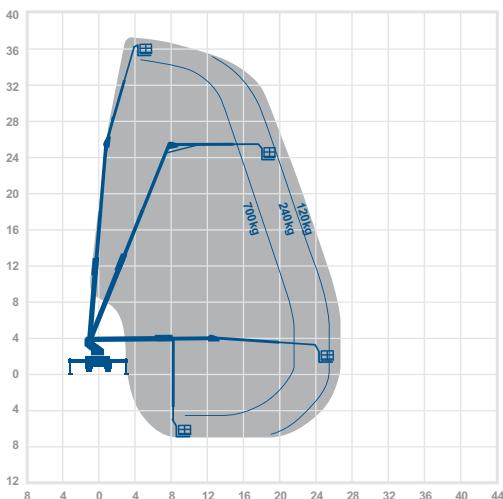

** Depending on load, angle of rotation and outrigger configuration.

0345 745 0000

nationwideplatforms.co.uk

Working Height **37.0m** Outreach** **30.0m** (100kg)

Max Horiz. Outreach (full SWL)	21.0m
Max Reach Below 0m	6.0m
Overall Travel Length	8.9m
Overall Travel Height	3.9m
Overall Travel Width	2.55m
Platform Cage Size (extended)	2.3(3.6)m x 0.9m
Max SWL	500kg
Gross Vehicle Weight	18000kg
Operational Full Width	6.4m
Minimum Operational Width	2.6m
Point Load Front / Rear	170kN / 140kN

Alternative
machines


T38B

Manufacturer

Ruthman



Working Envelope

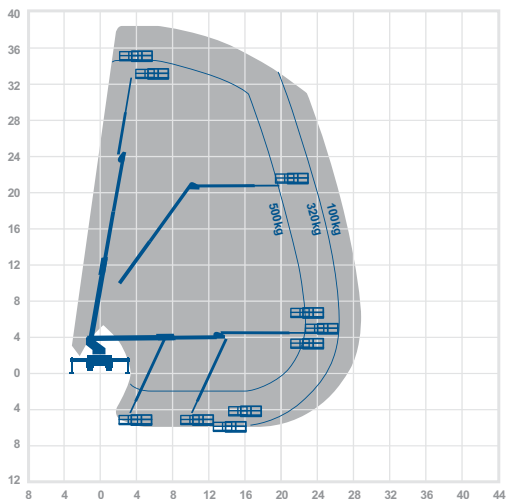

** Depending on load, angle of rotation and outrigger configuration.

 **Nationwide Platforms**

A **LOXAM** Company

Working Height **38.0m** Outreach** **25.3m** (120kg)

Max Horiz. Outreach (full SWL)	21.0m
Max Reach Below 0m	6.5m
Overall Travel Length	10.0m
Overall Travel Height	3.7m
Overall Travel Width	2.5m
Platform Cage Size (extended)	2.3(3.7)m x 1.05m
Max SWL	600kg
Gross Vehicle Weight	18000kg
Operational Full Width	6.2m
Minimum Operational Width	2.8m
Point Load Front / Rear	150kN / 150kN

Alternative machines

T37B
T37R

Manufacturer


Bronto



38.0m

25.3m

Working Envelope

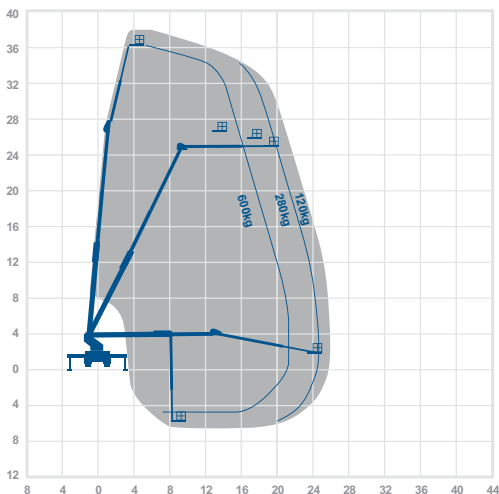

** Depending on load, angle of rotation and outrigger configuration.

0345 745 0000

nationwideplatforms.co.uk

Working Height 44.0m
Outreach** 24.0m (120kg)

Max Horiz. Outreach (full SWL)	21.0m
Max Reach Below 0m	5.0m
Overall Travel Length	10.0m
Overall Travel Height	3.8m
Overall Travel Width	2.5m
Platform Cage Size	2.4(3.7)m x 1.0m
Max SWL	600kg
Gross Vehicle Weight	18000kg
Operational Full Width	6.2m
Minimum Operational Width	2.8m
Point Load Front / Rear	150kn / 150kn

Alternative
machines


T46B

Manufacturer

Bronto



Working Envelope

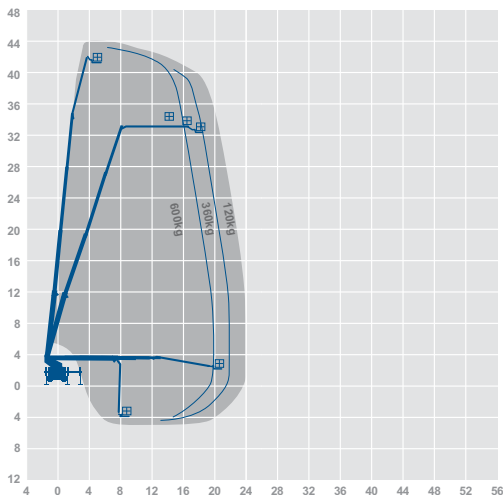

** Depending on load, angle of rotation and outrigger configuration.

Working Height 46.0m Outreach** 24.5m (120kg)

Max Horiz. Outreach (full SWL)	20.0m
Max Reach Below 0m	6.5m
Overall Travel Length	10.5m
Overall Travel Height	3.7m
Overall Travel Width	2.5m
Platform Cage Size	2.47m x 1.05m
Max SWL	600kg
Gross Vehicle Weight	18000kg
Operational Full Width	6.2m
Minimum Operational Width	2.8m
Point Load Front / Rear	150kN / 150kN

Alternative machines

T48P
T50JB

Manufacturer


Bronto

46.0m

24.5m



Working Envelope

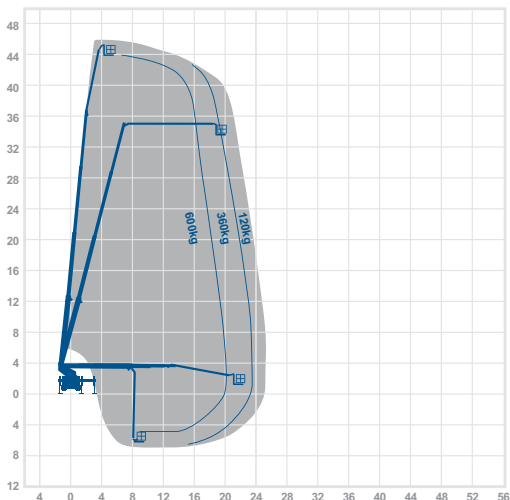

** Depending on load, angle of rotation and outrigger configuration.

0345 745 0000

nationwideplatforms.co.uk

Working Height 48.0m
Outreach** 28.0m (100kg)

Max Horiz. Outreach (full SWL)	22.0m
Max Reach Below 0m	13.5m
Overall Travel Length	10.4m
Overall Travel Height	4.0m
Overall Travel Width	2.55m
Platform Cage Size (extended)	2.15(3.8)m x 1.05m
Max SWL	600kg
Gross Vehicle Weight	17600kg
Operational Full Width	6.3m
Minimum Operational Width	2.55m
Point Load Front / Rear	160kN / 160kN

Alternative machines


T50JB

Manufacturer

Palfinger



Working Envelope

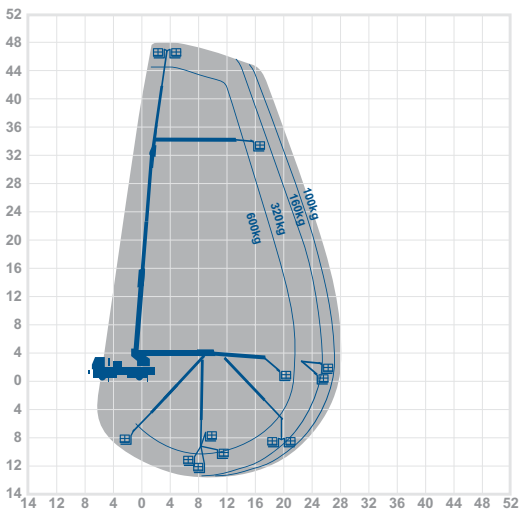

** Depending on load, angle of rotation and outrigger configuration.

Nationwide Platforms

A **LOXAM** Company

Working Height **49.5m** Outreach** **35.0m** (120kg)

Max Horiz. Outreach (full SWL)	25.0m
Max Reach Below 0m	11.0m
Overall Travel Length	12.0m
Overall Travel Height	4.0m
Overall Travel Width	2.5m
Platform Cage Size (extended)	2.2(3.7)m x 0.9m
Max SWL	600kg
Gross Vehicle Weight	26000kg
Operational Full Width	8.0m
Minimum Operational Width	2.8m
Point Load Front / Rear	190kN / 190kN

Alternative machines

T58B
T48P
T56B

Manufacturer


Bronto

49.5m

35.0m



Working Envelope

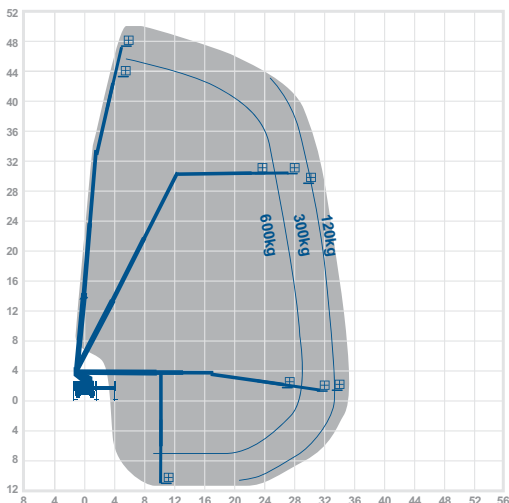

** Depending on load, angle of rotation and outrigger configuration.

0345 745 0000

nationwideplatforms.co.uk

Working Height 56.0m
Outreach** 37.3m (200kg)

Max Horiz. Outreach (full SWL)	32.0m
Max Reach Below 0m	9.0m
Overall Travel Length	11.9m
Overall Travel Height	3.7m
Overall Travel Width	2.5m
Platform Cage Size (extended)	2.4(3.7)m x 1.0m
Max SWL	600kg
Gross Vehicle Weight	26000kg
Operational Full Width	9.0m
Minimum Operational Width	3.0m
Point Load Front / Rear	180kN / 180kN

Alternative machines


T50JB

Manufacturer

Bronto



Working Envelope

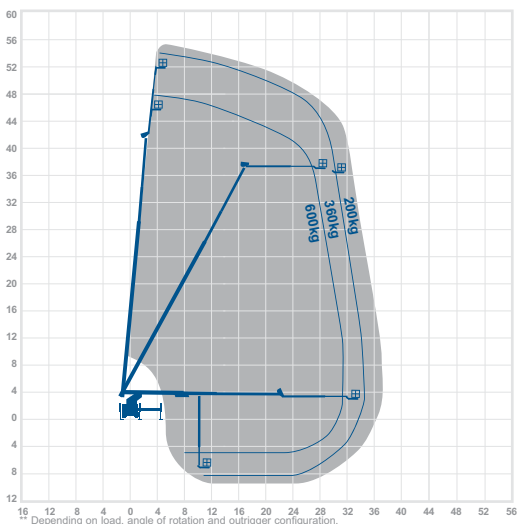

** Depending on load, angle of rotation and outrigger configuration.

Nationwide Platforms

A **LOXAM** Company

T58R

truck mounts

Working Height **58.0m** Outreach** **38.0m** (100kg)

Alternative machines

T70B
T66M-1
T56B


Manufacturer

Ruthman

Max Horiz. Outreach (full SWL)	31.0m
Max Reach Below 0m	6.0m
Overall Travel Length	11.7m
Overall Travel Height	3.99m
Overall Travel Width	2.55m
Platform Cage Size (extended)	2.3(3.6)m x 0.9m
Max SWL	500kg
Gross Vehicle Weight	26000kg
Operational Full Width	9.67m
Minimum Operational Width	2.85m
Point Load Front / Rear	220kN / 220kN



Working Envelope

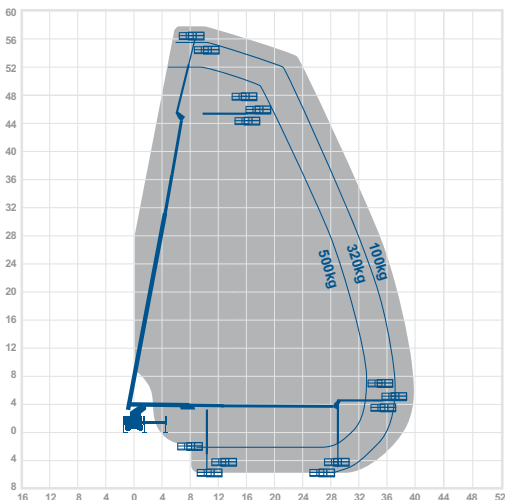

** Depending on load, angle of rotation and outrigger configuration.



Learn more about our truck mounted platforms by visiting the video gallery on our website.

Working Height 65.0m
Outreach** 33.0m (200kg)

Max Horiz. Outreach (full SWL)	30.0m
Max Reach Below 0m	16.0m
Overall Travel Length	12.7m
Overall Travel Height	4.2m
Overall Travel Width	2.5m
Platform Cage Size	2.3(3.6)m x 0.90m
Max SWL	400kg
Gross Vehicle Weight	41230kg
Operational Full Width	6.4m
Minimum Operational Width	3.0m
Point Load Front / Rear	170kN / 260kN

Alternative machines


T70B

Manufacturer

Multi-Tel



Working Envelope

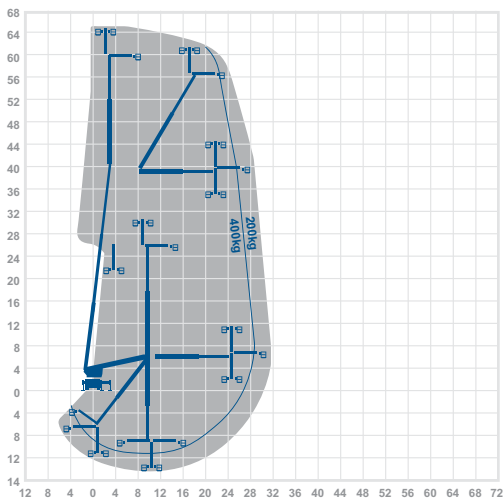

** Depending on load, angle of rotation and outrigger configuration.

70.0m

Working Height 70.0m Outreach 34.8m (120kg)

Max Horiz. Outreach (full SWL)	30.0m
Max Reach Below 0m	6.0m
Overall Travel Length	12.5m
Overall Travel Height	4.2m
Overall Travel Width	2.5m
Platform Cage Size (extended)	2.4(3.7)m x 1.0m
Max SWL	600kg
Gross Vehicle Weight	36000kg
Operational Full Width	8.0m
Minimum Operational Width	3.2m
Point Load Front / Rear	255kN / 255kN

Alternative
machines

T90B

Manufacturer

Bronto


Extra reach
version available

Cage winch
option available



34.8m

Working Envelope

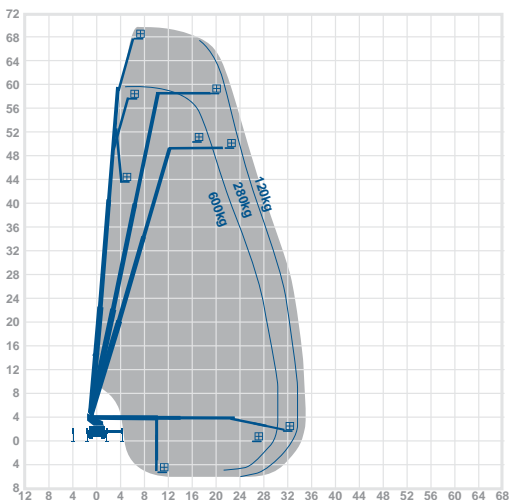

0345 745 0000

nationwideplatforms.co.uk

Working Height 90.0m Outreach** 31.0m (400kg)

Max Horiz. Outreach (full SWL)	29.0m
Max Reach Below 0m	12.0m
Overall Travel Length	15.6m
Overall Travel Height	4.0m
Overall Travel Width	2.5m
Platform Cage Size (extended)	2.4(3.7)m x 1.0m
Max SWL	600kg
Gross Vehicle Weight	48000kg
Operational Full Width	7.0m
Minimum Operational Width	n/a
Point Load Front / Rear	270kN / 270kN

Alternative
machines

T70B


Manufacturer

Bronto

Cage winch
option available



Working Envelope

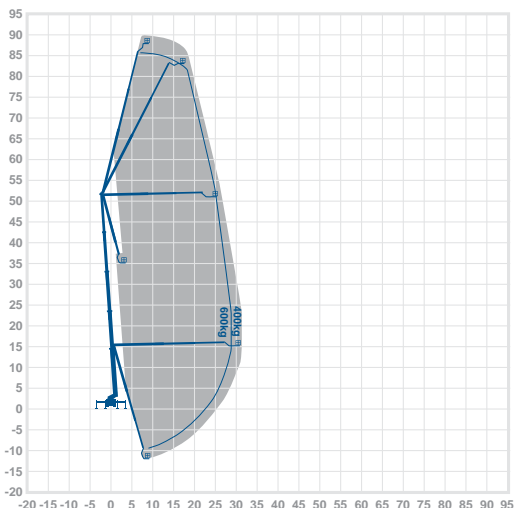

** Depending on load, angle of rotation and outrigger configuration.



0345 745 0000

nationwideplatforms.co.uk

Tracked Boom Lifts



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk

Tracked Boom Lifts

- More than 130 available to hire on either operated or self-operated basis
- Can be operated with IPAF 1b license
- Allows access to restricted areas that traditional booms can't
- Lithium battery options are available
- Reduces the ground bearing pressure on soft ground and delicate flooring
- Allows greater stability for work on uneven surfaces
- Easily transportable
- Can be used for a variety of applications including and retail
- Working heights up to 31m

in please call 45 0000



Working Height 14.0m
Horizontal Outreach 7.0m


Closed Length 4.06m
Closed Height 1.99m
Rails Up / Fixed Rails
Closed Width 0.78m
DeckSize 1.33m x 0.69m
Rotation 360°
SWL 200kg
Weight 1750kg
Outrigger Footprint 2.7m x 2.7m
Min Op Width 2.7m

Alternative machines

TB14HE
TB17HE
TB17HB

Manufacturer

Hinowa

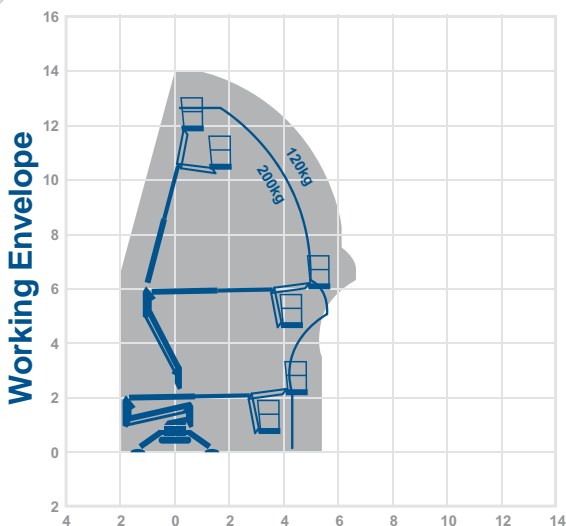



0345 745 0000

nationwideplatforms.co.uk

Working Height 14.0m
Horizontal Outreach 7.0m

Closed Length 4.06m
Closed Height 1.99m
Rails Up / Fixed Rails
Closed Width 0.78m
DeckSize 1.33m x 0.69m
Rotation 360°
SWL 200kg
Weight 1750kg
Outrigger Footprint 2.7m x 2.7m
Min Op Width 2.7m

Alternative machines


TB14HB
TB17HE
TB17HB

Manufacturer

Hinowa



Working Envelope

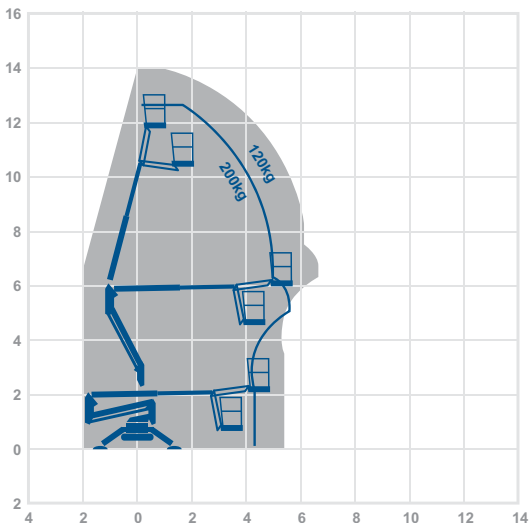

14.0m
7.0m

Working Height 15.4m Horizontal Outreach 6.6m


Closed Length	4.02m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.75m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	1950kg
Outrigger Footprint	2.8m x 2.8m
Min Op Width	2.8m

Alternative machines

TB15HE
TB17HE
TB17HB

Manufacturer

Hinowa

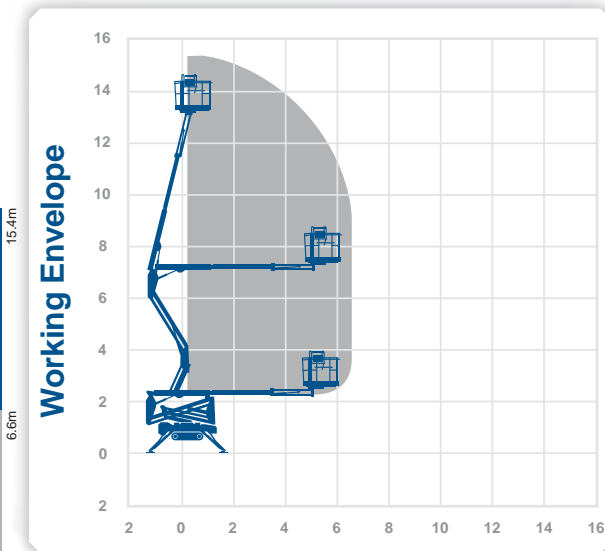

0345 745 0000

nationwideplatforms.co.uk

Working Height **15.4m** Horizontal Outreach **6.6m**

Closed Length	4.02m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.75m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	1950kg
Outrigger Footprint	2.8m x 2.8m
Min Op Width	2.8m

Alternative machines


TB15HB
TB17HE
TB17HB

Manufacturer

Hinowa



Working Envelope

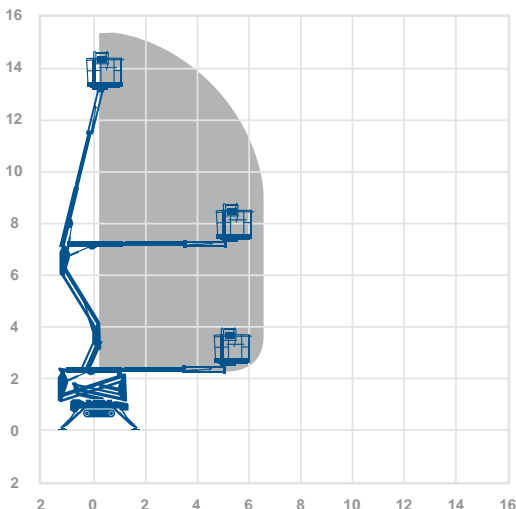

15.4m

6.6m

Working Height 17.06m Horizontal Outreach 7.5m


Closed Length	4.52m
Closed Height	2.0m
Rails Up / Fixed Rails	
Closed Width	0.79m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	2280kg
Outrigger Footprint	2.88m x 2.89m
Min Op Width	2.88m

Alternative machines

TB17HE
TB20HE
TB20HB

Manufacturer

Hinowa

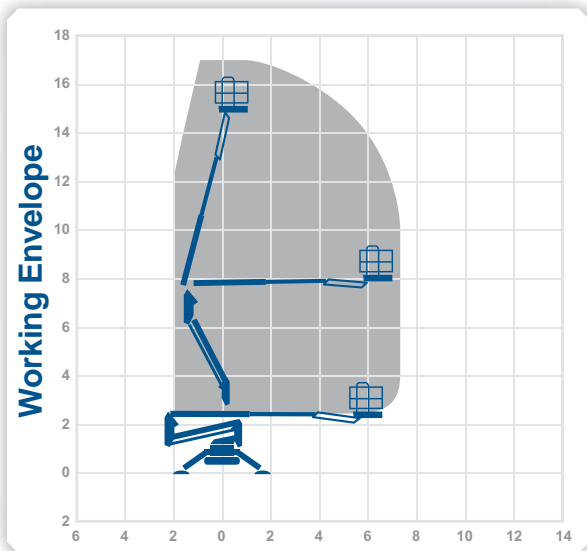

0345 745 0000

nationwideplatforms.co.uk

Working Height 17.06m
Horizontal Outreach 7.5m

Closed Length 4.52m
Closed Height 2.0m
Rails Up / Fixed Rails
Closed Width 0.79m
DeckSize 1.33m x 0.69m
Rotation 360°
SWL 230kg
Weight 2280kg
Outrigger Footprint 2.88m x 2.89m
Min Op Width 2.88m

Alternative machines


TB17HB
TB20HE
TB20HB

Manufacturer

Hinowa



Working Envelope

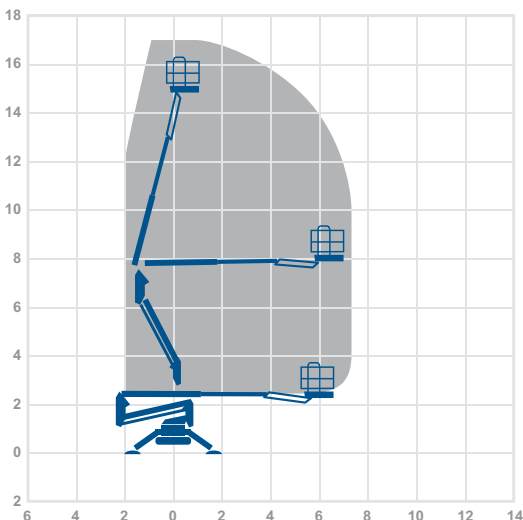

17.06m

7.5m

Working Height 17.6m Horizontal Outreach 9.2m


Closed Length	5.21m
Closed Height	1.95m
Rails Up / Fixed Rails	
Closed Width	0.78m
DeckSize	1.3m x 0.7m
Rotation	360°
SWL	200kg
Weight	2350kg
Outrigger Footprint	3.1m x 3.1m
Min Op Width	3.1m

Alternative machines

TB17HE
TB20HE
TB20HB

Manufacturer

Hinowa

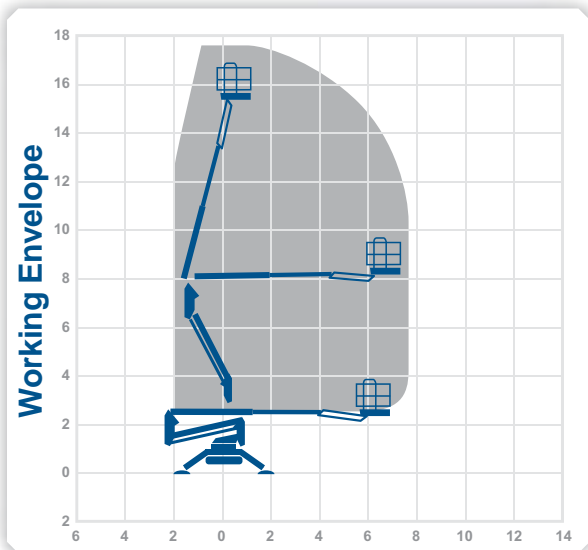

0345 745 0000

nationwideplatforms.co.uk



 **Nationwide Platforms**
A **LOXAM** Company

Working Height 20.1m Horizontal Outreach 9.7m


Closed Length	5.01m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.79m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	2880kg
Outrigger Footprint	2.92m x 2.92m
Min Op Width	2.92m

Alternative machines

TB26HE
TB26HB
TB20HE

Manufacturer

Hinowa

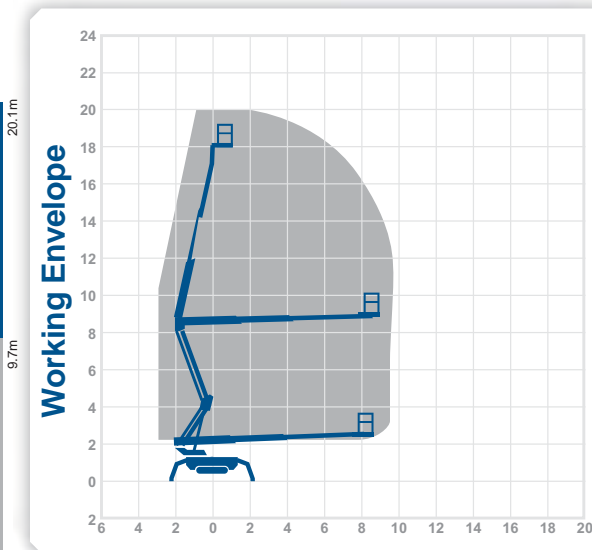

0345 745 0000

nationwideplatforms.co.uk

Working Height 20.1m
Horizontal Outreach 9.7m


Closed Length 5.01m
Closed Height 1.99m
Rails Up / Fixed Rails
Closed Width 0.79m
DeckSize 1.33m x 0.69m
Rotation 360°
SWL 230kg
Weight 2880kg
Outrigger Footprint 2.92m x 2.92m
Min Op Width 2.92m

Alternative machines

TB26HE
TB26HB
TB17HB
TB20HB

Manufacturer

Hinowa

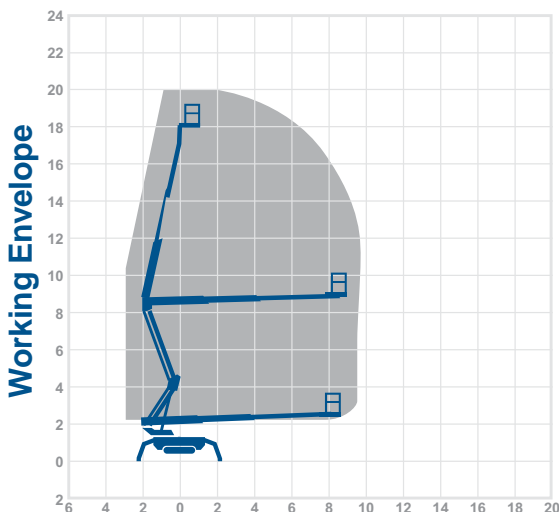

20.1m
9.7m

Working Height 25.7m Horizontal Outreach 13.6m

Closed Length	6.34m
Closed Height	1.98m
Rails Up / Fixed Rails	
Closed Width	0.99m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	4415kg
Outrigger Footprint	4.07m x 3.97m
Min Op Width	3.97m

Alternative machines

TB26HE

Manufacturer

Hinowa

Dual




A

T



IPAF
1b

Working Envelope

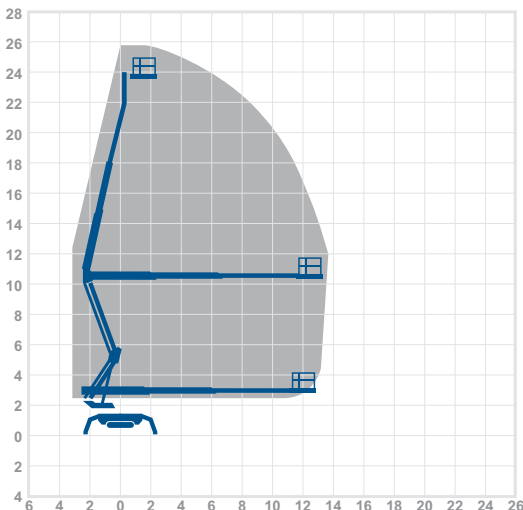

0345 745 0000

nationwideplatforms.co.uk

Working Height 25.7m

Horizontal Outreach 13.6m

Closed Length	6.34m
Closed Height	1.98m
Rails Up / Fixed Rails	
Closed Width	0.99m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	4415kg
Outrigger Footprint	4.07m x 3.97m
Min Op Width	3.97m

Alternative machines


TB26HB

Manufacturer

Hinowa



Working Envelope

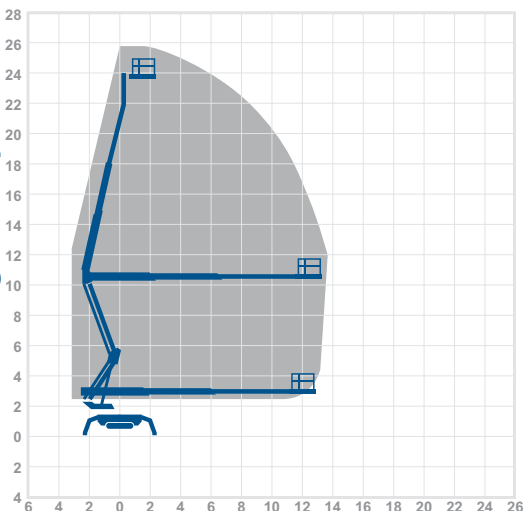

25.7m

13.6m

Nationwide Platforms

A **LOXAM** Company

Working Height 30m Horizontal Outreach 14m


Closed Length	6.65m
Closed Height	2.3m
Closed Width	1.6m
Platform Size (extended)	0.70m x 1.60m (4.2m)
Rotation	400°
Max SWL	270kg
Weight	5600kg
Min Op Width	3.3m

Alternative
machines

TB31TB

Manufacturer

Multitel

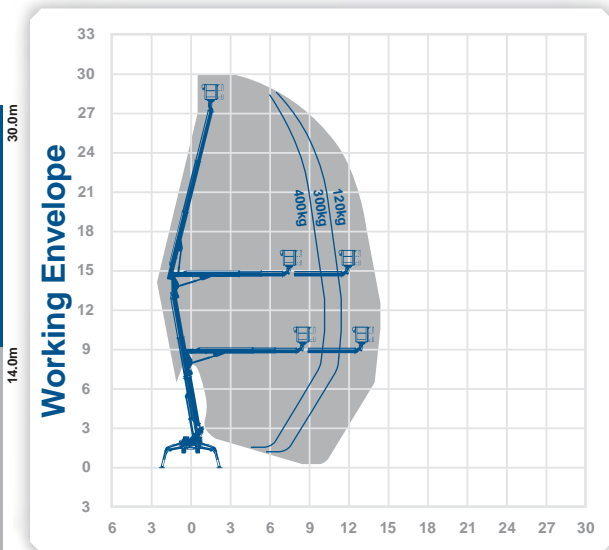

0345 745 0000

nationwideplatforms.co.uk

Working Height 31.0m
Horizontal Outreach 14.7m


Closed Length 7.23m
Closed Height 1.98m
Rails Up / Fixed Rails
Closed Width 1.58m
DeckSize 1.20m x 0.80m
Rotation 360°
SWL 250kg
Weight 4350kg
Outrigger Footprint 5.45m x 5.15m
Min Op Width 2.75m

Alternative machines

TB26HB
TB26HE

Manufacturer

Teupen

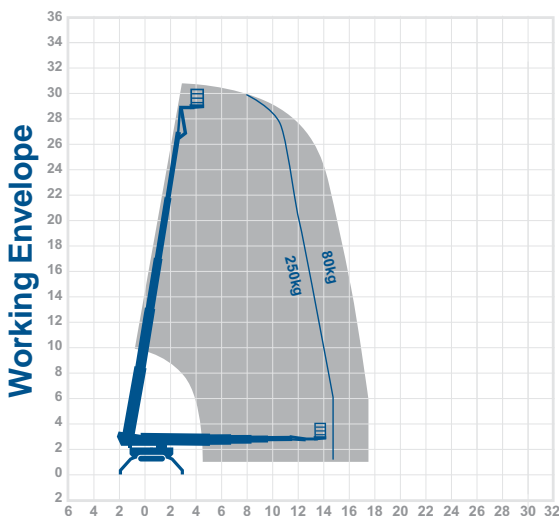



0345 745 0000

nationwideplatforms.co.uk

Telehandlers



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk 225

Telehandlers

- Access to the UK's largest fleet of telehandlers
- Full range from compact 4m machines to 30m rotational telehandlers
- Rough terrain forklift
- Ideal for lifting heavy materials to height

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**




Max Lift Height 4.0m
Max Forward Reach 2.59m

Manufacturer
 JCB

Overall Length 2.92m
 Overall Height 1.97m
 Overall Width 1.56m
 Max Capacity 2000kg
 Max Lift Capacity (full reach) 1000kg
 Weight 4400kg
 Outside Turn Radius 3.05m



RT⁴

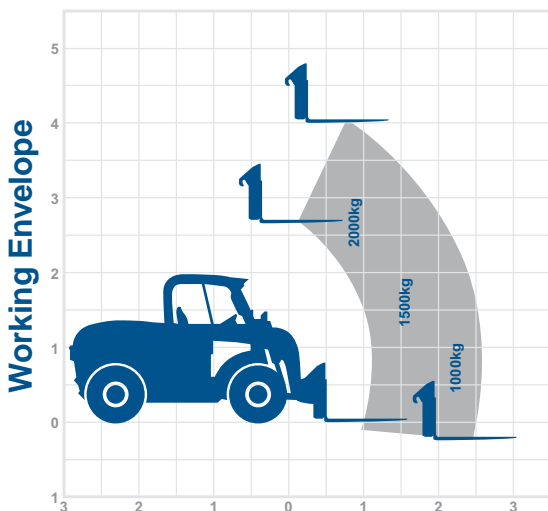

2.59m 4.0m

Max Lift Height 5.0m
Max Forward Reach 2.82m


Manufacturer
 JCB

Overall Length 3.08m
 Overall Height 2.12m
 Overall Width 1.84m
 Max Capacity 2000kg
 Max Lift Capacity (full reach) 750kg
 Weight 4870kg
 Outside Turn Radius 3.1m



RT⁴

Working Envelope

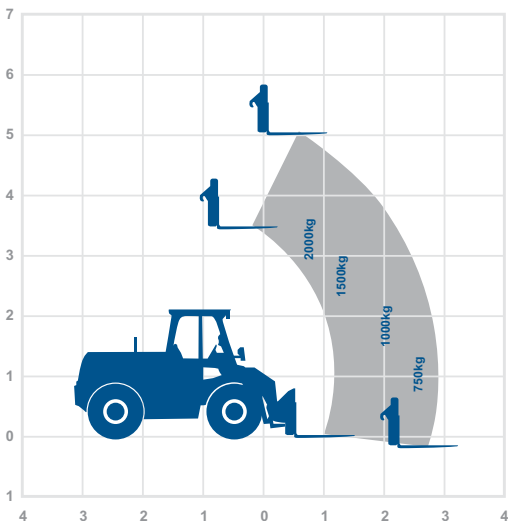

0345 745 0000

nationwideplatforms.co.uk


Max Lift Height **6.0m**
Max Forward Reach **3.06m**

Manufacturer
JCB

Overall Length 3.38m
 Overall Height 1.89m
 Overall Width 1.84m
 Max Capacity 2500kg
 Max Lift Capacity (full reach) 1750kg
 Weight 5490kg
 Outside Turn Radius 3.71m



RT⁴

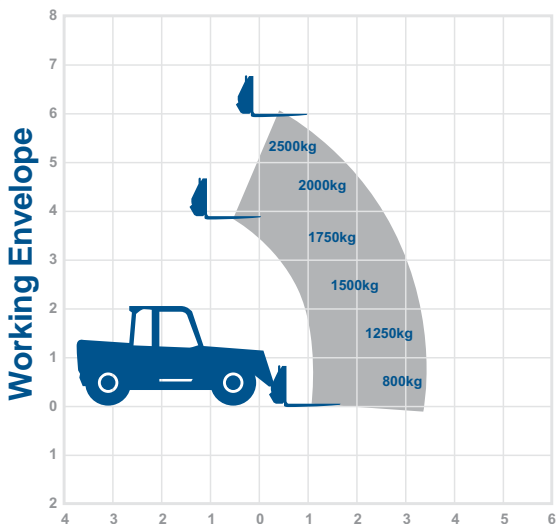

Max Lift Height 7.0m
Max Forward Reach 3.7m


Manufacturer
JCB

Overall Length	4.38m
Overall Height	2.49m
Overall Width	2.23m
Max Capacity	3500kg
Max Lift Capacity (full reach)	2400kg
Weight	7060kg
Outside Turn Radius	3.7m



RT⁴

Working Envelope

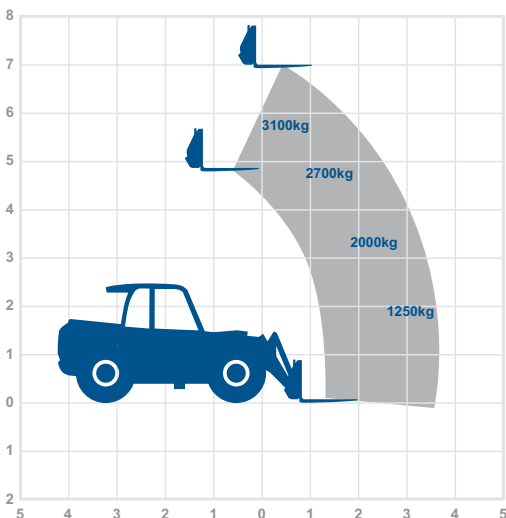

0345 745 0000

nationwideplatforms.co.uk

Max Lift Height **7.0m**
Max Forward Reach **3.7m**


Manufacturer
JCB

Overall Length 4.99m
 Overall Height 2.49m
 Overall Width 2.23m
 Max Capacity 3000kg
 Max Lift Capacity (full reach) 1250kg
 Weight 6900kg
 Outside Turn Radius 3.7m



RT⁴

Working Envelope

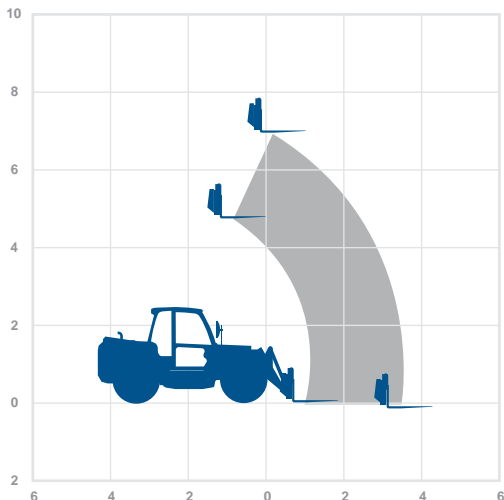

7.0m
3.7m

Max Lift Height 7.67m

Max Forward Reach N/A

Manufacturer

JCB

Overall Length 3.6m

Overall Height 2.57m

Overall Width 2.2m

Max Capacity 3000kg

Max Lift Capacity (full reach) 2600kg

Weight 5910kg


Outside Turn Radius 4.49m



RT⁴

7.67m

Working Envelope

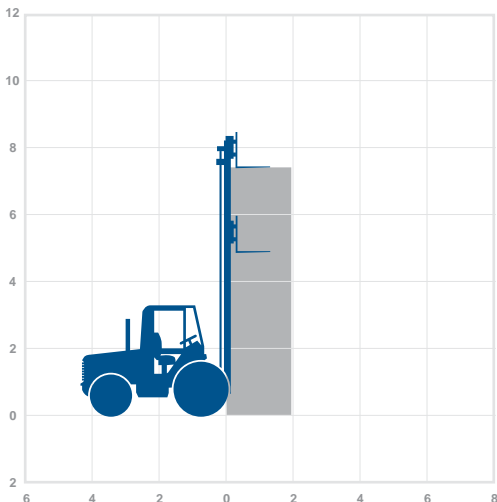

0345 745 0000

nationwideplatforms.co.uk


Max Lift Height 10.2m
Max Forward Reach 6.83m

Manufacturer
JCB

Overall Length 4.38m
Overall Height 2.49m
Overall Width 2.29m
Max Capacity 3300kg
Max Lift Capacity (full reach) 1000kg
Weight 8850kg
Outside Turn Radius 3.7m



RT⁴

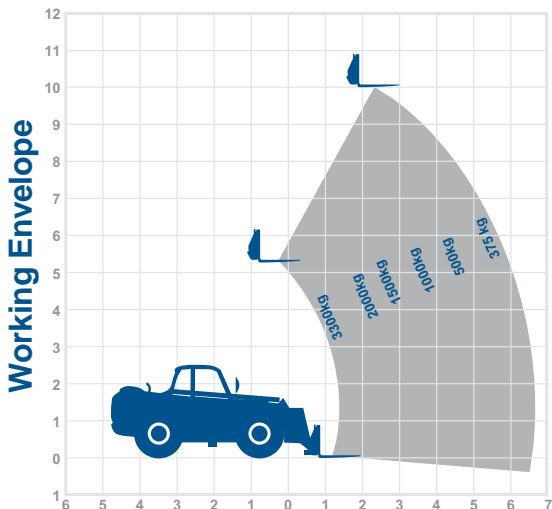

Max Lift Height 12.28m

Max Forward Reach 8.1m

Manufacturer
JCB


Overall Length	5.8m
Overall Height	2.59m
Overall Width	2.35m
Max Capacity	3500kg
Max Lift Capacity (full reach)	1150kg
Weight	10066kg
Outside Turn Radius	3.75m



RT⁴

12.28m
8.1m

Working Envelope

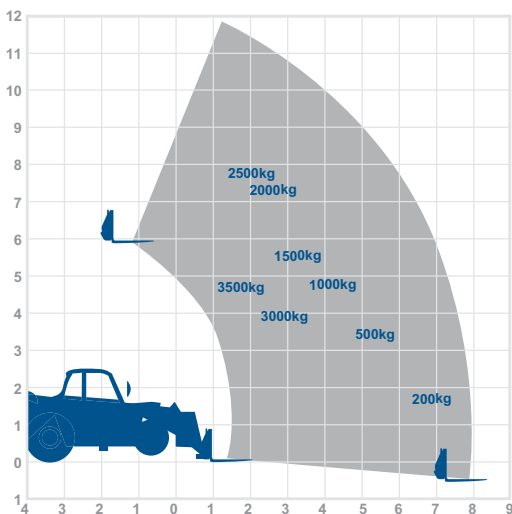

0345 745 0000

nationwideplatforms.co.uk

Max Lift Height 13.6m
Max Forward Reach 9.8m


Manufacturer
Haulotte

Overall Length 6.46m
Overall Height 2.6m
Overall Width 2.43m
Max Capacity 4000kg
Max Lift Capacity (full reach) 1000kg
Weight 10710g
Outside Turn Radius 4.5m



RT⁴

Working Envelope

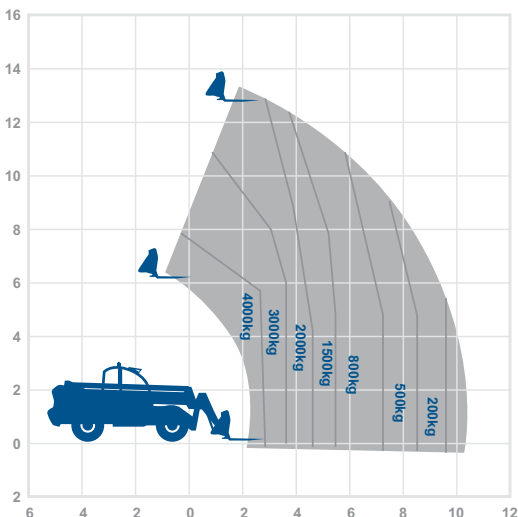

Nationwide Platforms
A **LOXAM** Company

Max Lift Height 13.78m

Max Forward Reach 9.7m

Manufacturer
JCB

Overall Length 6.23m

Overall Height 2.59m

Overall Width 2.35m

Max Capacity 3500kg

Max Lift Capacity
(full reach) 1250kg

Weight 11090kg


Outside Turn Radius 4.1m



RT⁴

13.78m
9.7m

Working Envelope

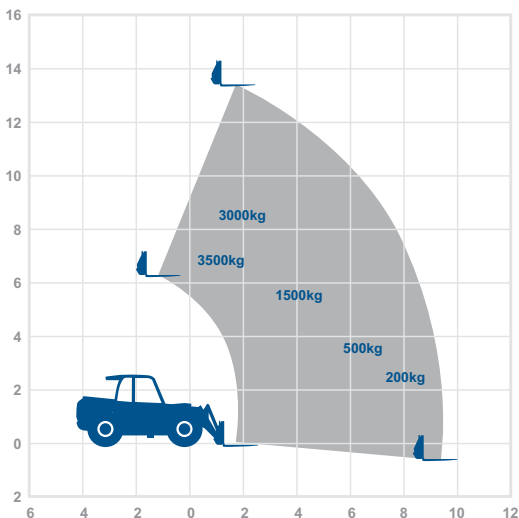

0345 745 0000

nationwideplatforms.co.uk


Max Lift Height 16.7m
Max Forward Reach 12.9m

Manufacturer
Haulotte

Overall Length 6.65m
Overall Height 2.6m
Overall Width 2.43m
Max Capacity 4000kg
Max Lift Capacity (full reach) 700kg
Weight 12000kg
Outside Turn Radius 4.5m



RT⁴

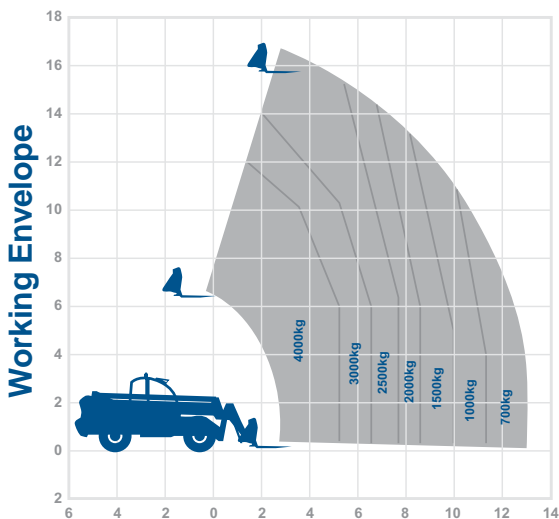

Max Lift Height 16.7m
Max Forward Reach 12.5m

Manufacturer
 JCB


Overall Length 6.36m
 Overall Height 2.69m
 Overall Width 2.44m
 Max Capacity 4000kg
 Max Lift Capacity (full reach) 2500kg
 Weight 12060kg
 Outside Turn Radius 4.1m



RT⁴

16.7m
 12.5m

Working Envelope

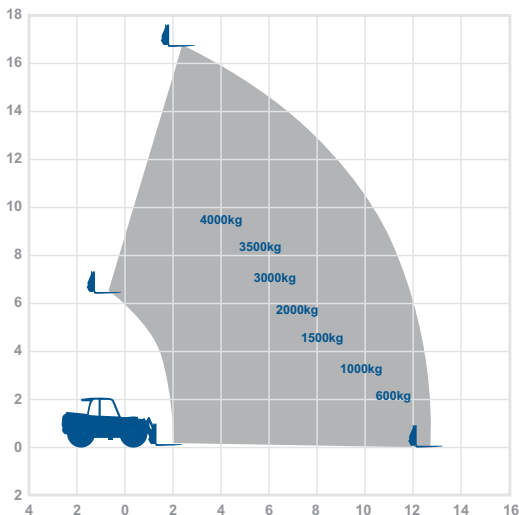

0345 745 0000

nationwideplatforms.co.uk

Max Lift Height 20.0m
Max Forward Reach 15.9m


Manufacturer
 JCB

Overall Length 6.81m
 Overall Height 2.72m
 Overall Width 2.44m
 Max Capacity 4000kg
 Max Lift Capacity (full reach) 200kg
 Weight 12985kg
 Outside Turn Radius 4.1m



RT⁴

Working Envelope

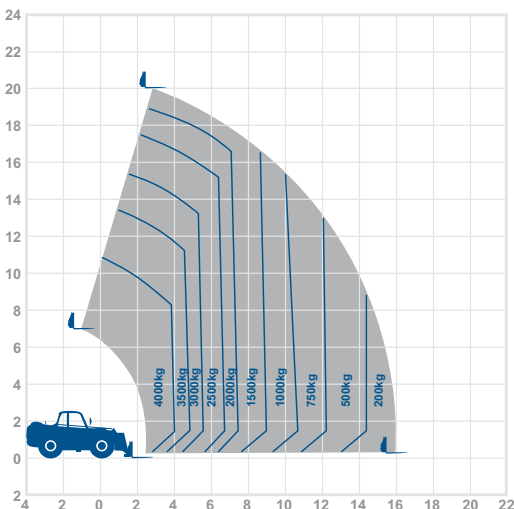

20.0m

15.9m

Max Lift Height 20.6m
Max Forward Reach 18.1m

Manufacturer
 Manitou

Overall Length 6.78m
 Overall Height 3.05m
 Overall Width 2.43m
 Max Capacity 4999kg
 Max Lift Capacity (full reach) 600kg
 Weight 16095kg
 Outside Turn Radius 4.04m


20.6m

18.0m



RT⁴

Working Envelope

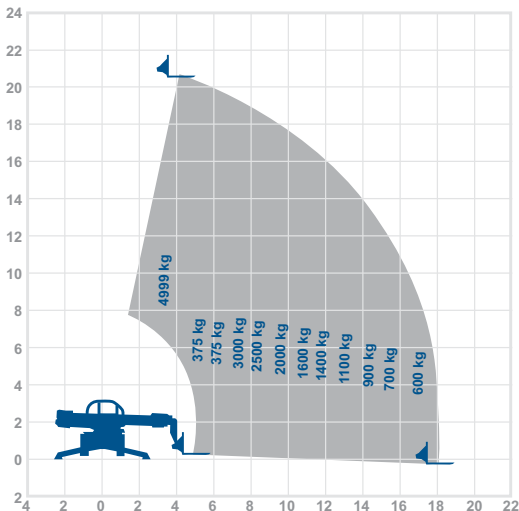

0345 745 0000

nationwideplatforms.co.uk

Max Lift Height 23.9m
Max Forward Reach 20.8m


Overall Length 7.43m
 Overall Height 3.1m
 Overall Width 2.49m
 Max Capacity 6000kg
 Max Lift Capacity (full reach) 850kg
 Weight 18750kg
 Outside Turn Radius 6.5m

Manufacturer
 Merlo



RT⁴

Working Envelope

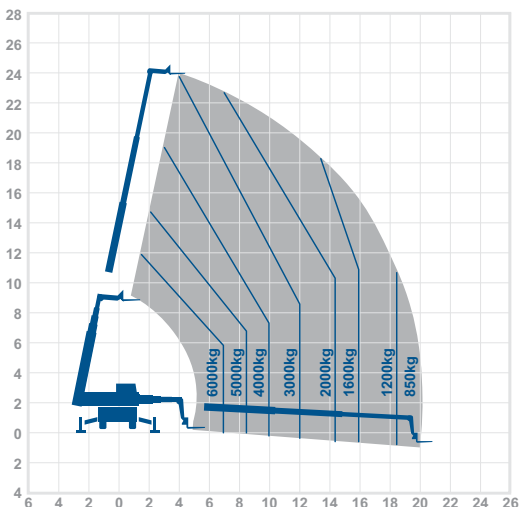

Max Lift Height 24.6m
Max Forward Reach 18.5m

Manufacturer
 Manitou

Overall Length 7.82m
 Overall Height 3.05m
 Overall Width 2.43m
 Max Capacity 4000kg
 Max Lift Capacity (full reach) 400kg
 Weight 17165kg
 Outside Turn Radius 4.04m


24.6m

18.5m



RT⁴

Working Envelope

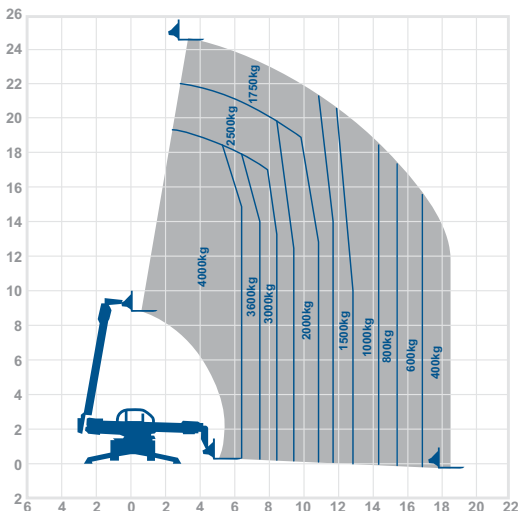

0345 745 0000

nationwideplatforms.co.uk

Max Lift Height 26.0m
Max Forward Reach 22.9m


Overall Length 6.98m
Overall Height 2.95m
Overall Width 2.4m
Max Capacity 4000kg
Max Lift Capacity (full reach) 150kg
Weight 16050kg
Outside Turn Radius 6.85m

Manufacturer
Merlo



RT⁴

Working Envelope

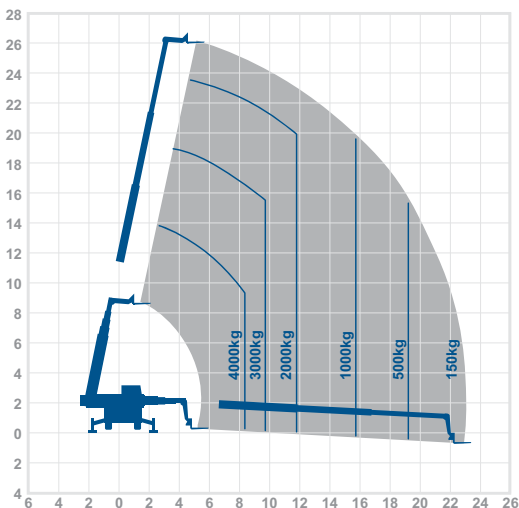

Max Lift Height 29.5m
Max Forward Reach 25.5m

Manufacturer
 Merlo

Overall Length 7.56m
 Overall Height 3.1m
 Overall Width 2.49m
 Max Capacity 4000kg
 Max Lift Capacity (full reach) 400kg
 Weight 19200kg
 Outside Turn Radius 6.7m


29.5m

25.5m



RT⁴

Working Envelope

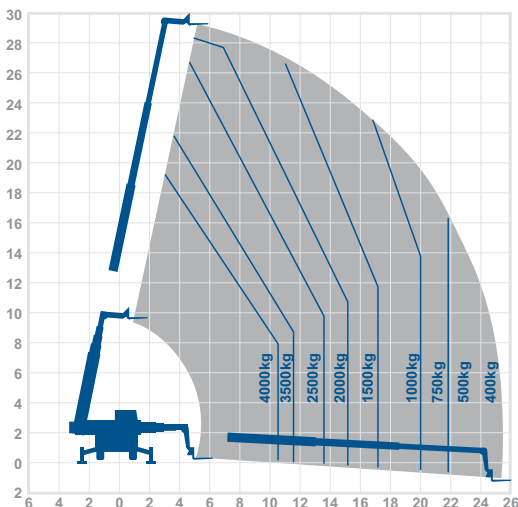

0345 745 0000

nationwideplatforms.co.uk

Safety Solutions, Attachments & Accessories



Call our hire team for expert advice and assistance

0345 745 0000

nationwideplatforms.co.uk 245

Safety Solutions, Attachments & Accessories

Safety and Productivity Innovation

Available exclusively through Nationwide Platforms, our BlueSky innovations can help bring new levels of productivity and safety to your project.

- Available to hire and pre-fitted with all applicable Nationwide Platforms equipment
- Enables users to conform to contractor specific mandates surrounding key safety issues
- Material handling solutions designed to boost efficiencies and convenience whilst tackling risks associated with manual handling

For more information please call **0345 745 0000**
or visit **nationwideplatforms.co.uk**



Nationwide Platforms' Secondary Guarding solution is the pioneering SkySiren®; designed to reduce the risks associated with entrapment. Not only does it stop the MEWP when an entrapment situation is detected, to prevent further crushing, it also has a flashing light and emergency klaxon to attract the attention of colleagues on the ground to enact the emergency lowering procedure without delay.



The unique pressure sensitive system, acts as an 'emergency switch' in an entrapment situation. It is designed to react to the body pressure of an operator trapped against the boom lift's control panel.

The SkySiren® is a CE Certified retro-fit system capable of being fitted to most boom-type MEWPs.



Look for the SkySiren® icon to identify which machines can benefit from this unique attachment.

Learn more about our award-winning SkySiren® by visiting the video gallery on our website.



In addition to the pioneering SkySiren® Nationwide Platforms have introduced the next level in safe operating at height with SkySiren®PCS™. Working in concert with SkySiren®, the SkySiren®PCS™ attachment uses proximity sensing technology to help avoid entrapment situation occurring.



The continuous operation of proximity sensors built into the SkySiren®PCS™ provides a sensing 'zone of protection', alerting the operator to potential hazards before they occur. The system has been designated as Intelligent Secondary Guarding.

The award winning design provides maximum protection, while at the same time not impeding either the MEWP's functionality nor the operators ability to carry out tasks. The SkySiren®PCS™ is CE Certified retro fit system capable of being fitted to most boom and scissor type MEWPs.



Look for the SkySiren®PCS™ icon to identify which machines can benefit from this unique attachment.



Scan QR code with your phone app
to see the SkySiren®PCS™ in action

SkySentry™ is a simple and effective fleet management system designed to help you reduce costs, drive efficiency and improve safety.



SkySentry™ is a full service system designed to improve the management of your powered access fleet across multiple sites and safeguard against unauthorised use.

The system offers unrivalled access and visibility of not only who is operating a machine at any one time. But also if they are correctly trained and authorised to do so.



Look for the SkySentry icon to identify which machines can benefit from this feature.

Scan QR code with your phone app
to see the SkySentry™ in action.



Fits most small electric scissor lifts to enable the fast and safe installation of materials up to 150kg (300kg if fitted as double and MEWP capacity allows). Materials are securely fastened using the straps provided.



The unique design of the SkyRak® means the load weight is transferred to the platform floor, avoiding materials being rested on the non-load bearing hand-rails.

SkyRak® fits most small electric scissor lifts to enable the fast and safe installation of materials at height.




Look for the SkyRak® icon to identify which machines can benefit from this unique attachment.



Scan QR code with your phone app to see the SkyRak® in action

SkyRakPlus® allows materials up to 600kg to be safely stored on most large decked diesel scissor lifts, with no weight put on the MEWP handrail.

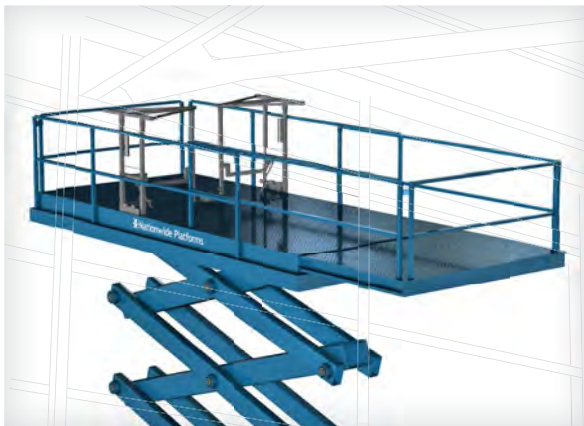

A system of flexible heads support a wide variety of materials of many shapes and sizes including pipes, ducting, cladding, steelwork and bus bars.

When the MEWP is in motion, the materials are secured by use of moveable pins and straps.




Look for the SkyRakPlus® icon to identify which machines can benefit from this unique attachment.

Scan QR code with your phone app
to see the SkyRakPlus® in action.



SkyRakBoom® allows the safe storage of materials up to 90kg in weight. Materials are stored with no weight on the MEWP's handrails.

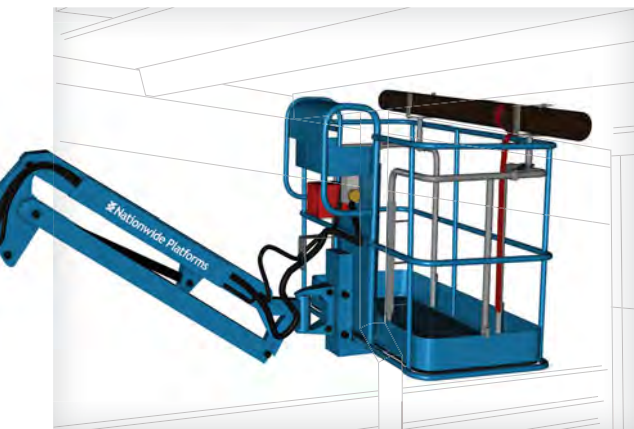

Whilst the boom is in operation, materials are safely secured using the straps provided which significantly reduces the risk of materials falling to the ground.

SkyRakBoom® is suitable for installation to all standard Genie 6ft and 8ft 'boom-type' baskets.



Look for the SkyRakBoom® icon to identify which machines can benefit from this unique attachment.



Scan QR code with your phone app
to see the SkyRakBoom® in action

Available on the majority of our boom lifts, SkyScreen™ reduces the risk of items falling from the platform basket while also offering added protection to personnel and machines on the ground.



Velcro and magnetised fittings allow operators to assemble and remove quickly and efficiently and its design allows all normal cage operations to be unaffected. Additional features include being fire retardant and wind resistant up to 6m/s.




Look for the SkyScreen™ icon to identify which machines can benefit from this unique attachment.

Scan QR code with your phone app
to see the SkyScreen™ in action.



SkyRakEdge™ is a lightweight material handling attachment designed to safely and securely handle scaffold tubes or lattice and ladder edge protection beams on boom type Mobile Elevated Work Platforms (MEWPs).

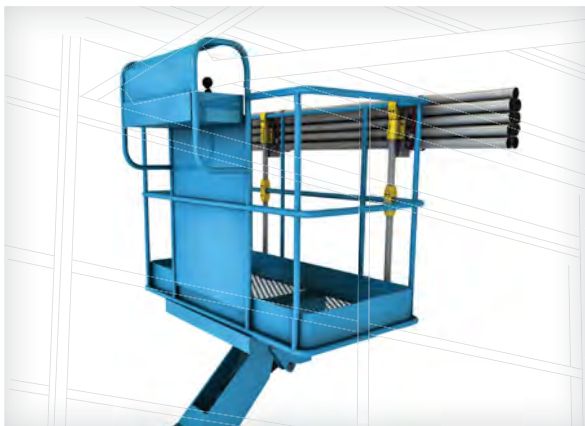

SkyRakEdge™ securely holds up to 9 x scaffold tube 6m length, or 2 x 6m lattice beams, or 1 x 8m lattice beam*

It reduces the risk of materials falling from height and removes excess tube weight on the handrails

* Subject to maximum payload



Look for the SkyRakEdge™ icon to identify which machines can benefit from this unique attachment.

0345 745 0000

nationwideplatforms.co.uk

SkyTel from Nationwide Platforms is the latest innovation in safety and efficiency, reducing the need for the manual handling of antennas in the telecoms sector.



Provides a consistent, safe method of work for the installation and removal of antennas. Easily installed and removed in minutes.



Look for the SkyTel icon to identify which machines can benefit from this unique attachment.

SkyRakTether, the lightweight tested tethering post for Mobile Elevating Work Platforms utilises a bespoke tethering bag providing safe storage for all tethered tools allowing operators to work freely at height and reducing the risk associated with items falling from height.



- Reduces the risk of tools falling from height
- Safe tool storage when not in use
- Improves productivity
- Complies with many Tier One company's tethering policies
- Complies with HSE guidance

Compatible with a wide range of booms and scissors type MEWPs.

0345 745 0000

nationwideplatforms.co.uk

Accessories

Key Pads

Key pads can be fitted to machines to minimise theft, unauthorised use of the machine and downtime caused by unscheduled equipment use. The key pads are programmable and weatherproof. Simply request a key pad when you place your order.

Pre-use Inspection Cards

Are your operators complying with the law each time they use powered access machines?

Regulations state that pre-use checks must be made before any operator uses an access platform, with users also required to make a record.

Our daily inspection cards have been designed to help powered access users conform to the law by acting as a comprehensive checklist and record of machine use.

Daily inspection sheets are now available to order with all hires.

Daily Machine Inspections

All of our powered access platforms are subject to extensive safety maintenance checks before they reach you. For extra peace of mind when machines are on your site for longer periods of work, we can also organise daily inspections by a qualified engineer from your local depot.

Please call today and ask for details on our pre-use inspection cards.

Harness and Lanyards

IPAF strongly recommends that a full body harness with an adjustable lanyard (used to provide work restraint and adjusted to be as short as possible) is used when working from a boom type MEWP or vehicle mounted boom.

For more information from IPAF and details of their 'Clunk Click' harness campaign visit www.ipaf.org.

Harness and lanyards sets are available to purchase at the time of hire.

Wheel Covers and Nappies

Most electric machines are fitted with non-marking tyres, designed to minimise the risk of damaging finished floors. These machines are easily identified by the non-marking tyre icon at the top of each page in the machine specification section of this brochure.

If a machine without non-marking tyres is required for work on a finished floor, wheel covers can be fitted to protect the flooring.

Lighting Frames and Camera Cages

Nationwide Platforms offers a variety of machines suitable for mounting lighting equipment and cameras, making them ideal for broadcast, cinema and other media applications.



For easy reference look out for the icons to identify which machines can be fitted with optional extras designed for media and broadcasting applications.

0345 745 0000

nationwideplatforms.co.uk

Accessories

Power to Platform

Most machines are fitted with a 110v socket at ground level that can be connected to your power source. Power is fed through an internal lead within the machine structure to the platform socket. Using this feature ensures that extension cables do not become trapped in the machine or dangle over buildings and other workers.



For easy reference look out for the icon to identify which machines have power to platform.

Onboard Generators

Many diesel powered machines also have an onboard generator which removes the need to hire a separate generator or have leads trailing from the machine across the workplace. Please request an onboard generator when ordering your machine.



Look out for the icon to identify the machines which can be hired with on board generators.

Chalwyn Valves

Chalwyn valves can be attached to a diesel engine air intake system. The valve is designed to safely shutdown the engine in the event of external vapours or gasses being sucked into the engine through the air intake.

In areas where there is a chance of vapour ignition a chalwyn valve will normally be specified by the site owner. Typical uses are in petrochemical plants and refineries including refurbishment of petrol station forecourts.

The valve can be fitted to all diesel scissor and boom lifts.

Please note: a minimum of 48 hours notice is required to fit the chalwyn valve.

Spark Arrestors

Spark arrestors are attached to the exhaust system of diesel machines to eliminate sparks from exiting the exhaust.

Spark arrestors are usually specified by the site contractor or operator and are typically required on petrol station refurbishments, petrochemical plant works and refineries. Spark arrestors can be fitted on request, but must be fitted before the machine reaches site.

Please note: a minimum of 48 hours notice is required prior to delivery.

Earth Bonding

Nationwide Platforms has the UK's largest fleet of boom lifts fitted with earth straps that conform to National Grid specification. This continual safety link running from the platform to the ground safely deflects electric currents, protecting both the machine and its operator from electrocution.

Many site operators request earth bonding if the machine is to be used near live electrical apparatus in locations such as sub stations, power stations and live overhead cables.

Please remember to inform us at the time of booking if you require earth bonding on your machine.

0345 745 0000

nationwideplatforms.co.uk

Distance Conversion

Metric to Imperial (m x 3.281 = ft)				Imperial to Metric (ft x 0.3048 = m)			
m	ft	m	ft	ft	m	ft	m
6.0	- 19' 8"	39.5	- 129' 7"	15	- 4.57		
6.5	- 21' 4"	40.0	- 131' 3"	20	- 6.10		
7.0	- 23' 0"	40.5	- 132' 10"	25	- 7.62		
7.5	- 24' 7"	41.0	- 134' 6"	30	- 9.14		
8.0	- 26' 4"	41.5	- 136' 2"	35	- 10.67		
8.5	- 27' 11"	42.0	- 137' 10"	40	- 12.19		
9.0	- 29' 4"	42.5	- 139' 6"	45	- 13.72		
9.5	- 31' 2"	43.0	- 141' 1"	50	- 15.24		
10.0	- 32' 10"	43.5	- 142' 9"	55	- 16.76		
10.5	- 34' 6"	44.0	- 144' 5"	60	- 18.29		
11.0	- 36' 1"	44.5	- 146' 0"	65	- 19.81		
11.5	- 37' 10"	45.0	- 147' 7"	70	- 21.34		
12.0	- 39' 5"	45.5	- 149' 3"	75	- 22.86		
12.5	- 41' 0"	46.0	- 150' 11"	80	- 24.38		
13.0	- 42' 8"	46.5	- 152' 7"	85	- 25.91		
13.5	- 44' 3"	47.0	- 154' 3"	90	- 27.43		
14.0	- 45' 11"	47.5	- 155' 10"	95	- 28.96		
14.5	- 47' 7"	48.0	- 157' 6"	100	- 30.48		
15.0	- 49' 2"	48.5	- 159' 1"	105	- 32.00		
15.5	- 50' 10"	49.0	- 160' 9"	110	- 33.53		
16.0	- 52' 6"	49.5	- 162' 5"	115	- 35.05		
16.5	- 54' 1"	50.0	- 164' 1"	120	- 36.58		
17.0	- 55' 9"	50.5	- 165' 9"	125	- 38.10		
17.5	- 57' 5"	51.0	- 167' 4"	130	- 39.62		
18.0	- 59' 1"	51.5	- 168' 11"	135	- 41.15		
18.5	- 60' 8"	52.0	- 170' 7"	140	- 42.67		
19.0	- 62' 3"	52.5	- 172' 3"	145	- 44.20		
19.5	- 63' 11"	53.0	- 173' 10"	150	- 45.72		
20.0	- 65' 7"	53.5	- 175' 6"	155	- 47.24		
20.5	- 67' 3"	54.0	- 177' 2"	160	- 48.77		
21.0	- 68' 11"	54.5	- 178' 10"	165	- 50.29		
21.5	- 70' 7"	55.0	- 180' 6"	170	- 51.82		
22.0	- 72' 2"	55.5	- 182' 1"	175	- 53.34		
22.5	- 73' 9"	56.0	- 183' 9"	180	- 54.86		
23.0	- 75' 6"	56.5	- 185' 4"	185	- 56.39		
23.5	- 77' 1"	57.0	- 187' 0"	190	- 57.91		
24.0	- 78' 9"	57.5	- 188' 8"	195	- 59.44		
24.5	- 80' 4"	58.0	- 190' 3"	200	- 60.96		
25.0	- 82' 0"	58.5	- 191' 11"	205	- 62.48		
25.5	- 83' 7"	59.0	- 193' 7"	210	- 64.01		
26.0	- 85' 3"	59.5	- 195' 2"	215	- 65.53		
26.5	- 86' 11"	60.0	- 196' 9"	220	- 67.06		
27.0	- 88' 7"	60.5	- 198' 6"	225	- 68.58		
27.5	- 90' 3"	61.0	- 200' 1"	230	- 70.10		
28.0	- 91' 9"	61.5	- 201' 9"	235	- 71.63		
28.5	- 93' 6"	62.0	- 203' 5"	240	- 73.15		
29.0	- 95' 1"	62.5	- 205' 0"	245	- 74.68		
29.5	- 96' 9"	63.0	- 206' 8"	250	- 76.20		
30.0	- 98' 4"	63.5	- 208' 3"	255	- 77.72		
30.5	- 100' 1"	64.0	- 209' 11"	260	- 79.24		
31.0	- 101' 10"	64.5	- 211' 8"	265	- 80.77		
31.5	- 103' 5"	65.0	- 213' 3"	270	- 82.30		
32.0	- 105' 0"	65.5	- 214' 11"	275	- 83.82		
32.5	- 106' 8"	66.0	- 216' 6"				
33.0	- 108' 3"	66.5	- 218' 3"				
33.5	- 109' 11"	67.0	- 219' 10"				
34.0	- 111' 7"	67.5	- 221' 6"				
34.5	- 113' 2"	68.0	- 223' 1"				
35.0	- 114' 10"	68.5	- 224' 9"				
35.5	- 116' 6"	69.0	- 226' 4"				
36.0	- 118' 1"	69.5	- 228' 0"				
36.5	- 119' 9"	70.0	- 229' 8"				
37.0	- 121' 5"	70.5	- 231' 4"				
37.5	- 123' 0"	71.0	- 232' 11"				
38.0	- 124' 8"	71.5	- 234' 7"				
38.5	- 126' 4"	72.0	- 236' 2"				
39.0	- 127' 11"	72.5	- 237' 5"				

Weight Conversion

Metric to Imperial (kg x 2.204 = lbs)				Imperial to Metric (lbs x 0.4536 = kg)			
kg	lbs	kg	lbs	lbs	kg	lbs	kg
500	- 1,102	27,000	- 59,524	1,000	- 453	54,000	- 24,493
1,000	- 2,204	27,500	- 60,627	2,000	- 907	55,000	- 24,947
1,500	- 3,306	28,000	- 61,729	3,000	- 1,360	56,000	- 25,401
2,000	- 4,409	28,500	- 62,831	4,000	- 1,814	57,000	- 25,854
2,500	- 5,511	29,000	- 63,933	5,000	- 2,267	58,000	- 26,308
3,000	- 6,613	29,500	- 65,036	6,000	- 2,721	59,000	- 26,761
3,500	- 7,716	30,000	- 66,138	7,000	- 3,175	60,000	- 27,215
4,000	- 8,818	30,500	- 67,240	8,000	- 3,628	61,000	- 27,669
4,500	- 9,920	31,000	- 68,343	9,000	- 4,082	62,000	- 28,122
5,000	- 11,023	31,500	- 69,445	10,000	- 4,535	63,000	- 28,576
5,500	- 12,125	32,000	- 70,547	11,000	- 4,989	64,000	- 29,029
6,000	- 13,227	32,500	- 71,650	12,000	- 5,443	65,000	- 29,483
6,500	- 14,330	33,000	- 72,752	13,000	- 5,896	66,000	- 29,937
7,000	- 15,432	33,500	- 73,854	14,000	- 6,350	67,000	- 30,390
7,500	- 16,534	34,000	- 74,957	15,000	- 6,803	68,000	- 30,844
8,000	- 17,636	34,500	- 76,059	16,000	- 7,257	69,000	- 31,297
8,500	- 18,739	35,000	- 77,161	17,000	- 7,711	70,000	- 31,751
9,000	- 19,841	35,500	- 78,264	18,000	- 8,164	71,000	- 32,205
9,500	- 20,943	36,000	- 79,366	19,000	- 8,618	72,000	- 32,658
10,000	- 22,046	36,500	- 80,468	20,000	- 9,071	73,000	- 33,112
10,500	- 23,148	37,000	- 81,570	21,000	- 9,525	74,000	- 33,565
11,000	- 24,250	37,500	- 82,673	22,000	- 9,979	75,000	- 34,019
11,500	- 25,353	38,000	- 83,775	23,000	- 10,432	76,000	- 34,472
12,000	- 26,455	38,500	- 84,877	24,000	- 10,886	77,000	- 34,926
12,500	- 27,557	39,000	- 85,980	25,000	- 11,339	78,000	- 35,380
13,000	- 28,660	39,500	- 87,082	26,000	- 11,793	79,000	- 35,833
13,500	- 29,762	40,000	- 88,184	27,000	- 12,246	80,000	- 36,287
14,000	- 30,864	40,500	- 89,287	28,000	- 12,700	81,000	- 36,740
14,500	- 31,966	41,000	- 90,389	29,000	- 13,154	82,000	- 37,194
15,000	- 33,069	41,500	- 91,491	30,000	- 13,607	83,000	- 37,648
15,500	- 34,171	42,000	- 92,594	31,000	- 14,061	84,000	- 38,101
16,000	- 35,273	42,500	- 93,696	32,000	- 14,514	85,000	- 38,555
16,500	- 36,376	43,000	- 94,798	33,000	- 14,968	86,000	- 39,008
17,000	- 37,478	43,500	- 95,900	34,000	- 15,422	87,000	- 39,462
17,500	- 38,580	44,000	- 97,003	35,000	- 15,875	88,000	- 39,916
18,000	- 39,683	44,500	- 98,105	36,000	- 16,329	89,000	- 40,369
18,500	- 40,785	45,000	- 99,207	37,000	- 16,782	90,000	- 40,823
19,000	- 41,887	45,500	-100,310	38,000	- 17,236	91,000	- 41,276
19,500	- 42,990	46,000	-101,412	39,000	- 17,690	92,000	- 41,730
20,000	- 44,092	46,500	-102,514	40,000	- 18,143	93,000	- 42,184
20,500	- 45,194	47,000	-103,617	41,000	- 18,597	94,000	- 42,637
21,000	- 46,297	47,500	-104,719	42,000	- 19,050	95,000	- 43,091
21,500	- 47,399	48,000	-105,792	43,000	- 19,504	96,000	- 43,544
22,000	- 48,501	48,500	-106,924	44,000	- 19,958	97,000	- 43,998
22,500	- 49,603	49,000	-108,026	45,000	- 20,411	98,000	- 44,452
23,000	- 50,706	49,500	-109,128	46,000	- 20,865	99,000	- 44,905
23,500	- 51,808	50,000	-110,231	47,000	- 21,318	100,000	- 45,359
24,000	- 52,910	50,500	-111,333	48,000	- 21,772	101,000	- 45,812
24,500	- 54,013	51,000	-112,435	49,000	- 22,226	102,000	- 46,266
25,000	- 55,115	51,500	-113,537	50,000	- 22,679	103,000	- 46,719
25,500	- 56,217	52,000	-114,640	51,000	- 23,133	104,000	- 47,173
26,000	- 57,320	52,500	-115,742	52,000	- 23,586	105,000	- 47,628
26,500	- 58,422	53,000	-116,844	53,000	- 24,040	106,000	- 48,081

Product Code	Page Number	Product Code	Page Number
3219	37	GR20	29
3220	40	GS-4047	65
3226	47	GS1532	35
4626	44	GS1932	38
4632	53	GS20	39
8841	71	GS26	42
9241	70	GS2632	48
1200SJP	153	GS2669RT	43
1230ES	26	GS26D-O	46
1250AJP	154	GS32	54
1350SJP	160	GS3232	55
1500AJP	162	GS32D-O	57
165-12	83	GS33	60
195-12	85	GS3369RT	58
30JP	105	GS3390G	62
40NJ	112	GS3390RT	61
45JSX	121	GS4069B	67
45MJ	119	GS43	73
60AJX	133	GS43G	74
66JX	142	GS53	81
6826D	45	GS53G	82
6832D	52	H15SXL	72
6832RTE	56	H18SXL	80
80JX	146	HA12CJ	106
860SJ	151	HA15IP	114
9250X	77	HA16PX	126
COM10	50	HA16RTJ	127
COM10DX	51	HA20PX	136
COM10N	49	HA20RTJPRO	135
COM12	59	HA260PX	145
COM12DX	64	HA32PX	152
COM14	66	HA41RTJPRO	156
COM8	41	HL220D	87
G30N	104	HL220H	86
G34DX	111	HL235D	90
G34N	109	HL275H	92
G60X	134	HL340D	95
G85X	148	HR12NBS	108
GP20	30	HR15NBS	115
GP25	31	HR15NH	116
GR12	25	HR15RT	118
GR15	27	HR17H	130

Product Code

Product Code	Page Number	Product Code	Page Number
HR21B	137	SJ12	24
HR21D	139	SJ16	28
HR21H	138	SJ46AJ	129
HR28H	150	SL210	89
HT23RTJ	143	STAR10	99
HTL4014	235	STAR10A	101
HTL4017	237	SX135HC	159
JCB3070	231	SX150	161
JCB520-40	227	SX180	163
JCB520-50	228	T14GS	174
JCB525-60	229	T17BE	175
JCB531-70	230	T17GS	177
JCB533-105	233	T18AS	178
JCB535-125	234	T18ASH	179
JCB535-140	236	T20C	180
JCB540-170	238	T20GS	182
JCB540-200	239	T20HC	181
JCB926	232	T20M	183
LL15N	78	T21JC	184
LL26X	94	T22AS	185
M250	91	T22GS	186
M4069	68	T22GSH	187
MRT2150	240	T26CX	188
MRT2540	242	T26GS	189
NANO	20	T27R	190
NANOSP	21	T28RX	191
NANOSP+	22	T33R	192
OPT8	36	T33RH	193
PECOLIFT	19	T37B	194
POWERTOWER	23	T37R	195
ROTO4026	243	T38B	196
ROTO4030	244	T44B	197
ROTO6024	241	T46B	198
S125	155	T48P	199
S142-12	69	T50JB	200
S152-12	76	T56B-XR	201
S175-12	79	T58R	202
S225-24	88	T66M-1	203
S280-25	93	T70B	204
S45X	120	T90B	205
S65X	141	TB14HB	209
S85	149	TB14HE	211

Product Code

Product Code	Page Number	Product Code	Page Number
TB15HB	212	V14E	168
TB15HE	213	V16E	169
TB17HB	214	VT12E	167
TB17HE	215	Z135	157
TB18PB	216	Z30N	103
TB20HB	218	Z33E	107
TB20HE	219	Z4525DJX	128
TB26HB	220	Z45BJ	124
TB26HE	221	Z45DJX	117
TB30MB	222	Z45DJXC	123
TB31TB	223	Z60FE	132
TI135EX	173	Z62	140
TITAN40	113	Z80	144
TITAN60	131	ZX135	158
Toucan10E	102		
Toucan12E+	110		

Low Level Access

Product Code	Page Number	Product Code	Page Number
PECOLIFT	19	1230ES	26
NANO	20	GR15	27
NANOSP	21	SJ16	28
NANOSP+	22	GR20	29
POWERTOWER	23	GP20	30
SJ12	24	GP25	31
GR12	25		

Scissor Lifts

Product Code	Page Number	Product Code	Page Number
GS1532	35	GS-4047	65
OPT8	36	COM14	66
3219	37	GS4069B	67
GS1932	38	M4069	68
GS20	39	S142-12	69
3220	40	9241	70
COM8	41	8841	71
GS26	42	H15SXL	72
GS2669RT	43	GS43	73
4626	44	GS43G	74
6826D	45	S152-12	76
GS26D-O	46	9250X	77
3226	47	LL15N	78
GS2632	48	S175-12	79
COM10N	49	H18SXL	80
COM10	50	GS53	81
COM10DX	51	GS53G	82
6832D	52	165-12	83
4632	53	195-12	85
GS32	54	HL220H	86
GS3232	55	HL220D	87
6832RTE	56	S225-24	88
GS32D-O	57	SL210	89
GS3369RT	58	HL235D	90
COM12	59	M250	91
GS33	60	HL275H	92
GS3390RT	61	S280-25	93
GS3390G	62	LL26X	94
COM12DX	64	HL340D	95

Boom Lifts

Product Code	Page Number	Product Code	Page Number
STAR10	99	60AJX	133
STAR10A	101	G60X	134
Toucan10E	102	HA20RTJPRO	135
Z30N	103	HA20PX	136
G30N	104	HR21B	137
30JP	105	HR21H	138
HA12CJ	106	HR21D	139
Z33E	107	Z62	140
HR12NBS	108	S65X	141
G34N	109	66JX	142
Toucan12E+	110	HT23RTJ	143
G34DX	111	Z80	144
40NJ	112	HA260PX	145
TITAN40	113	80JX	146
HA15IP	114	G85X	148
HR15NBS	115	S85	149
HR15NH	116	HR28H	150
Z45DJX	117	860SJ	151
HR15RT	118	HA32PX	152
45MJ	119	1200SJP	153
S45X	120	1250AJP	154
45JSX	121	S125	155
Z45DJXC	123	HA41RTJPRO	156
Z45BJ	124	Z135	157
HA16PX	126	ZX135	158
HA16RTJ	127	SX135HC	159
Z4525DJX	128	1350SJP	160
SJ46AJ	129	SX150	161
HR17H	130	1500AJP	162
TITAN60	131	SX180	163
Z60FE	132		

Van Mounts

Product Code	Page Number	Product Code	Page Number
V14E	168	VT12E	167
V16E	169		

Truck Mounts

Product Code	Page Number	Product Code	Page Number
T1135EX	173	T27R	190
T14GS	174	T28RX	191
T17BE	175	T33R	192
T17GS	177	T33RH	193
T18AS	178	T37B	194
T18ASH	179	T37R	195
T20C	180	T38B	196
T20HC	181	T44B	197
T20GS	182	T46B	198
T20M	183	T48P	199
T21JC	184	T50JB	200
T22AS	185	T56B-XR	201
T22GS	186	T58R	202
T22GSH	187	T66M-1	203
T26CX	188	T70B	204
T26GS	189	T90B	205

Tracked Booms

Product Code	Page Number	Product Code	Page Number
TB14HB	209	TB20HE	219
TB14HE	211	TB26HB	220
TB15HB	212	TB26HE	221
TB15HE	213	TB31TB	223
TB17HB	214	TB18PB	216
TB17HE	215	TB30MB	222
TB20HB	218		

Telehandlers

Product Code	Page Number	Product Code	Page Number
JCB520-40	227	JCB535-140	236
JCB520-50	228	HTL4017	237
JCB525-60	229	JCB540-170	238
JCB531-70	230	JCB540-200	239
JCB3070	231	MRT2150	240
JCB926	232	ROTO6024	241
JCB533-105	233	MRT2540	242
JCB535-125	234	ROTO4026	243
HTL4014	235	ROTO4030	244



0345 745 0000

nationwideplatforms.co.uk

IPAF Rental+ provides assurance to customers at every stage of the MEWP hire/rental process.

Known in the industry as the independent quality mark for powered access hire companies, IPAF Rental+ is awarded to those who meet the most stringent standards of training, advice, equipment and customer satisfaction set by a committee of the most experienced players in the powered access rental business.

The Gold standard means Nationwide Platforms has displayed exemplary standards recognised by IPAF as a company who provides significant investment to go above and beyond the minimum standard.



Nationwide Platforms
has been awarded
with **Gold IPAF Rental+**



**THE HIGHEST
STANDARD IN
POWERED ACCESS
EQUIPMENT HIRE**

PLEASE NOTE:

All technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the full manufacturer specification or equipment user guides.

All information provided is subject to alteration and amendment without prior notice. Please contact Nationwide Platforms for confirmation of machine performance and specification when placing your order.

Nationwide Platforms

A **LOXAM** Company

Nationwide Platforms

15 Midland Court,
Central Park,
Lutterworth,
Leicestershire,
LE17 4PN



0345 745 0000
nationwideplatforms.co.uk

