



Our handy icons will  
indicate where we have  
greener options available



# Powered Access Selection Guide

2025 digest edition



**0345 745 0000**  
[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)

 **Nationwide  
Platforms**  
A **LOXAM** Company



# Your local specialist, throughout the UK

Wherever you are, we're on hand  
with the fleet and knowledge to  
deliver the machines you need,  
to your chosen location, at the  
right time.

**0345 745 0000**  
[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)



# Contents

|                              |       |
|------------------------------|-------|
| Welcome                      | 2-3   |
| my.NationwidePlatforms       | 4-5   |
| Service and support          | 6-7   |
| The environment              | 8-9   |
| Training / National coverage | 10-11 |
| Safety innovations           | 12-13 |
| Harness ON™                  | 14    |
| SkySiren® PCS™ for Scissor   | 15    |
| Low level                    | 16-21 |
| Scissors                     | 22-35 |
| Booms                        | 36-51 |
| Van mounts                   | 52-55 |
| Truck mounts                 | 56-61 |
| Tracked booms                | 62-65 |
| Telehandlers                 | 66-67 |




# Welcome to Nationwide Platforms

**Your safety, is absolutely our priority.**

**With depots conveniently located across the country, our local dedicated teams are always on hand to offer you help, guidance and support to meet your working at height needs.**

Our large and diverse fleet range will ensure that we have the right solution for your project, no matter the height, ground conditions or access restrictions. And with specialist knowledge in many sectors including construction, aviation, warehousing, industrial services and telecoms we have the know-how to ensure your success.

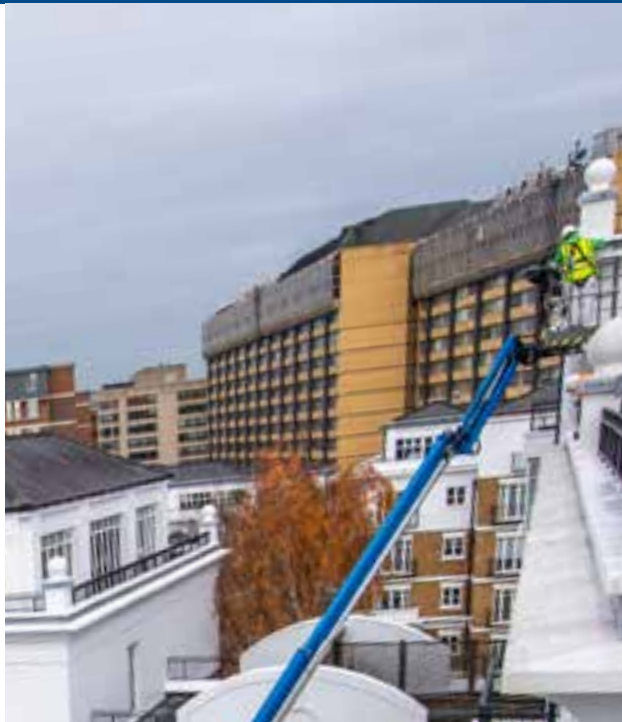



We pride ourselves on our long history of driving forward improvements in safety standards across the industry, whether that is through the adoption of secondary guarding for both boom and now scissor lifts, through to the roll out of Harness ON™, our award-winning BlueSky Solutions team are always on hand to guide and advise.

Our local depot teams and hire desks offer dedicated customer service, available just a call away, but when time is of the essence we also have our digital account management service, my.NationwidePlatforms, available where you can place hires, book training, off-hire a machine and see your invoicing, all in one handy platform available 24/7.

Scan the QR code to speak  
to your **local depot**, or call

 **0345 745 0000**  
[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)



# Introducing my.NationwidePlatforms

Our online account management service that gives you access to manage your account at the touch of a button, 24/7.

Through a suite of online tools, you can easily monitor and maintain your account at a time that suits you.

- **my.Hires** – enables you to place hires, extend the hire period or off-hire for collection, see previous orders and proof of delivery & collection.
- **my.Training** – you can easily book courses, manage & update the delegate details right up to the training day.
- **my.Finance** – you can view, print and query invoices and see your current statement of account.
- **my.Admin** – manage access to the different features and capabilities of the platform where the account needs multiple users.



## HireTracker

Our HireTracker service keeps you up to date with each stage of your delivery and collection. You can choose who gets the notification, whether that is the order placer or the site contact taking delivery, you'll be given a three-hour delivery window and by using the link in the email or SMS you can see your live tracking.

## What3Words


What3Words helps with the accuracy of deliveries and collections, each 3m<sup>2</sup> location on the planet has its own unique What3Words reference, making it perfect for hard-to-find sites. Remember to give us your unique reference when you place your next hire.



Register now at  
***my.NationwidePlatforms.co.uk***



**0345 745 0000**  
**nationwideplatforms.co.uk**

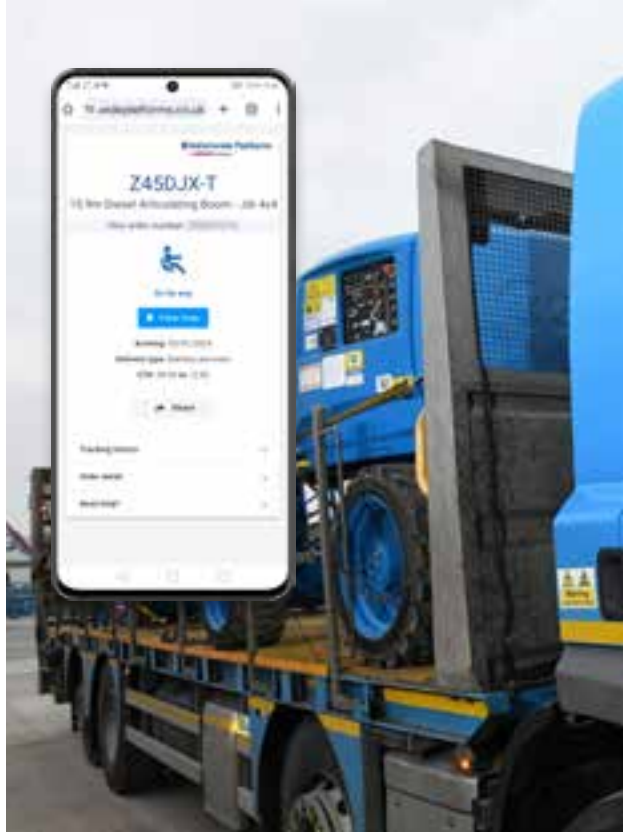

# Service and support

## Getting you back on track when things go wrong

Through the launch of Visual Remote Assistance (VRA) we are often able to fix some of the common faults or user errors without the need to despatch an engineer - getting you back to work much quicker.

The service is powered through a video call enabling our skilled engineers on the other end of the call to see the machine, diagnose the issue and in many cases resolve the problem. This reduces the need for our engineers to travel to site and frees them up to support other customers who need our help.

To speak to our **Technical Services Team**, call and select option 4



**0345 745 0000**

[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)



## All the data at the tips of your fingers

With Telematics now fitted to more than 90% of our fleet, the benefits are invaluable. You can:

- Prevent unauthorised use
- Track machine locations on-site
- Set up geo-fencing to manage movement on-site
- Battery management and low battery alerts
- Gain an insight into your operator's behaviours and work practices on-site
- Manage your machines on-site and your sub-contractors
- See the machine utilisation

Speak to us about how  
**Telematics** can support you.

 **0345 745 0000**  
[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)



# The environment

## Helping you to make greener choices

Over the last few years we have focused on the many ways we have been able to make a difference and support our customers' commitments to building a more sustainable future.

## Green alternatives

More than half of our fleet are either electric, hybrid or manual push-around machines. You can reach up to 28m with one of our hybrid MEWPs and 22m by electric.

We've made it really easy for you to pick out the greener alternatives in this guide, look out for one of these icons:



## Lowering emissions

For some of our machines the electric and hybrid technology just isn't advanced enough yet, where this is the case, we invest in lowering emissions with EU Standard Stage V compliant engines.

## Electric / Hybrid

Hybrid products have a jade **HYBRID** badge.

Electric products can be identified by a green **ELECTRIC** product badge.

| BOOMS              |  | Genie Z45DJXC   | Genie Z45FES  | Genie Z45BJ   | Genie Z45EJ   | Haulotte HA16PX   | Haulotte HA16RTJ  |
|--------------------|--|---|---|---|---|---|---|
|                    |  |  |  |  |  |  |  |
| Working height (m) |  | 15.86   | 15.92   | 15.94   | 15.94   | 16.0  | 16.0  |



## Renewable Diesel

Where only a diesel machine will do the job, we now offer Hydrotreated Vegetable Oil (HVO), also known as Renewable Diesel, as an alternative to white diesel. All our diesel MEWPs can be operated using HVO.

## Green deliveries

Our delivery fleet are all Euro VI compliant and recently our first FM Electric Volvo 4x2 tractor units hit the roads, enabling us to make deliveries and collections with low or zero tail pipe emissions.



To find out about our  
**Greener product range**, call today.



**0345 745 0000**

[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)



# Training

## Safety starts with the right training

As Europe's market leading Powered Access Training company, we offer a range of courses backed by some of the leading trade bodies including IPAF, PASMA, IOSH and the Ladder Association.

With training locations across the UK, our expert training instructors train more than 22,000 delegates each year, and we can even arrange training on your site if that is more convenient.



To find out about our **Training**, or to book a course, call and select option 3



**0345 745 0000**  
[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)



### IPAF Operator Courses


1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training



# National coverage

**Your local specialists,  
throughout the UK**

Wherever you are, we're on hand with the fleet and knowledge to deliver the machines you need, to your chosen location, at the right time.



To find your nearest **Depot**,  
scan the QR code or call us today.



**0345 745 0000**

**[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)**



# Safety innovations

## Introducing BlueSky Solutions

Our research and development team at Nationwide Platforms believe in driving change in the industry through innovations and bespoke solutions to improve safety and tackle key causes of harm or fatality.

Our innovations are centred around preventing accidents and increasing efficiency:

- Avoidance of entrapment through secondary guarding and intelligent secondary guarding.
- Telemetry data and technology preventing unauthorised use of a platform and providing dashboard data and alerts to make managing a site more efficient and effective.
- Material Handling Attachments to reduce the risk of dropped objects and manual lifting.



**SkySiren®**



**SkySiren®**  
**PCS™**






**SkyRak<sup>®</sup>**



**SkyRakPlus<sup>®</sup>**



**SkyRakBoom<sup>®</sup>**

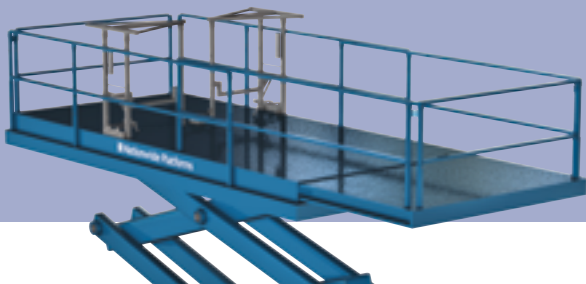

**SkySentry<sup>™</sup>**



**Harness ON<sup>™</sup>**

**Harness ON<sup>™</sup>**  
fitted on  
all BOOMS



To find out about our  
**Safety innovations**, call today.



**0345 745 0000**

[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)



# Harness ON™

**Harness ON™ is an intelligent anchor point that stops the MEWP's operation until the operator attaches their harness carabiner.**

Harness ON is permanently shackled to the MEWP's anchor point and wired electronically into the MEWP's function controls.

Once the carabiner is clipped onto Harness ON, an electronic signal tells the MEWP that operation is now safe and allows function until the carabiner is finally unclipped.



To find out more,  
scan the QR code



A simple, unobtrusive  
& compliant device



...representing a  
step change in safe  
working at height

# SkySiren® PCS™ for Scissor

## Introducing SkySiren® PCS™ for Scissor.

Building on the success of the award winning SkySiren pre-crush sensing (PCS) technology for booms launched in 2017, our BlueSky Solutions team have recently developed a pre-crush sensing secondary guarding solution for scissor lifts, SkySiren PCS for Scissors.



Scan the QR code to see how  
**SkySiren PCS for Scissor** works,  
or to find out more, email  
[pcs.scissor@nationwideplatforms.co.uk](mailto:pcs.scissor@nationwideplatforms.co.uk)





# Low level

Our low level platforms offer access up to 8m and safe working loads up to 250kg. Suitable for indoor and outdoor use, our low level access platforms deliver compact access and are a safe alternative to ladders and towers for a variety of uses.

For more information, advice, training and to hire from our wide range of **low level platforms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.





# LOW LEVEL




## Power Towers PECOLIFT

## JLG ECO-WR

## Power Towers NANO

## Power Towers NANOSP

## Power Towers NANOSP+



### Working height (m)

**3.5**

**4.2**

**4.5**

**4.5**

**4.5**

Closed length (m)

0.98

1.28

1.195

1.2

1.2

Closed height (m)

1.55

1.94

1.56

1.59

1.59

Closed width (m)

0.75

0.95

0.75

0.75

0.75

Platform size (m)

0.72 x 0.60

0.85 x 0.64

1.0 x 0.73

1.0 x 0.73

1.0 x 0.73

Platform length (deck extended) (m)

N/A

N/A

N/A

1.5

2.0

Max SWL (kg)

150

150

200

200

200

Weight (kg)

180

335

285

506

550

### Alternative machines

NANO

NANOSP

NANO  
NANOSP+

NANO  
NANOSP




0345 745 0000






Bravi  
**LEONARDO  
-WD**




**4.9**

Popup  
**POPUP**




**4.95**

Power Towers  
**POWER  
TOWER**




**5.1**

Genie  
**GR12**



**5.58**

Skyjack  
**SJ12**



**5.65**

## Working height (m)

Closed length (m)

1.2

1.31

1.6

1.35

1.37

Closed height (m)

1.72

1.75

1.92

1.79

1.79

Closed width (m)

0.76

0.76

0.78

0.76

0.77

Platform size (m)

1.04 x 0.63

1.04 x 0.52

1.52 x 0.65

0.89 x 0.75

0.93 x 0.69

Platform length  
(deck extended) (m)

1.7

N/A

N/A

1.35

N/A

Max SWL (kg)

180

240

250

227

227

Weight (kg)

560

394

342

862

863

## Alternative machines

Power Tower

NANO, NANO SP,  
POPUP

SJ12

GR12



0345 745 0000





# LOW LEVEL

Skyjack  
SJ12E

Genie  
GR15

Dingli  
AMWP7  
-8100L

Skyjack  
SJ16E



## Working height (m)

**5.66**

**6.62**

**6.7**

**6.72**

Closed length (m)

1.37

1.45

1.45

1.37

Closed height (m)

1.88

1.79

1.99

1.88

Closed width (m)

0.77

0.76

0.76

0.77

Platform size (m)

0.91 x 0.69

0.94 x 0.75

1.0 x 0.76

0.91 x 0.69

Platform length (deck extended) (m)

N/A

1.4

1.5

N/A

Max SWL (kg)

227

227

200

227

Weight (kg)

913

994

990

931

## Alternative machines

GR12

SJ16  
AMWP7-8100L



SJ16  
GR15

GR15  
AMWP7-8100L



0345 745 0000





## Working height (m)

6.75

7.85

8.0

Closed length (m)

1.37

1.35

1.39

Closed height (m)

1.79

1.98

1.99

Closed width (m)

0.77

0.8

0.8

Platform size (m)

0.85 x 0.69

0.89 x 0.75

0.71 x 0.75

Platform length (deck extended) (m)

N/A

1.4

1.26

Max SWL (kg)

227

159

159

Weight (kg)

971

1264

1285

## Alternative machines

GR15  
AMWP7-8100L

GR15  
3219, GS20

GR20



0345 745 0000







# Scissor lifts

Providing access up to 33.5m, our wide range of scissor lifts offer versatile access both indoors and outdoors, with electric, hybrid, and diesel options available.

For more information, advice, training and to hire from our wide range of **scissor lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



# SCISSORS

Skyjack  
SJ3219







Dingli  
0807AC

Skyjack  
3219

Genie  
GS1932

Dingli  
0807PA

Genie  
GS20



## Working height (m)

**7.65**

**7.8**

**7.8**

**7.8**

**7.8**

**7.92**

Closed length (m)

1.55

1.86

1.78

1.82

1.86

2.45

Closed height (m)

2.13

2.15

2.11

2.11

2.15

2.1

Closed height (rails lowered) (m)

1.78

1.83

1.64

1.76

1.83

1.75

Closed width (m)

0.81

0.76

0.81

0.81

0.76

0.81

Platform size (m)

1.55 x 0.66

1.67 x 0.74

1.63 x 0.71

1.64 x 0.74

1.67 x 0.74

2.21 x 0.70

Platform length (deck extended) (m)

2.46

2.57

2.53

2.54

2.57

3.2

Max SWL (kg)

227

230

227

227

230

363

Weight (kg)

1476

1630

1312

1503

1650

1559

## Alternative machines

3219, GS1932

SJ3219,  
GS1932, 3219

GS1932, GS20,  
0807AC

3219, 3220,  
GS20

3220,  
COM8









0345 745 0000

25







## Working height (m)

**8.0**

**8.0**

**8.1**

**8.1**

**8.2**

**9.75**

Closed length (m)

2.48

2.48

2.32

2.32

2.49

2.45

Closed height (m)

2.23

2.28

2.08

2.1

2.0

2.17

Closed height  
(rails lowered) (m)

1.87

1.92

1.73

1.75

1.13

1.99

Closed width (m)

0.83

0.83

0.81

0.84

0.81

1.17

Platform size (m)

2.27 x 0.81

2.27 x 0.81

2.13 x 0.71

2.11 x 0.71

2.31 x 0.81

2.21 x 0.94

Platform length  
(deck extended) (m)

3.17

3.17

3.04

3.23

3.23

3.2

Max SWL (kg)

380

380

408

408

350

454

Weight (kg)

2160

2340

1594

1967

1655

2478

## Alternative machines

3220, COM8  
GS20

GS20  
2030ES

COM8, GS20  
3220

GS2632  
3226



0345 745 0000



# SCISSORS

Skyjack  
SJ4726







Skyjack  
4626

Genie  
GS2669RT

Skyjack  
6826D

Skyjack  
3226

Genie  
GS2632



## Working height (m)

**9.82**

**9.9**

**9.9**

**9.92**

**9.92**

**9.92**

Closed length (m)

2.32

2.31

3.12

3.12

2.32

2.44

Closed height (m)

2.1

2.15

2.59

2.37

2.15

2.26

Closed height (rails lowered) (m)

1.72

1.79

1.92

1.61

1.91

1.91

Closed width (m)

1.19

1.17

1.75

1.72

0.81

0.81

Platform size (m)

2.11 x 1.07

2.11 x 1.07

2.79 x 1.6

2.44 x 1.42

2.13 x 0.71

2.26 x 0.79

Platform length (deck extended) (m)

3.33

3.01

4.5

3.94

3.23

3.18

Max SWL (kg)

454

454

680

567

227

227

Weight (kg)

2135

2130

3768

3305

1890

1956

## Alternative machines

COM10  
4626

GS26

6826D,  
GS26D-O

GS26D,  
SR0818D

GS2632






2630,  
3226



0345 745 0000

27





## Working height (m)

**9.92**

**10.0**

**10.0**

**10.15**

**10.3**

Closed length (m)

2.32

2.48

2.49

2.31

3.17

Closed height (m)

2.29

2.36

2.18

2.14

2.44

Closed height  
(rails lowered) (m)

1.93

2.0

1.32

1.28

1.59

Closed width (m)

0.84

0.83

0.81

1.2

1.78

Platform size (m)

2.11 x 0.71

2.27 x 0.81

2.31 x 0.81

2.31 x 1.2

2.45 x 1.45

Platform length

(deck extended) (m)

3.23

3.17

3.23

3.23

3.7

Max SWL (kg)

227

230

230

450

565

Weight (kg)

2014

2410

2190

2330

3520

## Alternative machines

GS2632, 3226,  
COM10N

GS2632, 3226  
COM10N

GS26D,  
6826D



0345 745 0000



# SCISSORS

Skyjack  
SJ4732







Skyjack  
4632

Genie  
GS32

Skyjack  
6832D

Skyjack  
6832RTE

Genie  
GS3369RT



## Working height (m)

**11.65**

**11.75**

**11.75**

**11.75**

**11.75**

**11.96**

Closed length (m)

2.32

2.31

2.43

3.35

3.35

3.12

Closed height (m)

2.39

2.24

2.3

2.51

2.51

2.59

Closed height (rails lowered) (m)

1.99

1.96

1.8

1.75

1.75

1.92

Closed width (m)

1.19

1.17

1.17

1.76

1.76

1.75

Platform size (m)

2.11 x 1.07

2.11 x 1.07

2.26 x 1.16

2.44 x 1.42

2.44 x 1.42

2.79 x 1.6

Platform length (deck extended) (m)

3.33

3.01

3.25

4.11

4.11

4.5

Max SWL (kg)

318

317

318

454

454

454

Weight (kg)

2571

2300

2796

3685

3845

3949

## Alternative machines

4632,  
GS32

GS32

3246

GS32D,  
SR1018D







6832D



0345 745 0000

29





## Working height (m)

**12.0**

**12.06**

**12.06**

**12.06**

**13.7**

**13.8**

Closed length (m)

2.49

3.17

4.88

4.88

2.44

2.74

Closed height (m)

2.39

2.56

2.71

2.71

2.54

2.5

Closed height (rails lowered) (m)

1.53

1.7

2.03

2.03

1.88

2.08

Closed width (m)

1.2

1.78

2.29

2.29

1.19

1.2

Platform size (m)

2.31 x 1.2

3.7 x 1.78

4.81 x 1.83

4.81 x 1.83

2.26 x 1.15

2.3 x 1.2

Platform length (deck extended) (m)

3.23

N/A

7.38

7.38

3.36

3.22

Max SWL (kg)

300

450

1134

1134

350

350

Weight (kg)

2470

4110

6890

6826

3221

3175

## Alternative machines

GS32,  
4632

GS3369RT,  
GS32D-O

6832D,  
SR1023D,  
GS3369RT

GS43G,  
GS53G

COM14,  
1412AC

LL15N, 4069,  
S152-12



0345 745 0000



# SCISSORS

Dingli  
**1412AC**







Skyjack  
**SJ4740**

Skyjack  
**8841**

Haulotte  
**H15SX**

LGMG  
**SR1323D**

Genie  
**GS43**



## Working height (m)

**13.8**

**13.86**

**14.5**

**15.0**

**15.0**

**15.1**

Closed length (m)

2.48

2.4

3.49

4.18

4.9

4.88

Closed height (m)

2.62

2.53

2.9

2.77

2.96

2.93

Closed height  
(rails lowered) (m)

2.09

2.03

2.22

1.91

2.28

2.25

Closed width (m)

1.19

1.19

2.21

2.25

2.3

2.29

Platform size (m)

2.27 x 1.12

2.19 x 1.06

3.51 x 1.76

3.91 x 1.89

3.98 x 1.83

4.81 x 1.83

Platform length  
(deck extended) (m)

3.17

3.1

4.71

6.0

7.4

7.38

Max SWL (kg)

320

350

680

500

910

680

Weight (kg)

2990

2970

5289

6340

7360

7323

## Alternative machines

COM14, 4740,  
GS-4047

GS-4047,  
1412AC

GS43

GS43

GS43,  
8841







SR1323D,  
8841



0345 745 0000

31





## Working height (m)

**15.1**

**15.2**

**15.7**

**15.7**

**17.2**

**17.5**

Closed length (m)

4.88

3.35

2.84

2.84

4.47

3.34

Closed height (m)

2.93

3.0

2.62

2.62

3.16

3.15

Closed height (rails lowered) (m)

2.25

2.25

2.09

2.09

2.29

2.38

Closed width (m)

2.29

1.19

1.25

1.25

2.34

1.19

Platform size (m)

4.81 x 1.83

3.04 x 1.18

2.64 x 1.12

2.64 x 1.12

4.27 x 1.88

3.04 x 1.18

Platform length (deck extended) (m)

7.38

4.24

3.74

3.54

7.2

4.25

Max SWL (kg)

680

500

250

250

681

500

Weight (kg)

7323

4700

3360

3580

7395

5350

## Alternative machines

GS53G

LL15N,  
GS-4047

9250X-O

LL15N



0345 745 0000





# SCISSORS

LGMG  
**SR1623D**

Haulotte  
**H18SX**


Skyjack  
**SJ9253RT**

Genie  
**GS53**

Genie  
**GS53G**


## Working height (m)

Closed length (m)  
Closed height (m)  
Closed height (rails lowered) (m)  
Closed width (m)  
Platform size (m)  
Platform length (deck extended) (m)  
Max SWL (kg)  
Weight (kg)




**17.9**

4.9  
3.18  
2.5  
2.3  
3.98 x 1.83  
7.4  
680  
8200




**18.0**

4.18  
2.99  
2.11  
2.25  
4.0 x 1.89  
6.0  
500  
7360




**18.15**

4.42  
3.19  
2.4  
2.3  
4.31 x 1.9  
7.12  
681  
8215



**18.15**

4.88  
3.15  
2.47  
2.29  
4.81 x 1.83  
7.38  
680  
8050



**18.2**

3.98  
3.15  
2.47  
2.29  
4.81 x 1.83  
7.38  
680  
9541

## Alternative machines

GS53,  
H18SX



GS53



GS53, 9250X,  
H18SX



LL20X



GS43G



0345 745 0000





Holland Lift  
**165-12**







Holland Lift  
**HL190E**

Dingli  
**1912DC**

Holland Lift  
**195-12**

Holland Lift  
**HL220H**

Holland Lift  
**HL220D**



## Working height (m)

**18.5**

**18.8**

**19.0**

**21.4**

**21.7**

**21.9**

Closed length (m)

3.74

3.74

4.72

3.74

4.84

4.84

Closed height (m)

3.4

3.4

3.57

3.74

3.65

3.65

Closed height  
(rails lowered) (m)

2.65

2.24

2.74

3.01

2.88

2.88

Closed width (m)

1.2

1.2

1.25

1.2

2.44

2.44

Platform size (m)

3.38 x 1.16

3.38 x 1.16

4.3 x 1.19

3.38 x 1.16

4.5 x 2.3

4.5 x 2.3

Platform length  
(deck extended) (m)

4.88

4.88

6.1

4.88

7.0

7.0

Max SWL (kg)

500

500

750

500

750

750

Weight (kg)

7985

7985

11750

9120

13900

12140

## Alternative machines

180-12, LL15N,  
LL17E, S175-12

195-12,  
1912DC

HL190E

SL180N

HL220D,  
LL20X, S225

LL20X, HL235D



0345 745 0000



# SCISSORS


Dingli  
**2212DC**

Dingli  
**2223RTB**


HAB  
**S225-24**

Holland Lift  
**HL235D**


Holland Lift  
**M250**




**22.0**




**22.0**



**22.5**



**23.2**



**27.0**

## Working height (m)

Closed length (m)

4.72

4.95

4.84

5.75

6.57

Closed height (m)

3.82

3.86

3.72

4.01

3.89

Closed height (rails lowered) (m)

2.99

3.0

2.88

3.1

3.13

Closed width (m)

1.25

2.46

2.39

2.49

2.65

Platform size (m)

4.3 x 1.19

4.59 x 2.25

4.5 x 2.36

5.22 x 2.40

6.15 x 2.50

Platform length (deck extended) (m)

6.1

7.29

7.2

7.32

8.25

Max SWL (kg)

600

750

750

1000

1000

Weight (kg)

12350

13000

11000

18100

21910

## Alternative machines

195-12

S225-24,  
HL220D

LL20X

LL20X,  
HL220D







SL245



0345 745 0000

35





## Working height (m)

**27.2**

**27.2**

**28.0**

**28.0**

**32.0**

**33.5**

Closed length (m)

6.57

6.57

5.96

5.96

6.73

7.02

Closed height (m)

3.89

3.89

4.13

4.1

4.13

3.63

Closed height  
(rails lowered) (m)

3.13

3.13

3.19

3.4

3.19

2.87

Closed width (m)

2.5

2.5

2.5

2.5

2.55

2.98

Platform size (m)

6.15 x 2.35

6.15 x 2.35

5.48 x 2.45

5.48 x 2.44

6.2 x 2.45

6.66 x 2.80

Platform length  
(deck extended) (m)

8.25

8.25

7.58

7.57

8.3

9.66

Max SWL (kg)

1000

1000

1000

750

1000

1000

Weight (kg)

25100

22670

19800

18000

24620

31350

## Alternative machines

S280

M250, S280

S280-25

2825RT

HL340D

3223RT



0345 745 0000





# Booms

We have a wide range of electric, hybrid, gas and diesel boom lifts for hire. For indoor and outdoor jobs requiring up-and-over access, our booms offer working height access up to 58.5m and useful outreach of up to 27.4m.

For more information, advice, training and to hire from our wide range of **boom lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



Haulotte  
**STAR10A**

JLG  
**Toucan 10E**






Dingli  
**BA11NE**

Genie  
**Z30N**

Skyjack  
**SJ30 ARJE**

Dingli  
**AMWP 11.5-8100**

Dingli  
**AMWP 11.5-82AC**



**Working height (m)**

**10.0**

**10.1**

**10.8**

**10.89**

**11.0**

**11.2**

**11.2**

**Horizontal outreach (m)**

**3.0**

**3.38**

**6.35**

**6.25**

**6.26**

**3.0**

**3.0**

Reach below ground

N/A

N/A

N/A

N/A

N/A

N/A

N/A

Closed length (m)

2.7

2.82

5.52

5.31

5.51

2.53

2.62

Closed height (rails up) (m)

1.99

1.99

2.0

2.0

1.98

1.99

1.99

Closed width (m)

1.0

0.99

1.2

1.19

1.19

1.00

1.00

Platform size (m)

0.78 x 0.98

0.70 x 0.90

0.76 x 1.17

1.17 x 0.76

1.17 x 0.76

0.87 x 0.62

0.93 x 0.69

Rotation (°)

345

360

355

355

355

345

345

Max SWL (kg) #

200

200

227

227

227

200

200

Weight (kg)

2677

2980

6660

6450

5750

2950

2970

**Alternative machines**

STAR10,  
AMWP11.5-8100

STAR10,  
STAR10A,  
Toucan12E+

Z30N,  
SJ30ARJE

30J

Z30N,  
HA12CJ

STAR10,  
STAR10A,  
AMWP11.5-82AC

Star10A,  
AMWP11.5-8100

0345 745 0000



39

**Harness ON™**  
fitted on  
all BOOMS

# Depending on load, angle of rotation and outrigger configuration.



**Working height (m)**

**Horizontal outreach (m)**

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

**Alternative machines**

0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS

40

Dingli  
**AMWP  
11.5-81**



**11.2**

**3.0**

N/A

2.72

1.99

1.00

0.87 x 0.62

345

200

2950

STAR10, STAR10A,  
Toucan10E,  
Toucan12E+



Haulotte  
**HA12CJ**



**11.68**

**6.94**

N/A

5.36

1.99

1.2

1.14 x 0.8

355


250

7065

G30N,  
Z30N



Dingli  
**BA12NE**



**11.8**

**6.5**

N/A

3.89

2.29

1.2

0.76 x 1.17

355

227

7080

BA11NE, Z30N,  
HA12CJ



Genie  
**Z33E**



**12.0**

**5.57**

N/A

4.17

1.98

1.5

1.16 x 0.76

400


200

3665

HR12NB



Nifty Lift  
**HR12NBS**



**12.2**

**6.1**

N/A

4.1

1.9

1.5

1.10 x 0.65

360


200

3435

HR12N



Genie  
**G34N**



**12.52**

**6.78**

N/A

5.72

2.0

1.47

1.42 x 0.76

355

227







5171

HR12NB,  
Z33



# Depending on load, angle of rotation and outrigger configuration.





**Working  
height (m)**

**14.87**

**15.4**

**15.5**

**15.56**

**15.69**

**15.72**

**Horizontal  
outreach (m)**

**8.65**

**9.6**

**9.7**

**11.0**

**7.6**

**7.62**

Reach below ground

N/A

N/A

N/A

1.27

N/A

N/A

Closed length (m)

6.65

6.3

6.4

9.47

6.78

6.57

Closed height

(rails up) (m)

2.1

2.1

1.99

2.51

2.08

2.27

Closed width (m)

1.52

1.5

1.5

2.49

2.23

2.35

Platform size (m)

1.15 x 0.8

1.5 x 0.70

1.5 x 0.8

2.44 x 0.91

1.82 x 0.76

1.83 x 0.76

Rotation (°)

355

360

360

Continuous

359

355

Max SWL (kg) #

230

225

225

454-300†

227

454-299†

Weight (kg)

7230

6680

7250

7394

6542 / 6892\*

7507

**Alternative machines**

HR15NH,  
HR15NBS

Z45BJ

HR15NB

460SJHCS,  
SJ45T+

Z45D,  
Z45D-R

Z45DJXC



0345 745 0000







**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.

\* Air filled / Foam filled





**Working  
height (m)**

**Horizontal  
outreach (m)**

**15.72**

**15.72**

**15.72**

**15.72**

**15.75**

**15.8**

**6.93**

**7.47**

**7.24**

**7.24**

**12.1**

**7.81**

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

1.4

N/A

N/A

N/A

2.0

N/A

6.0

2.24

6.45

6.5

8.83

6.66

2.06

2.24

2.01

2.01

2.4

1.98

2.29

2.34

1.75

1.75

2.29

1.8

1.83 x 0.76

1.83 x 0.76

0.76 x 1.52

1.52 x 0.76

2.44 x 0.91

1.83 x 0.76

355

180

360

360

Continuous

355

300

230

230

230

454

230

5075

7242

6722

6532

7160

7500

**Alternative machines**

Z45DJXC,  
45AJHCS

HA16SPX

Z45EJ

45MJP

S45XCS,  
460SJHCS

Z45EJ,  
Z45E, 45EJ




0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.



## 16.0

## 8.3

6.75

## 2.3

## 2.3

 $1.83 \times 0.8$ 


355

230

6200


Z4525DJX,  
45JSX, SJ46AJ






**16.05**

**7.52**




**16.05**

**12.2**




**16.09**

**7.67**



**16.1**

**7.54**



**17.2**

**9.4**



**20.0**

**14.6**

**Working height (m)**

**Horizontal outreach (m)**

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

N/A

6.65

2.13

2.29

1.83 x 0.76

355

227

6574

7.0

8.91

2.47

2.31

2.44 x 0.91

360

454-299†

9306

N/A

6.77

2.17

2.31

1.83 x 0.76

355

230

7160

1.5

6.5

2.07

2.29

1.83 x 0.76

360

227

6500

N/A

6.35

2.1

2.0

1.8 x 0.85

360

225

5000

N/A

7.0

3.4

2.6

6.7 x 2.28

180

1350

18000

**Alternative machines**

45AJ, SJ46AJ,  
HA16RTJ



2 RT<sup>4</sup> A

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

S45XCS,  
SJ45T+

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

45AJ, Z4525DJX,  
SJ46AJ, HA16RTJ

2 RT<sup>4</sup> A

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

Z4525DJX,  
Z45DJX, 45JSX

2 RT<sup>4</sup> A

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

HR21H

2 RT<sup>4</sup> A

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

TITAN40

2 RT<sup>4</sup> S


2 RT<sup>4</sup> S

2 RT<sup>4</sup> S

2 RT<sup>4</sup> S


0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS




**20.11**

**11.56**




**20.16**

**11.15**




**20.29**

**12.12**




**20.3**

**12.3**



**20.39**

**11.05**



**20.6**

**12.2**

**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.5

8.59

2.54

2.44

2.44 x 0.91

Continuous

454

8557

N/A

2.46

8.15

2.54

2.49

1.83 x 0.76

355

227

7756

2.49

N/A

8.82

2.56

2.44

1.83 x 0.91

180

227

10650

N/A

2.5

9.15

2.58

2.49

2.44 x 0.91

360

454-299†

11986

N/A

N/A

8.15

2.69

2.46

1.83 x 0.76

Continuous

227

10025 / 10765\*

N/A

N/A

8.8

2.51

2.42

1.83 x 0.8

Continuous

230

9600

N/A

## Alternative machines

60AJHCS, Z62,  
HA20RTJPRO

HR21H

60AJ,  
60AJX-P

SJ60AJ+

G60-R, HR21D,  
60AJX, Z62

G60X, HA260PX,  
HR21D

0345 745 0000

45






**Harness ON™**  
fitted on  
all BOOMS



\* Depending on load, angle of rotation and outrigger configuration.

\* Air filled / Foam filled





**Working  
height (m)**

**20.6**

**20.65**

**20.8**

**21.8**

**21.81**

**20.87**

**Horizontal  
outreach (m)**

**12.3**

**13.5**

**12.5**

**17.1**

**16.51**

**12.47**

Reach below ground

N/A

N/A

N/A

2.71

2.65

N/A

Closed length (m)

7.16

8.93

5.3

9.5

9.76

9.25

Closed height

(rails up) (m)

2.92

2.67

2.15

2.72

2.81

2.56

Closed width (m)

2.49

2.38

2.27

2.5

2.49

2.49

Platform size (m)

2.44 x 0.91

1.8 x 0.80

1.80 x 0.85

1.83 x 0.76

1.83 x 0.76

1.83 x 0.76

Rotation (°)

353

360

360

Continuous

Continuous

Continuous

Max SWL (kg) #

300

230

225

227

454-300†

227

Weight (kg)

8051

11710

6680

10102

11412

10766

Op width full (m)

N/A

N/A

N/A

N/A

N/A

2.49

**Alternative machines**

BT22HRT

M60J, HR21B

G65X, 66JX

HT23RTJ,  
SJ66T+, LGT22J,  
660SJHCS

0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.

JLG  
660  
SJHCS







JLG  
66JX

Skyjack  
SJ66T+

Dingli  
BA22ERT

Haulotte  
HT23RTJ

Dingli  
BT22HRT



**Working  
height (m)**

**Horizontal  
outreach (m)**

**22.1**

**22.12**

**22.19**

**22.21**

**22.5**

**22.51**

**17.41**

**17.3**

**17.38**

**12.72**

**18.3**

**17.28**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.8

10.01

2.58

2.49

2.44 x 0.91

Continuous

454-299†

13282

N/A

N/A

10.21

2.56

2.43

1.83 x 0.91

180

227

13500

N/A

3.0

10.4

2.59

2.44

1.83 x 0.91

360

454

12485

N/A

1.77

9.55

2.49

2.29

1.83 x 0.79

360

230

10100

N/A

4.0

10.4

2.7

2.47

2.44 x 0.91

Continuous

230

13400

N/A

N/A

10.16

2.65

2.5

2.44 x 0.91

Continuous

454

13200

N/A

**Alternative machines**

S65XC, HT23RTJ,  
SJ66T+, LGT22J

G65,  
G65X

S65XC, HT23RTJ,  
LGT22J, 660SJHCS


S65X, SJ66T+,  
LGT22J, 660SJHCS

S60FE

0345 745 0000

47

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.





**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)


Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)



**23.8**

**17.5**

2.3

10.6

2.79

2.49


2.44 x 0.9

Continuous

450

12300

N/A



**25.6**

**16.2**

N/A

12.0

2.71

2.4


1.8 x 0.8

360

230

15890

N/A



**25.6**

**18.29**

N/A

11.27

3.0

2.49


2.44 x 0.91

Continuous

227

17010

N/A



**26.3**

**15.9**

4.0

11.22

2.97

2.48


2.44 x 0.91

360

454-299†

17500

N/A



**26.3**

**15.74**

N/A

11.12

3.0

2.44


1.83 x 0.91

360

230

15600

N/A



**26.38**

**15.8**

3.0

11.13

3.0

2.49

1.83 x 0.91

Continuous

230

16110

N/A

## Alternative machines

0345 745 0000


**Harness ON™**  
fitted on  
all BOOMS

48




# Depending on load, angle of rotation and outrigger configuration.






**27.74**

**22.71**




**27.9**

**17.02**




**27.9**

**23.32**




**28.0**

**19.0**



**28.1**

**19.4**



**28.1**

**19.4**

**Working height (m)**

**Horizontal outreach (m)**

Reach below ground

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

2.69

12.37

2.8

2.49

1.83 x 0.76

Continuous

454-300†

17917

N/A

2.0

11.63

2.67

2.49

1.83 x 0.91

Continuous

340-227†

16965

N/A

2.89

12.4

2.8

2.5

1.83 x 0.76

Continuous

227

17236

2.5

N/A

9.28

2.7

2.49

2.4 x 0.9

360

280

14700

N/A

6.61

11.83

2.89

2.5

2.44 x 0.91

Continuous

250

18400

N/A

6.61

11.83

2.89

2.5

2.44 x 0.91

Continuous

250

18400

N/A

**Alternative machines**

860SJHCS  
BT28RT

Z80,  
80JX

860SJ

H800AJ,  
BA28HRT


HR28H,  
H800AJ

Z80  
80JX




0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS




# Depending on load, angle of rotation and outrigger configuration.






**28.21**

**22.78**



**28.21**

**22.86**




**28.6**

**21.3**



**28.6**

**21.9**



**30.3**

**23.0**

**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.2

12.19

3.05

2.5

2.44 x 0.91

Continuous

454-227†

17255

N/A

3.0

12.19

3.05

2.49

2.44 x 0.91

360

227

16511

2.5

N/A

11.66

2.87

2.5

2.44 x 0.91

Continuous

454

18400

N/A

N/A

11.66

2.87

2.5

2.44 x 0.91

Continuous

454

18400

N/A

N/A

12.3

2.87

2.5

2.44 x 0.91

Continuous

454

18900

N/A

## Alternative machines

S85XC,  
BT28RT



0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS

50

\* Depending on load, angle of rotation and outrigger configuration.



**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)


Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)



**31.8**

**21.3**

4.0

11.16

2.7

2.5


2.44 x 0.80

Continuous

250

20800

3.33



**38.73**

**22.86**

N/A

10.64

3.05

2.49


2.44 x 0.91

Continuous

450-230†

18500

3.81



**40.1**

**24.38**

2.69

12.19

3.05

2.49


2.44 x 0.91

360

454

20700

N/A



**40.1**

**19.25**

N/A

11.45

3.05

2.49


2.44 x 0.91

Continuous

450-227†

19958

3.81



**40.15**

**24.38**

N/A

14.25

3.07

2.49


2.44 x 0.91

Continuous

227

20248

3.35



**41.5**

**19.8**

N/A

12.6

N/A

2.5

2.44 x 0.8

360

230

23000

3.3

**Alternative machines**

1250AJP, Z135,  
ZX135

S125

1200SJP

ZX135,  
Z135

1200SJP,  
1350SJP

Z135,  
1250AJP

0345 745 0000

51

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.





**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)


Op width full (m)

**Alternative machines**

0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS

52



**41.5**

**20.1**

1.5

13.1

3.0

2.53

2.44 x 0.91


Continuous

230

23900

3.3

Z135,  
1250AJP



**43.15**

**27.43**

6.0

19.76

3.05

2.49

2.44 x 0.91


Continuous

454-230†

21747

3.94

1350SJP



**43.15**

**21.26**

5.87

12.93

3.07

2.46

2.44 x 0.91


Continuous

272

20366

3.94

ZX135,  
1250AJP



**43.15**

**21.26**

5.87

12.93

3.09

2.49

2.44 x 0.91


Continuous

272

20502

5.03

Z135,  
1250AJP



**43.3**

**24.38**

N/A

11.86

3.05

2.49

2.44 x 0.91


Continuous

450-230†

20400

3.81

Z135, 1200SJP,  
S125



**47.72**

**25.03**

3.0

18.82

3.05

2.49

2.44 x 0.91

360

454-227†

22000

3.81

SX150



# Depending on load, angle of rotation and outrigger configuration.

**Working  
height (m)**

**Horizontal  
outreach (m)**

Reach below ground

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)


Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)



**48.02**

**24.38**

0.91

16.18

3.05

2.49


2.44 x 0.91

Continuous

340

23236

5.03



**48.15**

**23.55**

6.1

15.1

3.1

2.5

0.91 x 2.44 (5\*)

Continuous

450-270†

26127

5.0



**56.86**

**24.38**

N/A

14.33

3.05

2.49


2.44 x 0.91

Continuous

340

25095

5.03



**58.56**

**24.38**

1.47

14.57

3.05

2.49

2.44 x 0.91

Continuous

454-227†

27170

5.03

**Alternative machines**

**SX180**

**1850SJP**

**SX180**

0345 745 0000

53

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.





# Van mounts

With working heights of between 12m and 17m, our range of van mounted platforms are available to hire on an operated or self-drive basis.

For more information, advice, training and to hire from our range of **van mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



# VAN MOUNTS

GSR  
VT125K




Versalift  
VT12E

VTE12E

VR13E

GSR  
VI14GS

GSR  
VM14GS



**Working height (m)**

**12.9**

**13.0**

**13.5**

**13.7**

**13.75**

**13.75**

**Horizontal outreach (m)**

**7.3**

**7.0**

**8.0**

**8.5**

**7.8**

**7.8**

Closed length (m)

6.54

6.74

6.77

6.88

7.0

7.2

Closed height (rails up) (m)

3.8

3.15

3.4

3.3

3.45

3.45

Closed width (m)

2.2

2.45

2.45

2.45

2.2

2.2

Platform size (m)

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

SWL (kg) #

200

200

200

230

250

250

Weight (kg)

3500

3500

4250

3500

5000

5000

Op width full (m)

2.45

2.45

2.45

2.45

2.25

2.25

Min op width (m)

2.45

2.45

2.45

2.45

2.25

2.25

Overall spare payload (vans) (kg)

200

200

500

290

900

900

## Alternative machines

VT12E, VR13KL

VT125K, VR13KL

N/A

VR13KL, V112E  
VT125K

V14E, VM14GS

V14E, VI14GS



0345 745 0000

55



# Depending on load, angle of rotation and outrigger configuration.






**Working height (m)**

**Horizontal outreach (m)**

Closed length (m)  
Closed height (rails up) (m)  
Closed width (m)  
Platform size (m)  
SWL (kg) #  
Weight (kg)  
Op width full (m)  
Min op width (m)  
Overall spare payload (vans) (kg)



**13.8**

**8.4**

7.0

3.6

2.45

1.2 x 0.7

230

3500

2.45

2.45

2.45

395



**13.8**

**8.0**

6.51

3.3

2.2

1.1 x 0.6

200-120†

3500

2.5

2.5

200



**14.2**

**7.3**

7.34

3.8

2.2

1.0 x 0.6


200

5200

2.25

2.25

800



**16.5**

**7.3**

8.22

4.0

2.2

1.0 x 0.6


200

6500

2.3

2.3

1000



**17.0**

**10.5**

8.47

3.7

2.45

1.0 x 0.6

230

7000

2.45

2.45

2200

## Alternative machines

VT12E, VR13KL, VR13E



VT12E, VT125K



VI14GS, VM14GS



0345 745 0000









# Truck mounts

Our truck mounted cherry pickers offer flexible access from 13m to 90m, with both self-drive and operated hire options available.

For more information, advice, training and to hire from our wide range of **truck mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



# TRUCK MOUNTS

Versalift  
**T1135EX**

GSR  
**T14GS**

GSR  
**T17GS**


CTE  
**T20CJHV**

GSR  
**T20GS**

**Working height (m)**

**Horizontal outreach (m)**

Reach below ground  
Max horiz outreach\* (m)  
Closed length (m)  
Closed height (m)  
Closed width (m)  
Platform size (m)  
SWL (kg) #  
Weight (kg)  
Op width full (m)  
Min op width (m)  
Point load front/rear



**13.3**

**6.1**


N/A  
N/A  
4.7  
2.6  
2.0  
1.0 x 0.6  
230  
3500  
2.4  
2.4  
20kN / 20kN



**14.0**

**8.0**


N/A  
N/A  
7.2  
2.95  
2.1  
1.4 x 0.7  
200  
3500  
2.4  
2.4  
28kN / 28kN



**17.1**

**9.5**


N/A  
6.7  
7.1  
2.95  
2.2  
1.4 x 0.7  
250  
3500  
2.4  
2.4  
28kN / 28kN



**20.0**

**12.0**

N/A  
N/A  
7.59  
2.96  
2.25  
1.4 x 0.7  
300-100†  
3500  
3.68  
2.33  
20kN / 30kN



**20.0**

**8.2**

N/A  
N/A  
7.46  
2.77  
2.1  
1.4 x 0.7  
280  
3500  
2.3  
2.3  
25kN / 18kN

## Alternative machines



0345 745 0000

59



## T14C



## T18AS



## T20M



## T20C



\* Depending on load, angle of rotation and outrigger configuration.

\* With full safe working load



# TRUCK MOUNTS






Multitel  
**T20M**

GSR  
**T220GSR**

GSR  
**T22GS**

GSR  
**T22GSH**

CTE  
**T23C**



**Working height (m)**

**20.0**

**21.75**

**22.0**

**22.0**

**23.0**

**Horizontal outreach (m)**

**11.0**

**11.4**

**17.7**

**17.7**

**10.0**

Reach below ground

2.0

1.0

N/A

N/A

N/A

Max horiz outreach\* (m)

8.6

8.45

N/A

N/A

10.0

Closed length (m)

7.65

7.6

8.7

8.7

7.48

Closed height (m)

3.0

2.76

3.55

3.55

2.8

Closed width (m)

2.1

2.25

2.5

2.5

2.25

Platform size (m)

1.40 x 0.70

1.4 x 0.7

1.8 x 0.8

1.8 x 0.8

1.4 x 0.7

SWL (kg) #

250-80†

250

280

280

250

Weight (kg)

3500

3500

7500

8200

3500

Op width full (m)

3.4

2.5

4.5

4.5

3.92

Min op width (m)

2.5

2.5

2.5

2.5

N/A

Point load front/rear

30kN / 19kN

22.5kN / 22kN

60kN / 60kN

60kN / 60kN

28kN / 28kN

**Alternative machines**

**T20C**



**T22GS**



0345 745 0000

60

\* With full safe working load

# Depending on load, angle of rotation and outrigger configuration.

# TRUCK MOUNTS

Ruthmann  
**T260R**


GSR  
**T26GS**

Ruthmann  
**T28RX**

Ruthmann  
**T33R**


Ruthmann  
**T33RH**

Bronto  
**T35BEM**




**26.0**

**17.0**




**26.0**

**14.0**




**28.0**

**21.3**




**33.0**

**21.2**



**33.0**

**21.2**



**35.0**

**25.0**

**Working height (m)**

**Horizontal outreach (m)**

Reach below ground

Max horiz outreach\* (m)

Closed length (m)

Closed height (m)

Closed width (m)

Platform size (m)

SWL (kg) #

Weight (kg)

Op width full (m)

Min op width (m)

Point load front/rear

N/A

17.0

7.86

3.05

2.3

1.4 x 0.7

250-100†

3500

3.85

2.34

32kN / 25kN

N/A

14.0

7.8

3.6

2.5

1.4 x 0.7

280

7500

3.5

3.5

60kN / 60kN

N/A

16.0

8.12

3.8

2.5

1.7 x 0.86

320-100†

11000

3.8

2.5

110kN / 50kN

N/A

16.5

8.7

3.56

2.5

1.7 x 0.86

320-100†

7490

5.32

2.53

56kN / 42kN

N/A

16.5

8.7

3.56

2.5

1.7 x 0.86

320-100†

8600

5.32

2.53

56kN / 42kN

1.0

28.6

10.2

3.7

2.5

2.4 x 0.9

450-120†

18000

5.9

2.5

120kN / 120kN

**Alternative machines**



0345 745 0000

61



**T26C**



**T26CX**



**T33RH**









**T33R**



\* Depending on load, angle of rotation and outrigger configuration.

\* With full safe working load





**Working height (m)**

**37.0**

**38.0**

**44.0**

**48.0**

**49.5**

**56.0**

**Horizontal outreach (m)**

**30.0**

**25.3**

**24.0**

**28.0**

**35.0**

**37.3**

Reach below ground

6.0

6.5

5.0

13.5

11.0

9.0

Max horiz outreach\* (m)

21.0

21.0

21.0

22.0

25.0

32.0

Closed length (m)

8.9

10.0

10.0

10.4

12.0

11.9

Closed height (m)

3.9

3.7

3.8

4.0

4.0

3.7

Closed width (m)

2.55

2.5

2.5

2.55

2.5

2.5

Platform size (m)

2.3 (3.6) x 0.90

2.3 (3.7) x 1.05

2.4 (3.7) x 1.0

2.15 (3.8) x 1.05

2.20 (3.7) x 0.90

2.4 (3.7) x 1.0

SWL (kg) #

500-100†

600-120†

600-120†

600-100†

600-120†

600-200†

Weight (kg)

18000

18000

18000

17600

26000

26000

Op width full (m)

6.4

6.2

6.2

6.3

8.0

9.0

Min op width (m)

2.6

2.8

2.8

2.55

2.8

3.0

Point load front/rear

170kN / 140kN

150kN / 150kN

150kN / 150kN

160kN / 160kN

190kN / 190kN

180kN / 180kN

**Alternative machines**

**T38B**



**T37B, T37R**



**T50JB**



**T48P, T56B**



**T50JB**






0345 745 0000

# TRUCK MOUNTS

Bronto  
**T70B**

Bronto  
**T70B-XR**

Bronto  
**T90B**



**Working height (m)**

**70.0**

**70.0**

**90.0**

**Horizontal outreach (m)**

**34.8**

**34.8**

**31.0**

Reach below ground

6.0

11.0

12.0

Max horiz outreach\* (m)

30.0

30.0

29.0

Closed length (m)

12.5

12.0

15.6

Closed height (m)

4.2

3.9

4.0

Closed width (m)

2.5

2.4

2.5

Platform size (m)

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

SWL (kg) #

600-120†

600-200†

600-400†

Weight (kg)

36000

36000

48000

Op width full (m)

8.0

8.0

7.0

Min op width (m)

3.2

3.2

N/A

Point load front/rear

255kN / 255kN

230kN / 230kN

270kN / 270kN

**Alternative machines**

**T90B**

**T70B**

**T70B**



0345 745 0000

63



\* With full safe working load





# Tracked booms

Tracked boom lifts are fitted with an articulating or telescopic boom, mounted on tracks to reduce ground pressure. They are fitted with outriggers to add stability, making them perfect for difficult access challenges. We offer both self-drive and operated hire options with working heights of up to 31m and horizontal outreach of up to 14.7m.

For more information, advice, training and to hire from our wide range of **tracked booms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.





# TRACKED BOOMS

Hinowa  
**TB14HB**

Hinowa  
**TB14HE**








Hinowa  
**TB15HB**

Hinowa  
**TB15HE**



Hinowa  
**TB17HB**



**Working  
height (m)**

**14.0**

**14.0**

**15.4**

**15.4**

**17.06**

**Horizontal  
outreach (m)**

**7.0**

**7.0**

**6.6**

**6.6**

**7.5**

Closed length (m)

4.06

4.06

4.02

4.02

4.52

Closed height  
(rails up) (m)

1.99

1.99

1.99

1.99

2.0

Closed width (m)

0.78

0.78

0.75

0.75

0.79

Platform size (m)

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg) #

200-120†

200-120†

230

230

230

Weight (kg)

1750

1750

1950

1950

2280

Outrigger footprint (m)

2.7 x 2.7

2.7 x 2.7

2.8 x 2.8

2.8 x 2.8

2.88 x 2.89

Min op width (m)

2.7

2.7

2.8

2.8

2.88

## Alternative machines

TB14HE, TB17HE  
TB17HB

TB14HB, TB17HE  
TB17HB

TB15HE, TB17HE  
TB17HB

TB15HB, TB17HE  
TB17HB

TB17HE, TB20HE  
TB20HB

0345 745 0000






65

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.





**Working  
height (m)**

**17.06**

**17.6**

**20.1**

**20.1**

**20.1**

**Horizontal  
outreach (m)**

**7.5**

**9.2**

**9.7**

**9.7**

**9.85**

Closed length (m)

4.52

5.21

5.01

5.01

5.01

Closed height  
(rails up) (m)

2.0

1.95

1.99

1.99

1.99

Closed width (m)

0.79

0.78

0.79

0.79

0.79

Platform size (m)

1.33 x 0.69

0.70 x 1.30

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg) #

230

200

230

230

230

Weight (kg)

2280

2350

2880

2880

2880

Outrigger footprint (m)

2.88 x 2.89

3.1 x 3.1

2.92 x 2.92

2.92 x 2.92

2.92 x 2.92

Min op width (m)

2.88

3.1

2.92

2.92

2.92

**Alternative machines**

TB17HB, TB20HE  
TB20HB

TB20HB

TB20HE, TB26HE  
TB26HB

TB20HB, TB26HE  
TB26HB

TB20HE, TB26HE  
TB26HB, TB20HB

0345 745 0000

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.


# TRACKED BOOMS

Hinowa  
**TB26HB**

Hinowa  
**TB26HE**


Multitel  
**TB30MB**

Teupen  
**TB31TB**




**25.7**

**13.6**




**25.7**

**13.6**



**30.0**

**14.0**



**31.0**

**14.7**

**Working  
height (m)**

**Horizontal  
outreach (m)**

Closed length (m)

Closed height  
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Outrigger footprint (m)

Min op width (m)

6.34

1.98

0.99

1.33 x 0.69

360

230

4415

4.07 x 3.97

3.97

6.34

1.98

0.99

1.33 x 0.69

360

230

4415

4.07 x 3.97

3.97

6.65

2.3

1.6

0.70 x 1.60

400

400-120†

5600

6.4 x 4.2

3.3

7.23

1.98

1.58

1.20 x 0.80

360

250-80†

4350

5.45 x 5.15

2.75

**Alternative machines**

TB26HE

TB26HB

TB30TB

TB26HB  
TB26HE



0345 745 0000

67

**Harness ON™**  
fitted on  
all BOOMS



# Depending on load, angle of rotation and outrigger configuration.





# Telehandlers

Ideal for lifting products and equipment up to heights of 17.5m, our range of telehandlers provide safe working solutions. The range includes a lifting capacity of up to 4000kg.

For more information, advice, training and to hire from our range of **telehandlers**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.




# TELE- HANDLERS

Manitou  
MT625H

Manitou  
MT1033  
EASY


Manitou  
MT1440  
EASY

Manitou  
MT1840  
EASY




**5.85**

**3.4**




**9.98**

**7.15**



**13.53**

**9.46**



**17.55**

**13.08**

**Working  
height (m)**

**Horizontal  
outreach (m)**

Closed length (m)

Closed height (m)

Closed width (m)

Max lift cap (kg)

Max lift cap  
(with full reach) (kg)

Weight  
(with forks) (kg)

Turn radius (m)

3.83

1.92

1.81

2500

800

4800

3.31

4.93

2.3

2.33

3300

1000

7790

3.8

6.13

2.45

2.36

4000

1500

10900

3.94

6.15

2.45

2.36

4000

850

11710

3.94

**Alternative machines**



0345 745 0000



RT<sup>4</sup>



RT<sup>4</sup>



RT<sup>4</sup>



RT<sup>4</sup>





# How to use this guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height. The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on **0345 745 0000**

## Product Type

### Working Envelope

Shows approximate area of working space provided by the product.

### Working Height / Horizontal Outreach

### Specification

These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.

### Alternative Machines

Alternative or similar machines.

| BOOMS                   | AJC 660 SJHCS                | AJC 66JX    | Skysc SJ66T+                   | Single BA22ERT | Skysc HT23RTJ                 | Single BT23HRT |
|-------------------------|------------------------------|-------------|--------------------------------|----------------|-------------------------------|----------------|
|                         |                              |             |                                |                |                               |                |
| Working height (m)      | 22.1                         | 22.12       | 22.19                          | 22.21          | 22.5                          | 22.51          |
| Horizontal outreach (m) | 17.41                        | 17.3        | 17.38                          | 12.72          | 18.3                          | 17.28          |
| Reach below ground      | 1.8                          | N/A         | 3.0                            | 1.77           | 4.0                           | N/A            |
| Closed length (m)       | 10.21                        | N/A         | 10.4                           | 9.55           | 10.4                          | 10.16          |
| Closed height (m)       | 2.58                         | 2.56        | 2.59                           | 2.55           | 2.7                           | 2.65           |
| Platform width (m)      | 2.49                         | 2.48        | 2.44                           | 2.33           | 2.47                          | 2.5            |
| Platform area (m²)      | 2.44 x 0.91                  | 1.85 x 0.91 | 2.41 x 0.91                    | 1.83 x 0.79    | 2.44 x 0.91                   | 2.44 x 0.91    |
| Rotation (°)            | Continuous                   | 180         | 360                            | Continuous     | Continuous                    | Continuous     |
| Max SWL (kg)            | 454                          | 227         | 454                            | 230            | 230                           | 454            |
| Weight (kg)             | 13262                        | 13500       | 12585                          | 10100          | 13400                         | 13200          |
| Op. width full (m)      | N/A                          | N/A         | N/A                            | N/A            | N/A                           | N/A            |
| Alternative machines    | SS54C HT23RTJ, SJBRT+, LG72J | GSX         | SS54C HT23RTJ, LG72J, SS54JHCS |                | SS54C SJBRT+, LG72J, SS54JHCS | SS54C          |
| 0345 745 0000           |                              |             |                                |                |                               |                |

## Product Code

Unique reference number.  
(Please note this will not necessarily correspond with the original manufacturer's model number or product code)

## Product Type (icon)

Indicates powered access classification, e.g. low level, scissor lift or boom lift.

## Key

These symbols indicate standard features and optional extras available to hire with the platform.  
See below for key table.

## Electric / Hybrid

Electric products can be identified by green ELECTRIC product badge.



Hybrid products have jade HYBRID badge.





# KEY

0345 745 0000



Battery power



Diesel power



Lithium battery



Hybrid power



Dual fuel option



Gas power option



Rough terrain (2 wheel drive)



Rough terrain (4 wheel drive)



Non-marking tyres

## Standard features



IPAF 1a licence type



IPAF 1b licence type



IPAF 3a licence type



IPAF 3b licence type



IPAF PAV licence type



Tracked



Mast boom



Articulating boom



Straight telescopic boom



Outrigger legs



Maximum people in cage\*



Push around vehicles



Operator powered



Indoor use only



Self drive



JIB rotation



C1 driving licence type



B driving licence type

## Optional extras



SkySiren®



SkySiren® PCS™



SkySentry™



SkyRak®



SkyRakPlus®



SkyRakBoom®



SkyTel™



SkyRakEdge™



SkyShield



SkyScreen™



MHA Material Handling Attachments



Power to platform



Generator



Camera pod



Circular camera cage



Wendy lighting frame



SkyRakMulti™



# Call us today

# 0345 745 0000



Join us on  
[LinkedIn.com/company/Nationwide-Platforms](https://www.linkedin.com/company/nationwide-platforms)



Like us on  
[Facebook.com/NationwidePlatforms](https://www.facebook.com/NationwidePlatforms)



Follow us on X  
[@NWPlatforms](https://twitter.com/NWPlatforms)



Watch our latest videos on  
[YouTube.com/NationwidePlatforms](https://www.youtube.com/NationwidePlatforms)







**0345 745 0000**  
[nationwideplatforms.co.uk](https://nationwideplatforms.co.uk)

**Nationwide Platforms**  
15 Midland Court,  
Central Park,  
Lutterworth,  
Leicestershire,  
LE17 4PN

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.