



Look out for our electric and hybrid products to help you make greener choices



Powered Access Selection Guide

2024 digest edition



0345 745 0000
nationwideplatforms.co.uk

 **Nationwide
Platforms**
A **LOXAM** Company

Welcome

Inside you'll find all the information you need to begin working safely and effectively at height.

0345 745 0000
nationwideplatforms.co.uk



Contents

Welcome	2-3
my.NationwidePlatforms	4-5
Service and support	6-7
The environment	8-9
Training / National coverage	10-11
Safety innovations	12-13
Harness ON™	14-15
Low level	16-21
Scissors	22-33
Booms	34-49
Van mounts	50-51
Truck mounts	52-57
Tracked booms	58-60
Telehandlers	62-63



Welcome to Nationwide Platforms

Your safety, is absolutely our priority.

As the UK's leading specialist provider of Powered Access rental equipment, you can trust us to support your every working at height need. No matter what your requirement is, and no matter where you are working, we can provide the right solution.

Our award winning BlueSky Solutions and Training division offer our customers access to the latest and safest ways to work and through long standing partnerships with our manufacturers, we will always provide equipment that leads the way to a safer industry.



We have national coverage and the largest and broadest fleet. Whether you're working in Construction, Warehouse & Distribution, Aviation, Facilities Management, Industrial Services, Telecoms or Media, you can confidently choose us to be your Powered Access supplier.

Committed to building a more sustainable future, we continually invest in electric and hybrid equipment and we've also introduced HVO (Hydrotreated Vegetable Oil) that provides you an alternative to white diesel.

We've recognised that we can make working with us easier through the introduction of many digital solutions, from Visual Remote Assistance to quickly diagnose any technical problems you may have, through to my.NationwidePlatforms which gives you 24/7 access to manage your account online.

0345 745 0000
nationwideplatforms.co.uk



**YOUR
SAFETY
OUR
PRIORITY**



Introducing my.NationwidePlatforms

Our online account management service that gives you access to manage your account at the touch of a button, 24/7.

Through a suite of online tools, you can easily monitor and maintain your account at a time that suits you.

- **my.Hires** – enables you to place hires, extend the hire period or off-hire for collection, see previous orders and proof of delivery & collection.
- **my.Training** – you can easily book courses, manage & update the delegate details right up to the training day.
- **my.Finance** – you can view, print and query invoices and see your current statement of account.
- **my.Admin** – manage access to the different features and capabilities of the platform where the account needs multiple users.



HireTracker

We've recently launched our HireTracker service which will keep you up-to-date with each stage of your delivery and collection. You can choose who gets the notification whether that is the order placer or the site contact taking delivery, you're given a three hour delivery window and by following the link in the email or SMS, you can track the progress to your delivery address.

What3Words

What3Words helps with the accuracy of deliveries and collections, each 3m² location on the planet has its own unique What3Words reference, making it perfect for hard-to-find sites. Remember to give us your unique reference when you place your next hire.




Register now at

my.NationwidePlatforms.co.uk



0345 745 0000

nationwideplatforms.co.uk

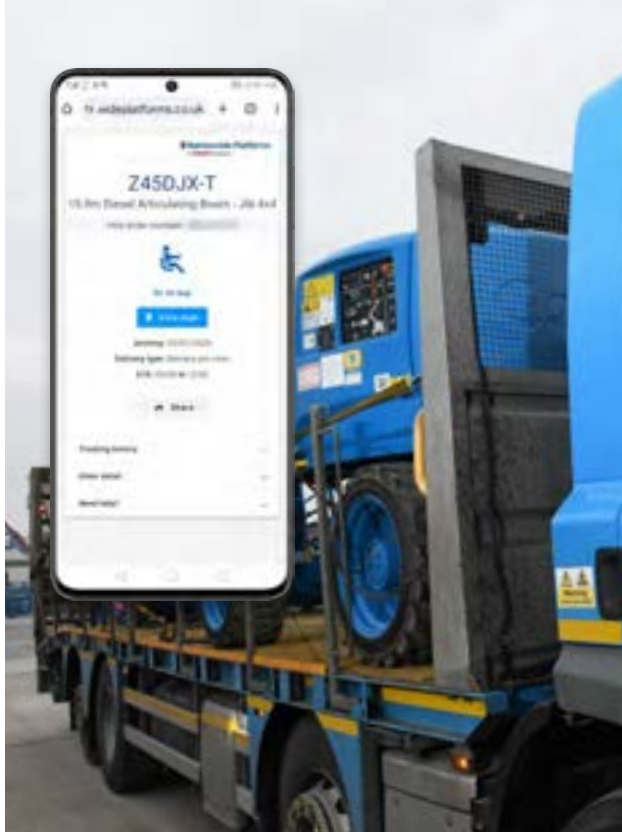

Service and support

Getting you back on track when things go wrong

Through the launch of Visual Remote Assistance (VRA) we are often able to fix some of the common faults or user errors without the need to despatch an engineer - getting you back to work much quicker.

The service is powered through a video call enabling our skilled engineers on the other end of the call to see the machine, diagnose the issue and in many cases resolve the problem. This reduces the need for our engineers to travel to site and frees them up to support other customers who need our help.

To speak to our **Technical Services Team**, call and select option 4

 **0345 745 0000**
nationwideplatforms.co.uk



All the data at the tips of your fingers

With Telematics now fitted to more than 90% of our fleet, the benefits are invaluable. You can:

- Prevent unauthorised use
- Track machine locations on-site
- Set up geo-fencing to manage movement on-site
- Battery management and low battery alerts
- Gain an insight into your operator's behaviours and work practices on-site
- Manage your machines on-site and your sub-contractors
- See the machine utilisation

Speak to us about how
Telematics can support you.

 **0345 745 0000**
nationwideplatforms.co.uk



The environment

Helping you to make greener choices

Over the last few years we have focused on the many ways we have been able to make a difference and support our customers' commitments to building a more sustainable future.

Green alternatives

More than half of our fleet is either electric, hybrid or manual push-around machines. You can reach up to 28m with one of our hybrid MEWPs and 22m by electric.

We've made it really easy for you to pick out the greener alternatives in this guide, look out for one of these icons:



Lowering emissions

For some of our machines the electric and hybrid technology just isn't advanced enough yet, where this is the case, we invest in lowering emissions with EU Standard Stage V compliant engines.

Electric / Hybrid

Hybrid products have a jade **HYBRID** badge.

Electric products can be identified by a green **ELECTRIC** product badge.

BOOMS	Genie Z45DJXC	Genie Z45FES	Genie Z45BJ	Genie Z45EJ	Haulotte HA16PX	Haulotte HA16RTJ
						
Working height (m)	15.86	15.92	15.94	15.94	16.0	16.0



Renewable Diesel


Where only a diesel machine will do the job, we now offer Hydrotreated Vegetable Oil (HVO), also known as Renewable Diesel, as an alternative to white diesel. All our diesel MEWPs can be operated using HVO.

Green deliveries

Our delivery fleet are all Euro VI compliant and recently our first FM Electric Volvo 4x2 tractor units hit the roads, enabling us to make deliveries and collections with low or zero tail pipe emissions.

To find out about our
Greener product range, call today.

 **0345 745 0000**
nationwideplatforms.co.uk

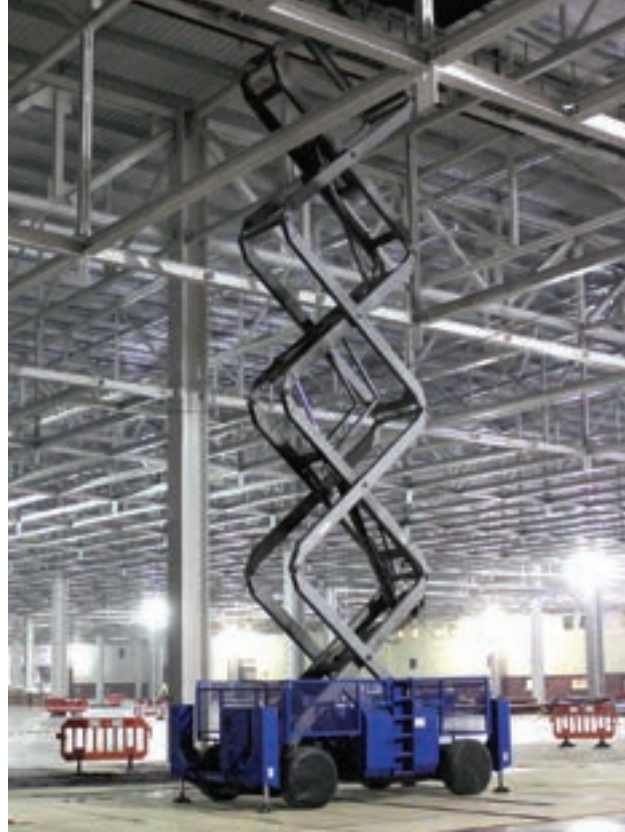

Training

Safety starts with the right training

As Europe's market leading Powered Access Training company, we offer a range of courses backed by some of the leading trade bodies including IPAF, PASMA, IOSH and the Ladder Association.

With 29 training locations across the UK, our expert training instructors train more than 22,000 delegates each year, and we can even arrange training on your site if that is more convenient.



To find out about our **Training**, or to book a course, call and select option 3

0345 745 0000
nationwideplatforms.co.uk



IPAF Operator Courses

1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training



National coverage


Supporting you at every height

With a fleet of more than 13,500 platforms available to hire across the UK, you can be sure that your perfect solution is never too far away.

Visit us at one of our 31 depots.

To find your nearest **Depot**, scan the QR code or call us today.

 **0345 745 0000**
nationwideplatforms.co.uk

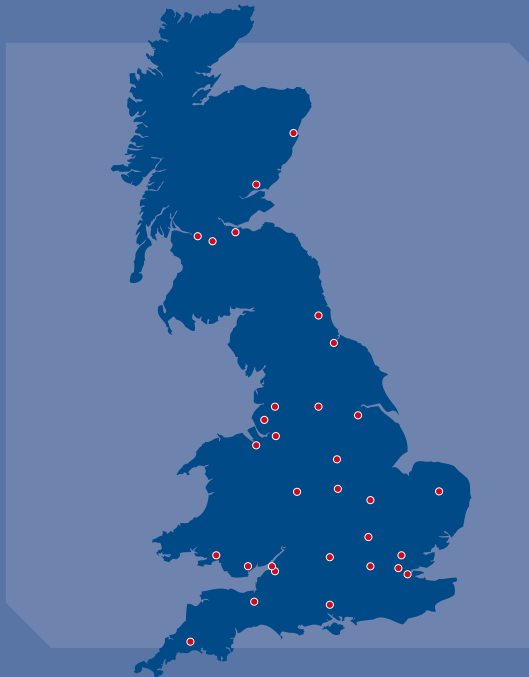

Safety innovations

Introducing BlueSky Solutions

Our research and development team at Nationwide Platforms believe in driving change in the industry through innovations and bespoke solutions to improve safety and tackle key causes of harm or fatality.

Our innovations are centred around preventing accidents and increasing efficiency:

- Avoidance of Entrapment through secondary guarding and intelligent secondary guarding.
- Telemetry data and technology preventing unauthorised use of a platform and providing dashboard data and alerts to make managing a site more efficient and effective.
- Material Handling Attachments to reduce the risk of dropped objects and manual lifting.



SkySiren[®]




SkySiren[®]
PCS[™]



 SkyRak®

 SkyRakPlus®

 SkyRakBoom®

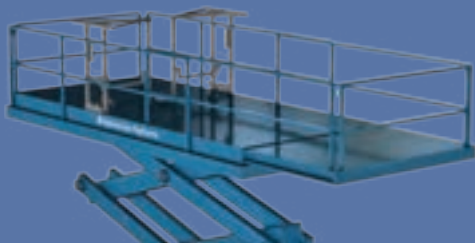

SkySentry™



Harness ON™



To find out about our
Safety innovations, call today.

 **0345 745 0000**
nationwideplatforms.co.uk



Harness ON™

A simple, unobtrusive & compliant device



A step change in safe working at height

Harness ON™ is an intelligent anchor point that stops the MEWP's operation until the operator attaches their harness carabiner.

Harness ON is permanently shackled to the MEWP's anchor point and wired electronically into the MEWP's function controls.

Once the carabiner is clipped onto Harness ON, an electronic signal tells the MEWP that operation is now safe and allows function until the carabiner is finally unclipped.



To find out more,
scan the QR code



 **Nationwide
Platforms**
A **LOXAM** Company



Low level

Our low level platforms offer access up to 8m and safe working loads up to 250kg. Suitable for indoor and outdoor use, our low level access platforms deliver compact access and are a safe alternative to ladders and towers for a variety of uses.

For more information, advice, training and to hire from our wide range of **low level platforms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



LOW LEVEL






Power Towers
PECOLIFT

JLG
ECO-WR

Power Towers
NANO

Power Towers
NANOSP

Power Towers
NANOSP+



3.5

4.2

4.5

4.5

4.5

Working height (m)

Closed length (m)
Closed height (m)
Closed width (m)
Platform size (m)
Platform length (deck extended) (m)
Max SWL (kg)
Weight (kg)

0.98

1.55

0.75

0.72 x 0.60

N/A

150

180

1.28

1.94

0.95

0.85 x 0.64

N/A

150

335

1.195

1.56

0.75

1.0 x 0.73

N/A

200

285

1.2

1.59

0.75

1.0 x 0.73

1.5

200

506

1.2

1.59

0.75

1.0 x 0.73

2.0

200

550

Alternative machines

NANO



NANOSP



**NANO
NANOSP+**



**NANO
NANOSP**




0345 745 0000






Bravi
**LEONARDO
-WD**




4.9

Popup
POPUP




4.95

Power Towers
**POWER
TOWER**




5.1

Genie
GR12



5.58

Skyjack
SJ12



5.65

Working height (m)

Closed length (m)	1.2	1.31	1.6	1.35	1.37
Closed height (m)	1.72	1.75	1.92	1.79	1.79
Closed width (m)	0.76	0.76	0.78	0.76	0.77
Platform size (m)	1.04 x 0.63	1.04 x 0.52	1.52 x 0.65	0.89 x 0.75	0.93 x 0.69
Platform length (deck extended) (m)	1.7	N/A	N/A	1.35	N/A
Max SWL (kg)	180	240	250	227	227
Weight (kg)	560	394	342	862	863

Alternative machines



0345 745 0000

Power Tower



NANO, NANO SP, POPUP



SJ12




GR12




LOW LEVEL

Skyjack
SJ12E




5.66

Genie
GR15




6.62

Dingli
AMWP7-8100L



6.7

Skyjack
SJ16E



6.72

Working height (m)

Closed length (m)
Closed height (m)
Closed width (m)
Platform size (m)
Platform length (deck extended) (m)
Max SWL (kg)
Weight (kg)

1.37	1.45	1.45	1.37
1.88	1.79	1.99	1.88
0.77	0.76	0.76	0.77
0.91 x 0.69	0.94 x 0.75	1.0 x 0.76	0.91 x 0.69
N/A	1.4	1.5	N/A
227	227	200	227
913	994	990	931

Alternative machines

GR12



SJ16
AMWP7-8100L



SJ16
GR15





GR15
AMWP7-8100L



0345 745 0000





Working height (m)

6.75

7.85

8.0

Closed length (m)

1.37

1.35

1.39

Closed height (m)

1.79

1.98

1.99

Closed width (m)

0.77

0.8

0.8

Platform size (m)

0.85 x 0.69

0.89 x 0.75

0.71 x 0.75

Platform length (deck extended) (m)

N/A

1.4

1.26

Max SWL (kg)

227

159

159

Weight (kg)

971

1264

1285

Alternative machines

GR15
AMWP7-8100L

GR15
3219, GS20

GR20





Scissor lifts

Providing access up to 33.5m, our wide range of scissor lifts offer versatile access both indoors and outdoors, with electric, hybrid, and diesel options available.

For more information, advice, training and to hire from our wide range of **scissor lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



SCISSORS

Skyjack
SJ3219







Dingli
0807AC

Skyjack
3219

Genie
GS1932

Genie
GS20

Dingli
0808AC



Working height (m)

7.65

7.8

7.8

7.8

7.92

8.0

Closed length (m)

1.55

1.86

1.78

1.82

2.45

2.48

Closed height (m)

2.13

2.15

2.11

2.11

2.1

2.23

Closed height (rails lowered) (m)

1.78

1.83

1.64

1.76

1.75

1.87

Closed width (m)

0.81

0.76

0.81

0.81

0.81

0.83

Platform size (m)

1.55 x 0.66

1.67 x 0.74

1.63 x 0.71

1.64 x 0.74

2.21 x 0.70

2.27 x 0.81

Platform length (deck extended) (m)

2.46

2.57

2.53

2.54

3.2

3.17

Max SWL (kg)

227

230

227

227

363

380

Weight (kg)

1476

1630

1312

1503

1559

2160

Alternative machines

OPT8, 3219,
GS1932

SJ3219,
GS1932, 3219

GS1932, GS20,
0807AC

3219, 3220,
GS20

3220,
COM8

3220, COM8
GS20



0345 745 0000



SCISSORS

Skyjack
3220







Skyjack
SJ3220

Haulotte
COM8

Genie
GS26

Skyjack
SJ4726

Skyjack
4626



Working height (m)

8.1

8.1

8.2

9.75

9.82

9.9

Closed length (m)

2.32

2.32

2.49

2.45

2.32

2.31

Closed height (m)

2.08

2.1

2.0

2.17

2.1

2.15

Closed height (rails lowered) (m)

1.73

1.75

1.13

1.99

1.72

1.79

Closed width (m)

0.81

0.84

0.81

1.17

1.19

1.17

Platform size (m)

2.13 x 0.71

2.11 x 0.71

2.31 x 0.81

2.21 x 0.94

2.11 x 1.07

2.11 x 1.07

Platform length (deck extended) (m)

3.04

3.23

3.23

3.2

3.33

3.01

Max SWL (kg)

408

408

350

454

454

454

Weight (kg)

1594

1967

1655

2478

2135

2130

Alternative machines

GS20
2030ES

COM8, GS20
3220

GS2632
3226

COM10
4626

GS26



0345 745 0000



SCISSORS

Genie
GS2669RT







Skyjack
6826D

Skyjack
3226

Genie
GS2632

Skyjack
SJ3226

Haulotte
COM10N



Working height (m)

9.9

9.92

9.92

9.92

9.92

10.0

Closed length (m)

3.12

3.12

2.32

2.44

2.32

2.49

Closed height (m)

2.59

2.37

2.15

2.26

2.29

2.18

Closed height (rails lowered) (m)

1.92

1.61

1.91

1.91

1.93

1.32

Closed width (m)

1.75

1.72

0.81

0.81

0.84

0.81

Platform size (m)

2.79 x 1.6

2.44 x 1.42

2.13 x 0.71

2.26 x 0.79

2.11 x 0.71

2.31 x 0.81

Platform length (deck extended) (m)

4.5

3.94

3.23

3.18

3.23

3.23

Max SWL (kg)

680

567

227

227

227

230

Weight (kg)

3768

3305

1890

1956

2014

2190

Alternative machines

6826D,
GS26D-O

GS26D,
SR0818D

GS2632

2630,
3226

GS2632, 3226,
COM10N



0345 745 0000



Haulotte
COM10







Haulotte
COM10DX

Skyjack
SJ4732

Skyjack
4632

Genie
GS32

Skyjack
6832D



Working height (m)

10.15

10.3

11.65

11.75

11.75

11.75

Closed length (m)

2.31

3.17

2.32

2.31

2.43

3.35

Closed height (m)

2.14

2.44

2.39

2.24

2.3

2.51

Closed height (rails lowered) (m)

1.28

1.59

1.99

1.88

1.8

1.75

Closed width (m)

1.2

1.78

1.19

1.17

1.17

1.76

Platform size (m)

2.31 x 1.2

2.45 x 1.45

2.11 x 1.07

2.11 x 1.07

2.26 x 1.16

2.44 x 1.42

Platform length (deck extended) (m)

3.23

3.7

3.33

3.01

3.25

4.11

Max SWL (kg)

450

565

318

317

318

454

Weight (kg)

2330

3520

2571

2300

2796

3685

Alternative machines

GS2632, 3226
COM10N

GS26D,
6826D

4632,
GS32

GS32

3246

GS32D,
SR1018D



0345 745 0000

SCISSORS

Skyjack
6832RTE







Genie
GS3369RT

Haulotte
COM12

Haulotte
COM12DX

Genie
GS3390RT

Genie
GS3390G



Working height (m)

11.75

11.96

12.0

12.06

12.06

12.06

Closed length (m)

3.35

3.12

2.49

3.17

4.88

4.88

Closed height (m)

2.51

2.59

2.39

2.56

2.71

2.71

Closed height

(rails lowered) (m)

1.75

1.92

1.53

1.7

2.03

2.03

Closed width (m)

1.76

1.75

1.2

1.78

2.29

2.29

Platform size (m)

2.44 x 1.42

2.79 x 1.6

2.31 x 1.2

3.7 x 1.78

4.81 x 1.83

4.81 x 1.83

Platform length

(deck extended) (m)

4.11

4.5

3.23

N/A

7.38

7.38

Max SWL (kg)

454

454

300

450

1134

1134

Weight (kg)

3845

3949

2470

4110

6890

6826

Alternative machines

6832D

**GS32,
4632**

**GS3369RT,
GS32D-O**

**GS33, 6832D,
SR1023D,
GS3369RT**

**GS43G,
GS53G**



0345 745 0000



SCISSORS

Genie
GS-4047







Haulotte
COM14

Dingli
1412AC

Skyjack
SJ4740

Skyjack
8841

Haulotte
H15SX



Working height (m)

13.7

13.8

13.8

13.86

14.5

15.0

Closed length (m)

2.44

2.74

2.48

2.4

3.49

4.18

Closed height (m)

2.54

2.5

2.62

2.53

2.9

2.77

Closed height (rails lowered) (m)

1.88

2.08

2.09

2.03

2.22

1.91

Closed width (m)

1.19

1.2

1.19

1.19

2.21

2.25

Platform size (m)

2.26 x 1.15

2.3 x 1.2

2.27 x 1.12

2.19 x 1.06

3.51 x 1.76

3.91 x 1.89

Platform length (deck extended) (m)

3.36

3.22

3.17

3.1

4.71

6.0

Max SWL (kg)

350

350

320

350

680

500

Weight (kg)

3221

3175

2990

2970

5289

6340

Alternative machines

COM14,
1412AC

LL15N, 4069,
S152-12

COM14, 4740,
GS-4047

GS-4047,
1412AC

GS43

GS43



0345 745 0000

SCISSORS

LGMG
SR1323D







Genie
GS43

Genie
GS43G

HAB
S152-12

Dingli
1612AC

Skyjack
9250X



Working height (m)

15.0

15.1

15.1

15.2

15.7

17.2

Closed length (m)

4.9

4.88

4.88

3.35

2.84

4.47

Closed height (m)

2.96

2.93

2.93

3.0

2.62

3.16

Closed height

(rails lowered) (m)

2.28

2.25

2.25

2.25

2.09

2.29

Closed width (m)

2.3

2.29

2.29

1.19

1.25

2.34

Platform size (m)

3.98 x 1.83

4.81 x 1.83

4.81 x 1.83

3.04 x 1.18

2.64 x 1.12

4.27 x 1.88

Platform length

(deck extended) (m)

7.4

7.38

7.38

4.24

3.74

7.2

Max SWL (kg)

910

680

680

500

250

681

Weight (kg)

7360

7323

7323

4700

3360

7395

Alternative machines

GS43,
8841

SR1323D,
8841

GS53G







LL15N,
GS-4047

9250X-O



0345 745 0000





Working height (m)

17.5

17.9

18.0

18.15

18.15

18.2

Closed length (m)

3.34

4.9

4.18

4.42

4.88

3.98

Closed height (m)

3.15

3.18

2.99

3.19

3.15

3.15

Closed height

(rails lowered) (m)

2.38

2.5

2.11

2.4

2.47

2.47

Closed width (m)

1.19

2.3

2.25

2.3

2.29

2.29

Platform size (m)

3.04 x 1.18

3.98 x 1.83

4.0 x 1.89

4.31 x 1.9

4.81 x 1.83

4.81 x 1.83

Platform length

(deck extended) (m)

4.25

7.4

6.0

7.12

7.38

7.38

Max SWL (kg)

500

680

500

681

680

680

Weight (kg)

5350

8200

7360

8215

8050

9541

Alternative machines

LL15N

GS53,
H18SX

GS53

GS53, 9250,
9250X, H18SX

LL20X,
9250

GS43G



0345 745 0000



SCISSORS

Holland Lift
165-12







Holland Lift
HL190E

Dingli
1912DC

Holland Lift
195-12

Holland Lift
HL220H

Holland Lift
HL220D



Working height (m)

18.5

18.8

19.0

21.4

21.7

21.9

Closed length (m)

3.74

3.74

4.72

3.74

4.84

4.84

Closed height (m)

3.4

3.4

3.57

3.74

3.65

3.65

Closed height (rails lowered) (m)

2.65

2.24

2.74

3.01

2.88

2.88

Closed width (m)

1.2

1.2

1.25

1.2

2.44

2.44

Platform size (m)

3.38 x 1.16

3.38 x 1.16

4.3 x 1.19

3.38 x 1.16

4.5 x 2.3

4.5 x 2.3

Platform length (deck extended) (m)

4.88

4.88

6.1

4.88

7.0

7.0

Max SWL (kg)

500

500

750

500

750

750

Weight (kg)

7985

7985

11750

9120

13900

12140

Alternative machines

180-12, LL15N,
LL17E, S175-12

195-12,
1912DC

HL190E

SL180N






HL220D, LL20X,
SL210, S225

LL20X, LL26X,
HL235D



0345 745 0000





Working height (m)

22.0

22.0

22.5

23.2

27.0

Closed length (m)

4.72

4.95

4.84

5.75

6.57

Closed height (m)

3.82

3.86

3.72

4.01

3.89

Closed height

(rails lowered) (m)

2.99

3.0

2.88

3.1

3.13

Closed width (m)

1.25

2.46

2.39

2.49

2.65

Platform size (m)

4.3 x 1.19

4.59 x 2.25

4.5 x 2.36

5.22 x 2.40

6.15 x 2.50

Platform length

(deck extended) (m)

6.1

7.29

7.2

7.32

8.25

Max SWL (kg)

600

750

750

1000

1000

Weight (kg)

12350

13000

11000

18100

21910

Alternative machines

195-12

S225-24, SL210,
HL220D

LL20X,
LL26X

LL20X, LL26X,
HL220D

LL26X,
SL245



0345 745 0000



SCISSORS

Holland Lift
HL275H







Holland Lift
HL275D

Dingli
2825RT

HAB
S280-25

Dingli
3225RT

Holland Lift
HL340D



Working height (m)

27.2

27.2

28.0

28.0

32.0

33.5

Closed length (m)

6.57

6.57

5.96

5.96

6.73

7.02

Closed height (m)

3.89

3.89

4.13

4.1

4.13

3.63

Closed height (rails lowered) (m)

3.13

3.13

3.19

3.4

3.19

2.87

Closed width (m)

2.5

2.5

2.5

2.5

2.55

2.98

Platform size (m)

6.15 x 2.35

6.15 x 2.35

5.48 x 2.45

5.48 x 2.44

6.2 x 2.45

6.66 x 2.80

Platform length (deck extended) (m)

8.25

8.25

7.58

7.57

8.3

9.66

Max SWL (kg)

1000

1000

1000

750

1000

1000

Weight (kg)

25100

22670

19800

18000

23400

31350

Alternative machines

S280

M250, LL26X,
S280

S280-25,
LL26X

2825RT,
LL26X

HL340D

3223RT



0345 745 0000

33



Booms

We have a wide range of electric, hybrid, gas and diesel boom lifts for hire. For indoor and outdoor jobs requiring up-and-over access, our booms offer working height access up to 58.5m and useful outreach of up to 24m.

For more information, advice, training and to hire from our wide range of **boom lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



BOOMS

Haulotte
STAR10A



10.0

3.0

Working height (m)

Horizontal outreach (m)

Closed length (m)

Closed height (rails up) (m)

Platform size (m)

Rotation (°)

Max SWL (kg)

Weight (kg)

2.7

1.99


0.78 x 0.98

345

200

2677

JLG
Toucan 10E



10.1

3.38

2.82

1.99


0.70 x 0.90

360

200

2980

Genie
Z30N



10.89

6.25

5.31

2.0


1.17 x 0.76

355

227

6450

Skyjack
SJ30 ARJE



11.0

6.26

5.51

1.98


1.17 x 0.76

355

227

5750

JLG
30JP



11.14

6.25

5.59

2.0

1.22 x 0.76

140

227

6849

Alternative machines

0345 745 0000

Harness ON™
fitted on
all BOOMS

STAR10,
AMWP11.5-8100



STAR10,
STAR10A,
Toucan12E+




30J, 30JP
40NJ



Z30N, HA12CJ,
30JP




G30N, 30J

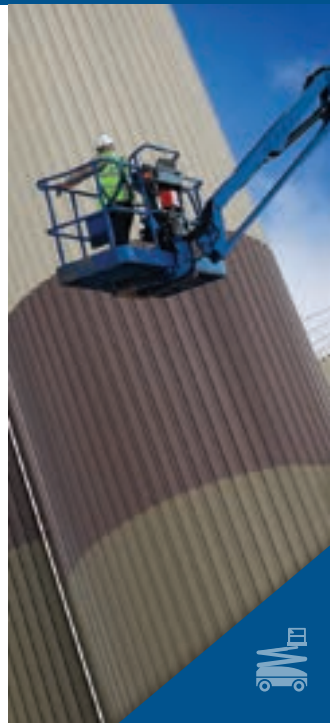

BOOMS



Dingli
AMWP
11.5-8100



11.2

3.0

2.53

1.99


0.87 x 0.62

345

200

2950

Dingli
AMWP
11.5-81



11.2

3.0

2.72

1.99


0.87 x 0.62

345

200

2950

Haulotte
HA12CJ



11.68

6.94

5.36

1.99

1.14 x 0.8

355

250

7065

Genie
Z33E



12.0

5.57

4.17

1.98


1.16 x 0.76

400

200

3665

Nifty Lift
HR12NBS



12.2

6.1

4.1

1.9


1.10 x 0.65

360

200

3435

Genie
G34N



12.52

6.78

5.72

2.0

1.42 x 0.76

355

227

5171

Working height (m)

Horizontal outreach (m)

Closed length (m)

Closed height (rails up) (m)

Platform size (m)

Rotation (°)

Max SWL (kg)

Weight (kg)

Alternative machines

STAR10,
STAR10A



STAR10, STAR10A,
Toucan10E,
Toucan12E+



IPAF
3b

G30N, Z30N,
30JP



IPAF
3b

HR12NB



IPAF
3b

HR12N, 40NJ



IPAF
3b

HR12NB,
Z33



IPAF
3b

0345 745 0000

Harness ON™
fitted on
all BOOMS

BOOMS

Haulotte
HA15P

Nifty Lift
**HR15
NBS**








Nifty Lift
HR15NH

Genie
S45XCS

Genie
Z45DJX

JLG
45AJHCS

Skyjack
SJ45AJ+



**Working
height (m)**

14.87

15.4

15.5

15.56

15.69

15.72

15.72

**Horizontal
outreach (m)**

8.65

9.6

9.7

11.0

7.6

7.62

6.93

Reach below ground

N/A

N/A

N/A

1.27

N/A

N/A

1.4

Closed length (m)

6.65

6.3

6.4

9.47

6.78

6.57

6.0

Closed height
(rails up) (m)

2.1

2.1

1.99

2.51

2.08

2.27

2.06

Closed width (m)

1.52

1.5

1.5

2.49

2.23

2.35

2.29

Platform size (m)

1.15 x 0.8

1.5 x 0.70

1.5 x 0.8

2.44 x 0.91

1.82 x 0.76

1.83 x 0.76

1.83 x 0.76

Rotation (°)

355

360

360

Continuous

359

355

355

Max SWL (kg)

230

225

225

454

227

454

300

Weight (kg)

7230

6680

7250

7394

6542 / 6892*

7507

5075

Alternative machines

HR15NH,
HR15NBS

40NJ,
Z45BJ

HR15NB

460SJHCS,
SJ45T+

Z45D,
Z45D-R

Z45DJXC

Z45DJXC,
45AJHCS

0345 745 0000



37

Harness ON™
fitted on
all BOOMS

* Air filled / Foam filled

BOOMS

JLG
45JSX







JLG
45EJS

JLG
45MJ

Genie
S45X

Skyjack
SJ45T+

LGMG
AR14JE



Working height (m)

15.72

15.72

15.72

15.72

15.75

15.8

Horizontal outreach (m)

7.47

7.24

7.24

11.18

12.1

7.81

Reach below ground

N/A

N/A

N/A

1.5

2.0

N/A

Closed length (m)

2.24

6.45

6.5

8.48

8.83

6.66

Closed height (rails up) (m)

2.24

2.01

2.01

2.49

2.4

1.98

Closed width (m)

1.98

1.75

1.75

2.3

2.29

1.8

Platform size (m)

1.83 x 0.76

0.76 x 1.52

1.52 x 0.76

1.83 x 0.76

2.44 x 0.91

1.83 x 0.76

Rotation (°)

180

360

360

Continuous

Continuous

355

Max SWL (kg)

230

230

230

227

454

230

Weight (kg)

7242

6722

6532

6709

7160

7500

Alternative machines

HA16SPX

Z45EJ

45MJP

S45XCS,
460SJHCS

Z45EJ,
Z45E, 45EJ

0345 745 0000

38

Harness ON™
fitted on
all BOOMS



BOOMS

Genie
Z45DJXC

Genie
Z45FES




Genie
Z45BJ

Genie
Z45EJ



Haulotte
HA16PX

Haulotte
HA16RTJ



15.86

7.55

6.66

2.25


2.29

1.83 x 0.76

355

454

6984



15.92

6.94

5.87

2.29


1.83

1.83 x 0.76

355

300

6559



15.94

7.65

6.83

2.0


1.79

1.83 x 0.76

355

227

7620



15.94

7.65

6.83

2.0

1.79

1.83 x 0.76

355

227

7394



16.0

9.15

6.95

2.3


2.3

1.8 x 0.80

360

230

6950



16.0

8.3

6.75

2.3

2.3

1.83 x 0.8

355

230

6200

Working height (m)

Horizontal outreach (m)

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg)

Weight (kg)

Alternative machines

45AJHCS

HR15RTH

Z45EJ

45EJ

Z4525DJX,
45JSX, SJ46AJ

Z4525DJX,
45JSX, SJ46AJ

0345 745 0000

39

Harness ON™
fitted on
all BOOMS



BOOMS

Genie
Z4525DJX






JLG
460SJHCS

LGMG
AR14J

Skyjack
SJ46AJ

Nifty Lift
HR17H

MEC
TITAN60



Working height (m)

16.05

16.05

16.09

16.1

17.2

20.0

Horizontal outreach (m)

7.52

12.2

7.67

7.54

9.4

14.6

Reach below ground

N/A

7.0

N/A

1.5

N/A

N/A

Closed length (m)

6.65

8.91

6.77

6.5

6.35

7.0

Closed height (rails up) (m)

2.13

2.47

2.17

2.07

2.1

3.4

Closed width (m)

2.29

2.31

2.31

2.29

2.0

2.6

Platform size (m)

1.83 x 0.76

2.44 x 0.91

1.83 x 0.76

1.83 x 0.76

1.8 x 0.85

6.7 x 2.28

Rotation (°)

355

360

355

360

360

180

Max SWL (kg)

227

454

230

227

225

1350

Weight (kg)

6574

9306

7160

6500

5000

18000

Alternative machines

45AJ, SJ46AJ, HA16RTJ

S45XCS, SJ45T+

45AJ, Z4525DJX, SJ46AJ, HA16RTJ

Z4525DJX, Z45DJX, 45JSX

HR21H

TITAN40

0345 745 0000

Harness ON™
fitted on
all BOOMS

40



BOOMS

Genie
Z60FE









Skyjack
SJ60AJ+

JLG
60AJX

JLG
60AJHCS

Genie
G60X

Haulotte
**HA20RTJ
PRO**



**Working
height (m)**

20.16

20.29

20.29

20.3

20.39

20.6

**Horizontal
outreach (m)**

11.15

11.56

12.12

12.3

11.05

12.2

Reach below ground

2.46

1.5

N/A

2.5

N/A

N/A

Closed length (m)

8.15

8.59

8.82

9.15

8.15

8.8

Closed height
(rails up) (m)

2.54

2.54

2.56

2.58

2.69

2.51

Closed width (m)

2.49

2.44

2.44

2.49

2.46

2.42

Platform size (m)

1.83 x 0.76

2.44 x 0.91

1.83 x 0.91

2.44 x 0.91

1.83 x 0.76

1.83 x 0.8

Rotation (°)

355

Continuous

180

360

Continuous

Continuous

Max SWL (kg)

227

454

227

454

227

230

Weight (kg)

7756

8557

10650

11986

10025 / 10765*

9600

Op width full (m)

2.49

N/A

N/A

N/A

N/A

N/A

Alternative machines

HR21H

60AJHCS, Z62,
HA20RTJPRO

60AJ,
60AJX-P

SJ60AJ+

G60-R, HR21D,
60AJX, Z62

G60X, HA260PX,
HR21D

0345 745 0000

41

Harness ON™
fitted on
all BOOMS



* Air filled / Foam filled



BOOMS

JLG
660
SJHCS


JLG
66JX

Skyjack
SJ66T+

Dingli
BA22ERT

Haulotte
HT23RTJ

Dingli
BT22HRT



22.1

17.41

1.8
10.01

2.58

2.49


2.44 x 0.91

Continuous

454

13282

N/A



22.12

17.3

N/A
10.21

2.56

2.43


1.83 x 0.91

180

227

13500

N/A



22.19

17.38

3.0
10.4

2.59

2.44


1.83 x 0.91

360

454

12485

N/A



22.21

12.72

1.77
9.55

2.49

2.29


1.83 x 0.79

360

230

10100

N/A



22.5

18.3

4.0
10.4

2.7

2.47


2.44 x 0.91

Continuous

230

13400

N/A



22.51

17.28

N/A
10.16

2.65

2.5

2.44 x 0.91

Continuous

454

13200

N/A

Working
height (m)

Horizontal
outreach (m)

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg)

Weight (kg)

Op width full (m)

Alternative machines

S65XC, HT23RTJ,
SJ66T+, LGT22J

G65,
G65X

S65XC, HT23RTJ,
LGT22J, 660SJHCS

S65X, SJ66T+,
LGT22J, 660SJHCS


S60FE

0345 745 0000

43


Harness ON™
fitted on
all BOOMS






23.8

17.5




25.6

16.2




25.6

18.29




26.3

15.9



26.3

15.74



26.38

15.8

Working height (m)

Horizontal outreach (m)

Reach below ground

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg)

Weight (kg)

Op width full (m)

2.3

10.6

2.79

2.49

2.44 x 0.9

Continuous

450

12300

N/A

N/A

12.0

2.71

2.4

1.8 x 0.8

360

230

15890

N/A

N/A

11.27

3.0

2.49

2.44 x 0.91

Continuous

227

17010

N/A

4.0

11.22

2.97

2.48

2.44 x 0.91

360

454

17500

N/A

N/A

11.12

3.0

2.44

1.83 x 0.91

360

230

15600

N/A

3.0

11.13

3.0

2.49

1.83 x 0.91

Continuous

230

16110

N/A

Alternative machines

S65XC, HT23RTJ, SJ66T+, 660SJHCS

80JX, SJ85AJ

80JX, SJ85AJ

Z80, SJ85AJ

HR28H, BA28HRT

0345 745 0000

Harness ON™
fitted on all BOOMS



BOOMS

Genie
S85XC







Skyjack
SJ85AJ

Genie
S85

Nifty Lift
HR28H

Dingli
BA28HRT

Dingli
BA28RTS



Working height (m)

27.74

27.9

27.9

28.0

28.1

28.1

Horizontal outreach (m)

22.71

17.02

23.32

19.0

19.4

19.4

Reach below ground

2.69

2.0

2.89

N/A

6.61

6.61

Closed length (m)

12.37

11.63

12.4

9.28

11.83

11.83

Closed height (rails up) (m)

2.8

2.67

2.8

2.7

2.89

2.89

Closed width (m)

2.49

2.49

2.5

2.49

2.5

2.5

Platform size (m)

1.83 x 0.76

1.83 x 0.91

1.83 x 0.76

2.4 x 0.9

2.44 x 0.91

2.44 x 0.91

Rotation (°)

Continuous

Continuous

Continuous

360

Continuous

Continuous

Max SWL (kg)

300/454

340

227

280

250

250

Weight (kg)

17917

16965

17236

14700

18400

18400

Op width full (m)

N/A

N/A

2.5

N/A

N/A

N/A

Alternative machines

860SJHCS
BT28RT

Z80,
80JX

860SJ,
G85X

H800AJ,
BA28HRT

HR28H,
H800AJ

Z80
80JX

0345 745 0000

Harness ON™
fitted on
all BOOMS

45



BOOMS


JLG
860
SJHCS

JLG
860SJ

Dingli
BT28RT

Dingli
BT28HRT


Dingli
BT30SRT



28.21

22.78


1.2
12.19
3.05
2.5
2.44 x 0.91
Continuous
454
17255
N/A



28.21

22.86

3.0
12.19
3.05
2.49
2.44 x 0.91
360
227
16511
2.5



28.6

21.3


N/A
11.66
2.87
2.5
2.44 x 0.91
Continuous
454
18400
N/A



28.6

21.9

N/A
11.66
2.87
2.5
2.44 x 0.91
Continuous
454
18400
N/A



30.3

23.0

N/A
12.3
2.87
2.5
2.44 x 0.91
Continuous
454
18900
N/A

Working
height (m)

Horizontal
outreach (m)

Reach below ground
Closed length (m)
Closed height
(rails up) (m)
Closed width (m)
Platform size (m)
Rotation (°)
Max SWL (kg)
Weight (kg)
Op width full (m)

Alternative machines

S85XC,
BT28RT


G85X

S85XC,
860SJHCS

0345 745 0000

Harness ON™
fitted on
all BOOMS

46

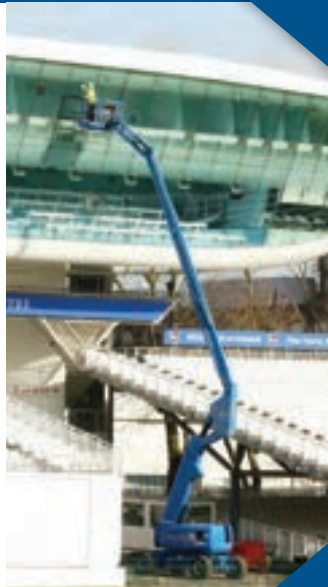

BOOMS

Haulotte
HA32PX







JLG
1200SJP

Genie
SX125XC

JLG
1250AJP

Genie
S125

Haulotte
HA41PX



Working height (m)

31.8

38.73

40.1

40.1

40.15

41.5

Horizontal outreach (m)

21.3

22.86

24.38

19.25

24.38

19.8

Reach below ground

4.0

N/A

2.69

N/A

N/A

N/A

Closed length (m)

11.16

10.64

12.19

11.45

14.25

12.6

Closed height (rails up) (m)

2.7

3.05

3.05

3.05

3.07

N/A

Closed width (m)

2.5

2.49

2.49

2.49

2.49

2.5

Platform size (m)

2.44 x 0.80

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

2.44 x 0.8

Rotation (°)

Continuous

Continuous

360

Continuous

Continuous

360

Max SWL (kg)

250

230

454

227

20248

230

Weight (kg)

20800

18500

20700

19958

20248

23000

Op width full (m)

3.33

3.81

N/A

3.81

3.35

3.3

Alternative machines

1250AJP, Z135, ZX135

S125

1200SJP

ZX135, Z135

1200SJP, 1250SJP

Z135, 1250AJP







    
0345 745 0000



47

Harness ON™
fitted on
all BOOMS 





Working height (m)

41.5

43.15

43.15

43.15

43.3

48.15

Horizontal outreach (m)

20.1

27.43

21.26

21.26

24.38

23.55

Reach below ground

1.5

6.0

5.87

5.87

N/A

6.1

Closed length (m)

13.1

19.76

12.93

12.93

11.86

15.1

Closed height (rails up) (m)

3.0

3.05

3.07

3.09

3.05

3.1

Closed width (m)

2.53

2.49

2.46

2.49

2.49

2.5

Platform size (m)

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

0.91 x 2.44 (5*)

Rotation (°)

Continuous

Continuous

Continuous

Continuous

Continuous

Continuous

Max SWL (kg)

230

454

272

272

230

270/450

Weight (kg)

23900

21747

20366

20502

20400

26127

Op width full (m)

3.3

3.94

3.94

5.03

3.81

5.0

Alternative machines

Z135,
1250AJP

1350SJP

ZX135,
1250AJP

Z135,
1250AJP

Z135, 1200SJP,
S125

    
0345 745 0000

48

Harness ON™
fitted on
all BOOMS 




BOOMS


Genie
SX150

Genie
SX180


JLG
1850SJP



48.02



56.86



58.56

Working height (m)

Horizontal outreach (m)

24.38

24.38

24.38

Reach below ground

0.91

N/A

1.47

Closed length (m)

16.18

14.33

14.57

Closed height (rails up) (m)

3.05

3.05

3.05

Closed width (m)

2.49

2.49

2.49

Platform size (m)

2.44 x 0.91

2.44 x 0.91

2.44 x 0.91

Rotation (°)

Continuous

Continuous

Continuous

Max SWL (kg)

340

340

454

Weight (kg)

23236

25095

27170

Op width full (m)

5.03

5.03

5.03

Alternative machines

SX180

1850SJP

SX180

    
0345 745 0000

49

Harness ON™
fitted on
all BOOMS 





Van mounts

With working heights of between 12m and 16.5m, our range of van mounted platforms are available to hire on an operated or self-drive basis.

For more information, advice, training and to hire from our range of **van mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



VAN MOUNTS

GSR
VT125K

Versalift
VT12E




GSR
VI14GS

GSR
VM14GS

Klubb
VR13KL

Versalift
V14E

Versalift
V16E



Working height (m)

12.9

13.0

13.75

13.75

13.8

14.2

16.5

Horizontal outreach (m)

7.3

7.0

7.8

7.8

8.0

7.3

7.3

Closed length (m)

6.54

6.74

7.0

7.2

6.51

7.34

8.22

Closed height (rails up) (m)

3.8

3.15

3.45

3.45

3.3

3.8

4.0

Closed width (m)

2.2

2.45

2.2

2.2

2.2

2.2

2.2

Platform size (m)

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.1 x 0.6

1.0 x 0.6

1.0 x 0.6

SWL (kg)

200

200

250

250

200

200

200

Weight (kg)

3500

3500

5000

5000

3500

5200

6500

Op width full (m)

2.45

2.45

2.25

2.25

2.5

2.25

2.3

Min op width (m)

2.45

2.45

2.25

2.25

2.5

2.25

2.3

Overall spare payload (vans) (kg)

200

200

900

900

200

800

1000

Alternative machines

VT12E, VR13KL

VT125K, VR13KL

V14E, VM14GS

V14E, VI14GS

VT12E, VT125K

VI14GS, VM14GS



0345 745 0000

51





Truck mounts

Our truck mounted cherry pickers offer flexible access from 13m to 90m, with both self-drive and operated hire options available.

For more information, advice, training and to hire from our wide range of **truck mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



TRUCK MOUNTS

Versalift
T1135EX






GSR
T14GS

GSR
T17GS

CTE
T20CJHV

GSR
T20GS

CTE
T20HC



Working height (m)

13.3

14.0

17.1

20.0

20.0

20.0

Horizontal outreach (m)

6.1

8.0

9.5

12.0

8.2

9.0

Reach below ground

N/A

N/A

N/A

N/A

N/A

N/A

Max horiz outreach* (m)

N/A

N/A

6.7

N/A

N/A

N/A

Closed length (m)

4.7

7.2

7.1

7.59

7.46

6.76

Closed height (m)

2.6

2.95

2.95

2.96

2.77

2.5

Closed width (m)

2.0

2.1

2.2

2.25

2.1

2.1

Platform size (m)

1.0 x 0.6

1.4 x 0.7

1.4 x 0.7

1.4 x 0.7

1.4 x 0.7

1.40 x 0.70

SWL (kg)

230

200

250

300

280

300

Weight (kg)

3500

3500

3500

3500

3500

3500

Op width full (m)

2.4

2.4

2.4

3.68

2.3

2.93

Min op width (m)

2.4

2.4

2.4

2.33

2.3

2.93

Point load front/rear

20kN / 20kN

28kN / 28kN

28kN / 28kN

20kN / 30kN

25kN / 18kN

28kN / 28kN

Alternative machines

TLR135EX



T14C



T18AS



T20M



T20C



T20C, T19C



0345 745 0000

53

* With full safe working load



TRUCK MOUNTS

Multitel
T20M







CTE
T21JC

GSR
T220GSR

GSR
T22GS

GSR
T22GSH

CTE
T23C



Working height (m)

20.0

21.0

21.75

22.0

22.0

23.0

Horizontal outreach (m)

11.0

10.0

11.4

17.7

17.7

10.0

Reach below ground

2.0

N/A

1.0

N/A

N/A

N/A

Max horiz outreach* (m)

8.6

N/A

8.45

N/A

N/A

10.0

Closed length (m)

7.65

6.8

7.6

8.7

8.7

7.48

Closed height (m)

3.0

2.6

2.76

3.55

3.55

2.8

Closed width (m)

2.1

2.1

2.25

2.5

2.5

2.25

Platform size (m)

1.40 x 0.70

1.40 x 0.70

1.4 x 0.7

1.8 x 0.8

1.8 x 0.8

1.4 x 0.7

SWL (kg)

250

280

250

280

280

250

Weight (kg)

3500

3500

3500

7500

8200

3500

Op width full (m)

3.4

2.9

2.5

4.5

4.5

3.92

Min op width (m)

2.5

2.9

2.5

2.5

2.5

N/A

Point load front/rear

30kN / 19kN

28kN / 28kN

22.5kN / 22kN

60kN / 60kN

60kN / 60kN

28kN / 28kN

Alternative machines

T20C, T21JC



T20C



T21JC



T22AS



T22GS



T23C



0345 745 0000

54

* With full safe working load

TRUCK MOUNTS

Ruthmann
T260R







GSR
T26GS

Ruthmann
T28RX

Ruthmann
T33R

Ruthmann
T33RH

Bronto
T35BEM



Working height (m)

26.0

26.0

28.0

33.0

33.0

35.0

Horizontal outreach (m)

17.0

14.0

21.3

21.2

21.2

25.0

Reach below ground

N/A

N/A

N/A

N/A

N/A

1.0

Max horiz outreach* (m)

17.0

14.0

16.0

16.5

16.5

28.6

Closed length (m)

7.86

7.8

8.12

8.7

8.7

10.2

Closed height (m)

3.05

3.6

3.8

3.56

3.56

3.7

Closed width (m)

2.3

2.5

2.5

2.5

2.5

2.5

Platform size (m)

1.4 x 0.7

1.4 x 0.7

1.7 x 0.86

1.7 x 0.86

1.7 x 0.86

2.4 x 0.9

SWL (kg)

250

280

320

320

320

450

Weight (kg)

3500

7500

11000

7490

8600

18000

Op width full (m)

3.85

3.5

3.8

5.32

5.32

5.9

Min op width (m)

2.34

3.5

2.5

2.53

2.53

2.5

Point load front/rear

32kN / 25kN

60kN / 60kN

110kN / 50kN

56kN / 42kN

56kN / 42kN

120kN / 120kN

Alternative machines



0345 745 0000

55

* With full safe working load

T26C



T26CX



T33RH



T33R



T35BEM



TRUCK MOUNTS

Ruthmann
T37R







Bronto
T38B

Bronto
T44B

Palfinger
T48P

Bronto
T50JB

Bronto
T56B



Working height (m)

37.0

38.0

44.0

48.0

49.5

56.0

Horizontal outreach (m)

30.0

25.3

24.0

28.0

35.0

37.3

Reach below ground

6.0

6.5

5.0

13.5

11.0

9.0

Max horiz outreach* (m)

21.0

21.0

21.0

22.0

25.0

32.0

Closed length (m)

8.9

10.0

10.0

10.4

12.0

11.9

Closed height (m)

3.9

3.7

3.8

4.0

4.0

3.7

Closed width (m)

2.55

2.5

2.5

2.55

2.5

2.5

Platform size (m)

2.3 (3.6) x 0.90

2.3 (3.7) x 1.05

2.4 (3.7) x 1.0

2.15 (3.8) x 1.05

2.20 (3.7) x 0.90

2.4 (3.7) x 1.0

SWL (kg)

500

600

600

600

600

600

Weight (kg)

18000

18000

18000

17600

26000

26000

Op width full (m)

6.4

6.2

6.2

6.3

8.0

9.0

Min op width (m)

2.6

2.8

2.8

2.55

2.8

3.0

Point load front/rear

170kN / 140kN

150kN / 150kN

150kN / 150kN

160kN / 160kN

190kN / 190kN

180kN / 180kN

Alternative machines

T38B

T37B, T37R

T50JB

T48P, T56B

T50JB



56




* With full safe working load

TRUCK MOUNTS

Bronto
T70B

Bronto
T70B-XR

Bronto
T90B



Working height (m)

70.0

70.0

90.0

Horizontal outreach (m)

34.8

34.8

31.0

Reach below ground

6.0

11.0

12.0

Max horiz outreach* (m)

30.0

30.0

29.0

Closed length (m)

12.5

12.0

15.6

Closed height (m)

4.2

3.9

4.0

Closed width (m)

2.5

2.4

2.5

Platform size (m)

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

SWL (kg)

600

600

600

Weight (kg)

36000

36000

48000

Op width full (m)

8.0

8.0

7.0

Min op width (m)

3.2

3.2

N/A

Point load front/rear

255kN / 255kN

230kN / 230kN

270kN / 270kN

Alternative machines

T90B

T70B

T70B



0345 745 0000



57

* With full safe working load





Tracked booms

Tracked boom lifts are fitted with an articulating or telescopic boom, mounted on tracks to reduce ground pressure. They are fitted with outriggers to add stability, making them perfect for difficult access challenges. We offer both self-drive and operated hire options with working heights of up to 31m and horizontal outreach of up to 14.7m.

For more information, advice, training and to hire from our wide range of **tracked booms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



TRACKED BOOMS

Hinowa
TB14HB

Hinowa
TB14HE








Hinowa
TB15HB

Hinowa
TB15HE



Hinowa
TB17HB



Working height (m)

14.0

14.0

15.4

15.4

17.06

Horizontal outreach (m)

7.0

7.0

6.6

6.6

7.5

Closed length (m)

4.06

4.06

4.02

4.02

4.52

Closed height (rails up) (m)

1.99

1.99

1.99

1.99

2.0

Closed width (m)

0.78

0.78

0.75

0.75

0.79

Platform size (m)

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg)

200

200

230

230

230

Weight (kg)

1750

1750

1950

1950

2280

Outrigger footprint (m)

2.7 x 2.7

2.7 x 2.7

2.8 x 2.8

2.8 x 2.8

2.88 x 2.89

Min op width (m)

2.7

2.7

2.8

2.8

2.88

Alternative machines

TB14HE, TB17HE
TB17HB

TB14HB, TB17HE
TB17HB

TB15HE, TB17HE
TB17HB

TB15HB, TB17HE
TB17HB

TB17HE, TB20HE
TB20HB

0345 745 0000

59

Harness ON™
fitted on
all BOOMS



TRACKED BOOMS






Hinowa
TB17HE

Platform Basket
TB18PB

Hinowa
TB20HB

Hinowa
TB20HE

JLG
TB20JB



Working height (m)

17.06

17.6

20.1

20.1

20.1

Horizontal outreach (m)

7.5

9.2

9.7

9.7

9.85

Closed length (m)

4.52

5.21

5.01

5.01

5.01

Closed height (rails up) (m)

2.0

1.95

1.99

1.99

1.99

Closed width (m)

0.79

0.78

0.79

0.79

0.79

Platform size (m)

1.33 x 0.69

0.70 x 1.30

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg)

230

200

230

230

230

Weight (kg)

2280

2350

2880

2880

2880

Outrigger footprint (m)

2.88 x 2.89

3.1 x 3.1

2.92 x 2.92

2.92 x 2.92

2.92 x 2.92

Min op width (m)

2.88

3.1

2.92

2.92

2.92

Alternative machines

TB17HB, TB20HE
TB20HB

TB20HB

TB20HE, TB26HE
TB26HB

TB20HB, TB26HE
TB26HB

TB20HE, TB26HE
TB26HB, TB20HB

0345 745 0000

Harness ON™
fitted on
all BOOMS

60







TRACKED BOOMS

Hinowa
TB26HB

Hinowa
TB26HE

Multitel
TB30MB

Teupen
TB31TB



Working height (m)

25.7

25.7

30.0

31.0

Horizontal outreach (m)

13.6

13.6

14.0

14.7

Closed length (m)

6.34

6.34

6.65

7.23

Closed height (rails up) (m)

1.98

1.98

2.3

1.98

Closed width (m)

0.99

0.99

1.6

1.58

Platform size (m)

1.33 x 0.69

1.33 x 0.69

0.70 x 1.60

1.20 x 0.80

Rotation (°)

360

360

400

360

Max SWL (kg)

230

230

270

250

Weight (kg)

4415

4415

5600

4350

Outrigger footprint (m)

4.07 x 3.97

4.07 x 3.97

6.4 x 4.2

5.45 x 5.15

Min op width (m)

3.97

3.97

3.3

2.75

Alternative machines

TB26HE

TB26HB

TB30TB

TB26HB
TB26HE



Harness ON™
fitted on
all BOOMS





Telehandlers

Ideal for lifting products and equipment up to heights of 17.5m, our range of telehandlers provide safe working solutions. The range includes a lifting capacity of up to 4000kg.

For more information, advice, training and to hire from our range of **telehandlers**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.




TELE-HANDLERS

Manitou
MT625H

Manitou
MT1033
EASY


Manitou
MT1440
EASY

Manitou
MT1840
EASY




5.85

3.4




9.98

7.15



13.53

9.46



17.55

13.08

Working height (m)

Horizontal outreach (m)

Closed length (m)

Closed height (m)

Closed width (m)

Max lift cap (kg)

Max lift cap (with full reach) (kg)

Weight (with forks) (kg)

Turn radius (m)

3.83

1.92

1.81

2500

800

4800

3.31

4.93

2.3

2.33

3300

1000

7790

3.8

6.13

2.45

2.36

4000

1500

10900

3.94

6.15

2.45

2.36

4000

850

11710

3.94

Alternative machines



RT⁴



RT⁴



RT⁴



RT⁴

0345 745 0000





How to use this guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height. The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on **0345 745 0000**

Product Type

Working Envelope

Shows approximate area of working space provided by the product.

Working Height / Horizontal Outreach

Specification

These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.

Alternative Machines

Alternative or similar machines.

BOOMS	J.G. 660 SJHCS	J.G. 66JX	Scissor S.J66T+	Drift BA22ERT	Hybrids HT23RTJ	Drift BT22HRT
Working height (m)	22.1	22.12	22.19	22.21	22.5	22.51
Horizontal outreach (m)	17.41	17.3	17.38	12.72	18.3	17.28
Reach below ground	1.8	N/A	3.0	1.77	4.0	N/A
Closed length (m)	10.21	10.79	10.4	9.55	10.4	10.16
Walk up (m)	2.58	2.96	2.59	2.35	2.7	2.65
Platform size (m)	2.49	2.48	2.44	2.33	2.47	2.5
Rotation (°)	2.44 x 0.91	1.83 x 0.91	2.44 x 0.91	1.83 x 0.79	2.44 x 0.91	2.44 x 0.91
Continence	180	180	360	Continence	Continence	Continence
Max SWL (kg)	454	227	454	230	230	454
Weight (kg)	12882	13800	12885	10160	13460	13200
Op width (m)	N/A	N/A	N/A	N/A	N/A	N/A
Alternative machines	S66C HT23RTJ S46T1 LCT22	GEL G65H	S66C HT23RTJ LCT22 PRODUCE	GEL LCT22 PRODUCE	G65H LCT22 PRODUCE	S66C LCT22 PRODUCE
0345 745 0000						

Product Code

Unique reference number. *(Please note this will not necessarily correspond with the original manufacturer's model number or product code)*

Key

These symbols indicate standard features and optional extras available to hire with the platform. *See below for key table.*

Product Type (icon)

Indicates powered access classification, e.g. low level, scissor lift or boom lift.

Electric / Hybrid

Electric products can be identified by green ELECTRIC product badge.



Hybrid products have jade HYBRID badge.



KEY



Battery power



Diesel power



Lithium battery



Hybrid power



Dual fuel option



Gas power option



Rough terrain (2 wheel drive)



Rough terrain (4 wheel drive)



Non-marking tyres

Standard features



IPAF licence type



IPAF licence type



IPAF licence type



IPAF licence type



IPAF licence type



Tracked



Mast boom



Articulating boom



Straight telescopic boom



Outrigger legs



Maximum people in cage*



Push around vehicles



Operator powered



Indoor use only



Self drive



JIB rotation



C1 driving licence type



B driving licence type

Optional extras



SkySiren®



SkySiren® PCS™



SkySentry™



SkyRak®



SkyRakPlus®



SkyRakBoom®



SkyTel™



SkyRakEdge™



SkyShield



SkyScreen™



Material Handling Attachments



Power to platform



Generator



Camera pod



Circular camera cage



Wendy lighting frame



SkyRakMulti™



Call us today

0345 745 0000



Join us on

[LinkedIn.com/company/Nationwide-Platforms](https://www.linkedin.com/company/nationwide-platforms)



Like us on

[Facebook.com/NationwidePlatforms](https://www.facebook.com/nationwideplatforms)



Follow us on X

[@NWPlatforms](https://twitter.com/NWPlatforms)



Watch our latest videos on

[YouTube.com/NationwidePlatforms](https://www.youtube.com/NationwidePlatforms)



Nationwide Platforms

A **LOXAM** Company



0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms

15 Midland Court,
Central Park,
Lutterworth,
Leicestershire,
LE17 4PN

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order.

No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.